falmec

SINTESI

01SINTESI-90 Bordemfang
Sintesi Black - 600 m3/h

Sortiment
Bordemhætte

EAN Kode
8034122900278

Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

4 kogezoner med aut. grydegenkendelse
Restvarme indikator
Hold varm funktion
9 varmetrin + powerfunktion (Dobble boost)
Automatisk gryde sensor
Timer. Minutur
Børnesikring
Pause og genkald
Flex zone
Dobbelt brofunktion
Automatisk sluk-timer
Power management system på 3 trin: 2.8 kw, 3.5 kw, 7.4 kw
Børsteløs motor
Touch glidekontrol med rødt LED-display
Advarsel for vedligeholdelse af fedtfiltre
Induktion

MULIGHEDER FOR TILVALG

KACL.930
Kit kul / zeolitfilter
KACL.931
Kit. Løst kul / zeolitfilter
KACL.951
Underbase Slim filter unit (h60mm)
KACL.952
Filter replacement (underbase Slim filter unit - h60mm)
KACL.955
Base grid (underbase Slim filter unit - h60mm)

TEKNISK BESKRIVELSE

Installation
Kogeplade
Dimensioner
88 cm
Materiale
Sort Schott glas
Black stainless steel frame
Motor
600 m³/h
Betjening
Betjening med touch
Hastighed
9 + boost

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
35.2 kg
Nettovægt
28.8 kg
Volumen
0.28 m³
Mål på emballage
Længde
980 mm
Højde
385 mm
Dybde
780 mm

FORBRUG OG TILSLUTNINGSMULIGHER

Maksimalt forbrug
7560 W
Spænding
220-240V
Frekvens
50-60Hz

DATABLAD MOTOR

Maksimal kapacitet
520 m³/h
I.E.C. 61591
Maksimalt støjniveau
69 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
620 Pa
Maksimal sugestyrke
150 W
ENERGIKLASSE
A++

falmec

SINTESI

01SINTESI-90 Bordemfang
Sintesi Black - 600 m3/h

Sortiment
Bordemhætte

EAN Kode
8034122900278





Side view









falmec

SINTESI

01SINTESI-90 Bordemfang
Sintesi Black - 600 m3/h

Sortiment
Bordemhætte

EAN Kode
8034122900278

DATABLAD MOTOR

Motorhastighed	1	5	9	10
Støjniveau dB(A)re1pW- I.E.C.60704-2-13	48	-	66	69
Kapacitet (m3/h) I.E.C.61591	260	395	480	520
Maksimalt tryk (Pa)	85	240	460	620
Forbrug (W)	13	41	99	150
Luftudtag	220x90	220x90	220x90	220x90

KAPACITET / TRYK

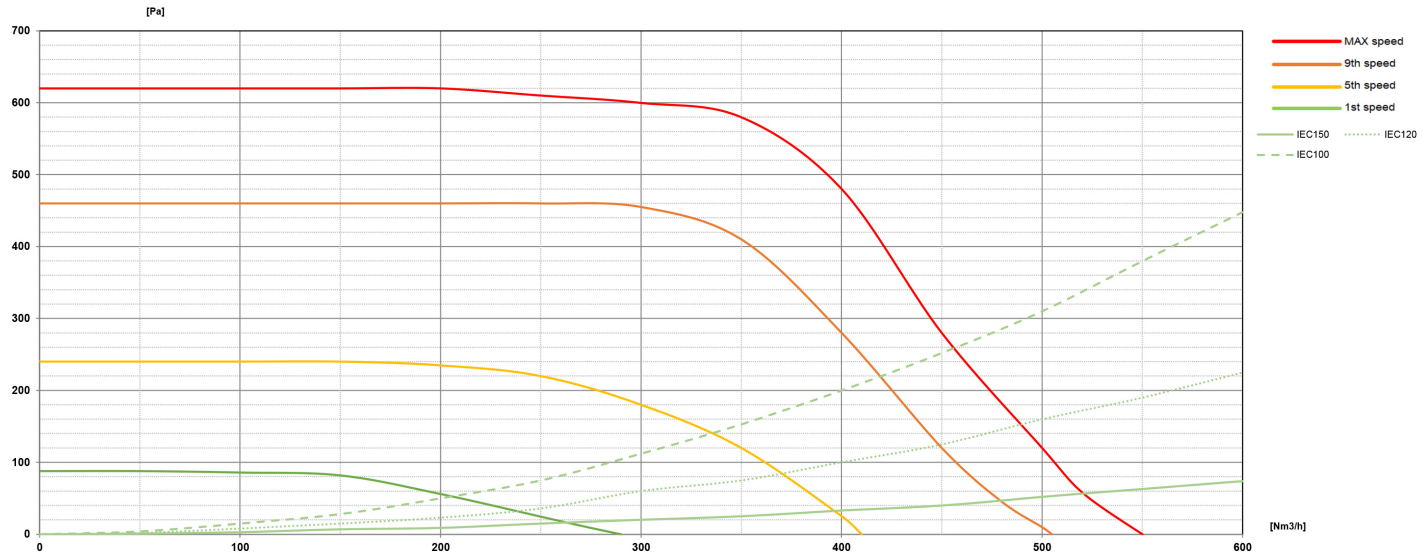

falmec

SINTESI

01SINTESI-90 Bordemfang
Sintesi Black - 600 m3/h

Sortiment
Bordemhætte

EAN Kode
8034122900278

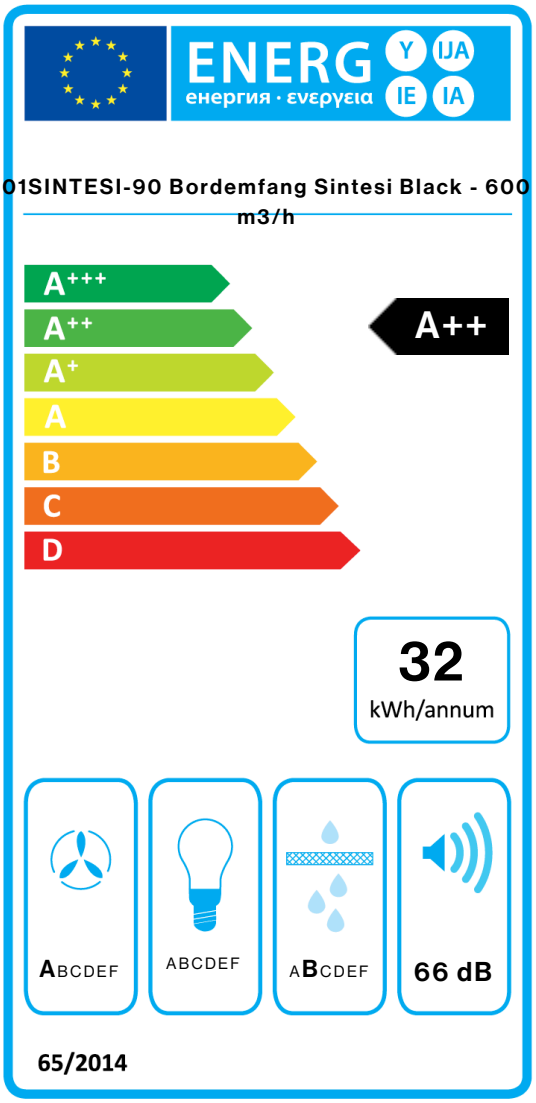

PF		
S	Falmec Spa	
M	01SINTESI-90 Bordemfang Sintesi Black - 600 m3/h	
AEC	31,5	kWh/a
EEC	A++	
FDE	37,7	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	260,0	m³/h
Qmax	480,0	m³/h
Qboost	520,0	m³/h
SPEmin	48	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.6	
EEI	33,3	
Qbep	312,0	m³/h
Pbep	627	Pa
Qboost	520,0	m³/h
Wbep	144,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.