

## SINTESI

01SINTESI-90 Bordemfang  
Sintesi Black - 600 m<sup>3</sup>/h

### Sortiment

Bordemhætte

### EAN Kode

8034122900278



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

4 kogezone med aut.  
grydegenkendelse  
Restvarme indikator  
Hold varm funktion  
9 varmetrin + powerfunktion  
(Dobble boost)  
Automatisk gryde sensor  
Timer. Minutur  
Børnesikring  
Pause og genkald  
Flex zone  
Dobbelt brofunktion  
Automatisk sluk-timer  
Power management system på 3  
trin: 2.8 kw, 3.5 kw, 7.4 kw  
Børsteløs motor  
Touch glidekontrol med rødt  
LED-display  
Advarsel for vedligeholdelse af  
fedtfiltere  
Induktion

## TEKNISK BESKRIVELSE

**Installation**  
Kogeplade  
**Dimensioner**  
88 cm  
**Materiale**  
Sort Schott glas  
Black stainless steel frame  
**Motor**  
600 m<sup>3</sup>/h  
**Betjening**  
Betjening med touch  
**Hastighed**  
9 + boost

## EMBALLAGE: VÆGT OG VOLUMEN

**Bruttovægt**  
35.2 kg  
**Nettovægt**  
28.8 kg  
**Volumen**  
0.28 m<sup>3</sup>  
**Mål på emballage**  
Længde  
980 mm  
Højde  
385 mm  
Dybde  
780 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

**Maksimalt forbrug**  
7560 W  
**Spænding**  
220-240V  
**Frekvens**  
50-60Hz

## DATABLAD MOTOR

**Maksimal kapacitet**  
520 m<sup>3</sup>/h  
I.E.C. 61591  
**Maksimalt støjniveau**  
69 dB(A)re1pW  
I.E.C.60704-2-13  
**Maksimalt tryk (Pa)**  
620 Pa  
**Maksimal sugestyrke**  
150 W  
**ENERGIKLASSE**  
A++

## MULIGHEDER FOR TILVALG

### KACL.930

Kit kul / zeolitfilter

### KACL.931

Kit. Løst kul / zeolitfilter

### KACL.951

Underbase Slim filter unit  
(h60mm)

### KACL.952

Filter replacement (underbase  
Slim filter unit - h60mm)

### KACL.955

Base grid (underbase Slim filter  
unit - h60mm)

## SINTESI



01SINTESI-90 Bordemfang  
Sintesi Black - 600 m3/h

## Sortiment




Bordemhætte

## EAN Kode

8034122900278



Side view



## SINTESI

01SINTESI-90 Bordemfang  
Sintesi Black - 600 m<sup>3</sup>/h

### Sortiment

Bordemhætte


### EAN Kode

8034122900278

## DATABLAD MOTOR

Motorhastighed	1	5	9	10
Støjniveau dB(A) <sub>re1pW</sub> - I.E.C.60704-2-13	48	-	66	69
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	260	395	480	520
Maksimalt tryk (Pa)	85	240	460	620
Forbrug (W)	13	41	99	150
Luftudtag	220x90	220x90	220x90	220x90

## KAPACITET / TRYK

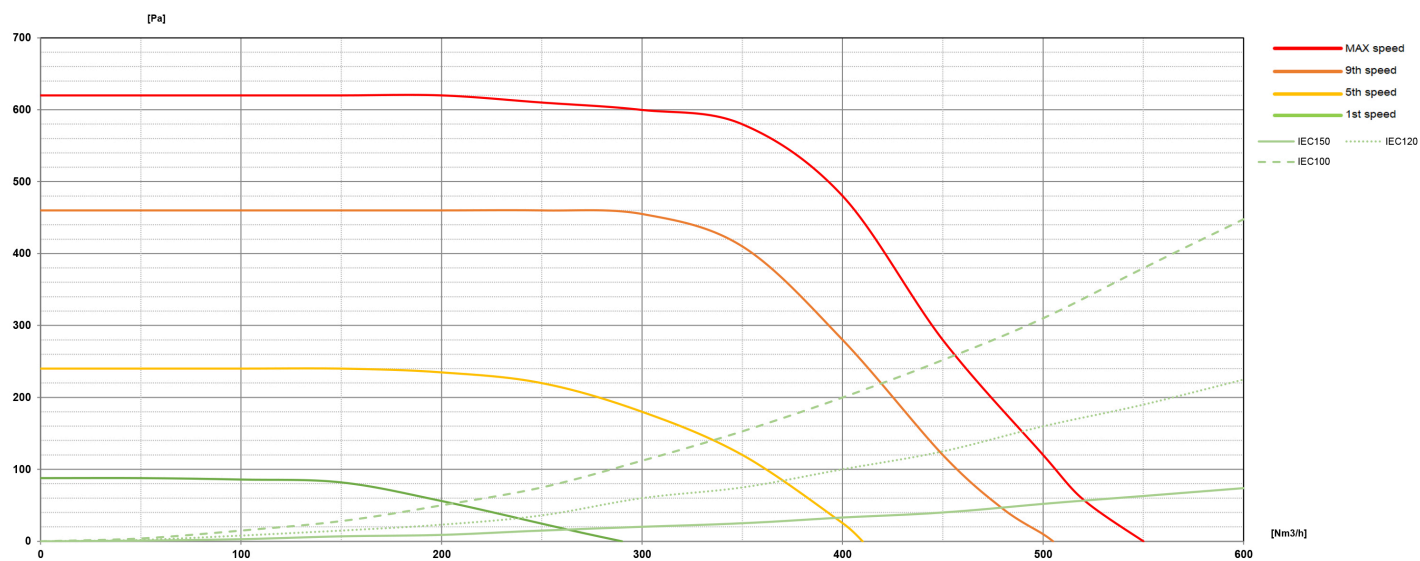

## SINTESI


01SINTESI-90 Bordemfang  
Sintesi Black - 600 m<sup>3</sup>/h

## Sortiment

Bordemhætte

## EAN Kode

8034122900278

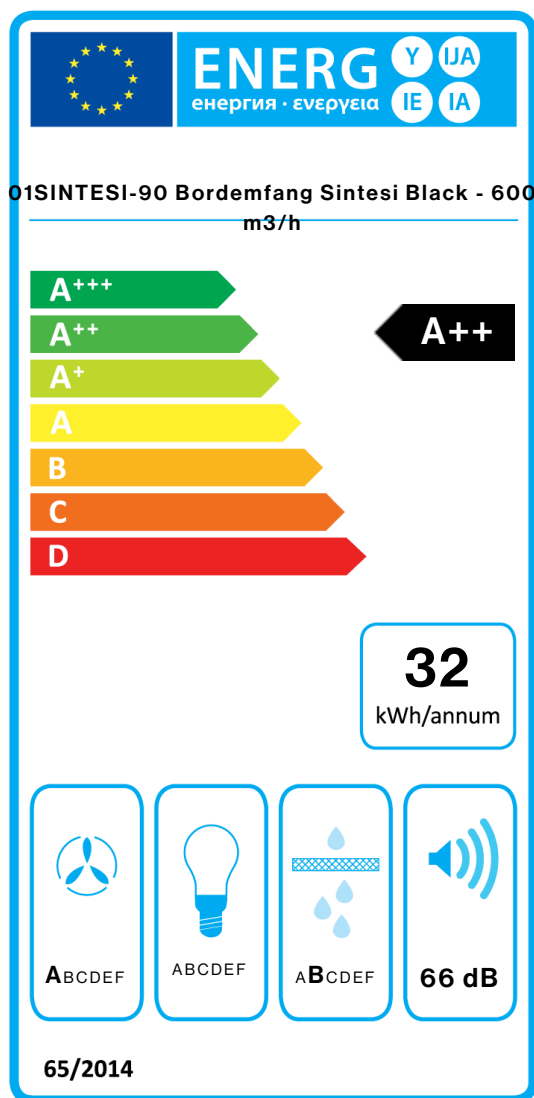

PF		
<b>S</b>	Falmec Spa	
<b>M</b>	01SINTESI-90 Bordemfang Sintesi Black - 600 m <sup>3</sup> /h	
<b>AEC</b>	31,5	kWh/a
<b>EEC</b>	A++	
<b>FDE</b>	37,7	
<b>FDEC</b>	A	
<b>LE</b>	0,0	
<b>LEC</b>		
<b>GFE</b>	87,0	
<b>GFEC</b>	B	
<b>Qmin</b>	260,0	m <sup>3</sup> /h
<b>Qmax</b>	480,0	m <sup>3</sup> /h
<b>Qboost</b>	520,0	m <sup>3</sup> /h
<b>SPEmin</b>	48	dBa
<b>SPEmax</b>	66	dBa
<b>SPEboost</b>	69	dBa
<b>PO</b>	-	W
<b>PS</b>	0,48	W
PI		
<b>F</b>	0.6	
<b>EEI</b>	33,3	
<b>Qbep</b>	312,0	m <sup>3</sup> /h
<b>Pbep</b>	627	Pa
<b>Qboost</b>	520,0	m <sup>3</sup> /h
<b>Wbep</b>	144,0	W
<b>WL</b>	0,00	W
<b>Emiddle</b>	0	lux
<b>Lwa-SPEmax</b>	66	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.