

## BRIDGE

Indbyg skab - 85 cm - Sort -  
950 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122612263



*Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model*

## FUNKTIONER

## TEKNISK BESKRIVELSE

### Installation

Væg

### Dimensioner

85 cm

### Materiale

Sortlakeret stål

### Motor

1000 m<sup>3</sup>/h

### Betjening

Elektronisk kontrolpanel

### Belysning

LED

### Minimumsafstand

Gaskomfur: 60 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

22.8 kg

### Nettovægt

18.7 kg

### Volumen

0.24 m<sup>3</sup>

### Mål på emballage

Længde

950 mm

Højde

380 mm

Dybde

655 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

320 W

### Spænding

220-240V


### Frekvens

50-60Hz

Shuko

### ENERGIKLASSE

B



## BRIDGE


Indbyg skab - 85 cm - Sort -  
950 m<sup>3</sup>/h

### Sortiment

Design

### EAN Kode

8034122612263

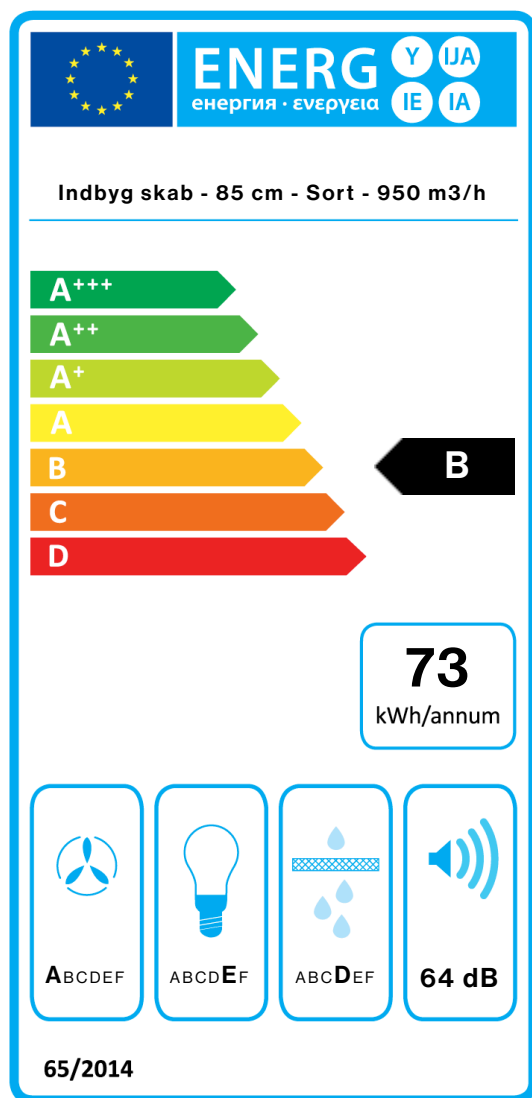

PF		
S	Falmec Spa	
M	Indbyg skab - 85 cm - Sort - 950 m <sup>3</sup> /h	
AEC	73,4	kWh/a
EEC	B	
FDE	29,5	
FDEC	A	
LE	11,9	
LEC	E	
GFE	65,1	
GFEC	D	
Qmin	360,0	m <sup>3</sup> /h
Qmax	630,0	m <sup>3</sup> /h
Qboost	830,0	m <sup>3</sup> /h
SPEmin	50	dBa
SPEmax	64	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEI	58,7	
Qbep	441,0	m <sup>3</sup> /h
Pbep	434	Pa
Qboost	830,0	m <sup>3</sup> /h
Wbep	180,0	W
WL	19,50	W
Emiddle	232	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.