

VIRGOLA NO-DROP

Version

Built-in - 90 cm - 800 m³/h

Collection

Design

EAN code

8034122361420



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Tempered turning glass
Electronic control
Metallic grease filter,
removable and washable
Optional charcoal filter
Optional Chimney
Dynamic LED Light (2700K -
5600K)
No-Drop patented anti-
condensation system

Availability Carbon.Zeo filter
KACL.961 for hoods produced
from 12/01/2020

OPTIONAL ACCESSORIES

KACL.107

Glass shelf 90 cm

KACL.954

Cellular charcoal filter (for
Virgola No-Drop hoods
<08/06/2020)

KACL.960

Charcoal filter

KCVJN.00#3

Telescopic chimney h 185 + h 185

KCVJN.01#3

Chimney h 120 mm

TECHNICAL FEATURES

Installation type

Built-in

Dimensions

90 cm

Finishing

Scotch brite stainless steel

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 2x1,2 W - 2700 K / 5600 K

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

17.6 kg

Net weight

13.8 kg

Volumes

0.19 m³

Packaging size

Length

995 mm

Height

410 mm

Depth

465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency

50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity

670 m³/h

I.E.C. 61591

Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)



500 Pa

Max. motor power

215 W

ENERGY CLASS

B



VIRGOLA NO-DROP

Version

Built-in - 90 cm - 800 m³/h

Collection

Design

EAN code

8034122361420

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 | 4 |
|--|-----|-----|-----|-----|
| Noise level dB(A) _{re1pW-I.E.C.60704-2-13} | 49 | 55 | 61 | 67 |
| Capacity (m ³ /h) I.E.C.61591 | 270 | 360 | 470 | 670 |
| Maximum pressure (Pa) | 390 | 420 | 460 | 500 |
| Motor Power (W) | 134 | 156 | 180 | 215 |
| Air outlet | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE



VIRGOLA NO-DROP

Version

Built-in - 90 cm - 800 m3/h


Collection

Design

EAN code

8034122361420

ENERGY LABEL

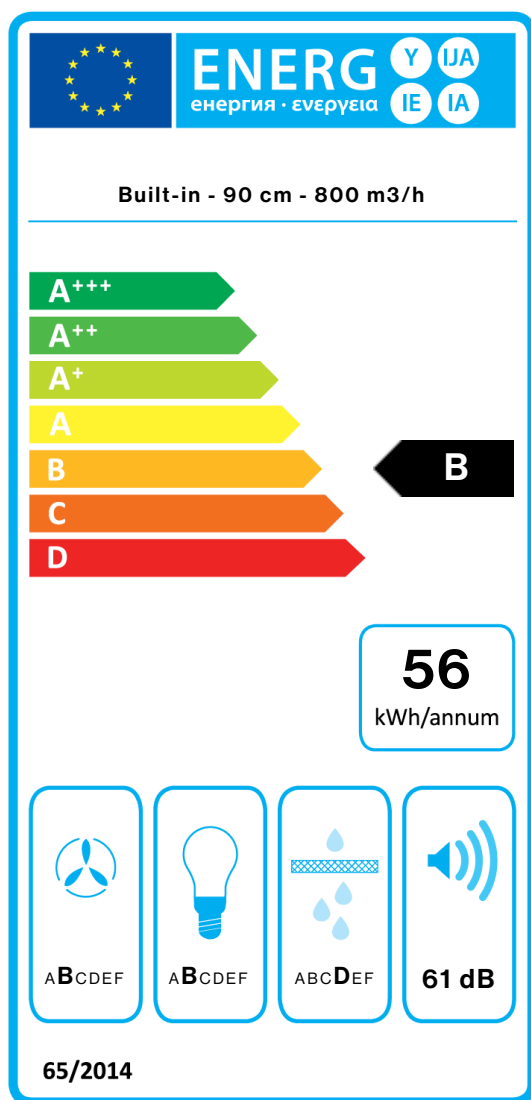

| PF | | |
|------------|-----------------------------|-------------------|
| S | Falmec Spa | |
| M | Built-in - 90 cm - 800 m3/h | |
| AEC | 55,7 | kWh/a |
| EEC | B | |
| FDE | 26,4 | |
| FDEC | B | |
| LE | 27,9 | |
| LEC | B | |
| GFE | 70,0 | |
| GFEC | D | |
| Qmin | 250,0 | m ³ /h |
| Qmax | 480,0 | m ³ /h |
| Qboost | 620,0 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 61 | dBa |
| SPEboost | 66 | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1 | |
| EEL | 57,8 | |
| Qbep | 364,0 | m ³ /h |
| Pbep | 371 | Pa |
| Qboost | 620,0 | m ³ /h |
| Wbep | 142,0 | W |
| WL | 5,30 | W |
| Emiddle | 148 | lex |
| Lwa-SPEmax | 61 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.