

## VIRGOLA BLACK NO-DROP

### Version

Built-in - 90 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122361437



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Tempered turning glass  
Electronic control  
Optional charcoal filter  
Optional Chimney  
Dynamic LED Light (2700K - 5600K)  
Anti-condensation no-drop filter in technopolymer

Availability Carbon.Zeo filter  
KACL.961 for hoods produced from 12/01/2020

## OPTIONAL ACCESSORIES

### KACL.107

Glass shelf 90 cm

### KACL.954

Cellular charcoal filter (for Virgola No-Drop hoods <08/06/2020)

### KACL.960

Charcoal filter

## TECHNICAL FEATURES

### Installation type

Built-in

### Dimensions

90 cm

### Finishing

Painted black steel

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 2700 K / 5600 K

### Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

17.6 kg

### Net weight

13.8 kg

### Volumes

0.19 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

410 mm

Depth

465 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

## MOTOR TECHNICAL SHEET

### Maximum capacity

670 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)



500 Pa

### Max. motor power

215 W

## ENERGY CLASS

B



## VIRGOLA BLACK NO-DROP

### Version

Built-in - 90 cm - 800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122361437

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	55	61	67
Capacity (m <sup>3</sup> /h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

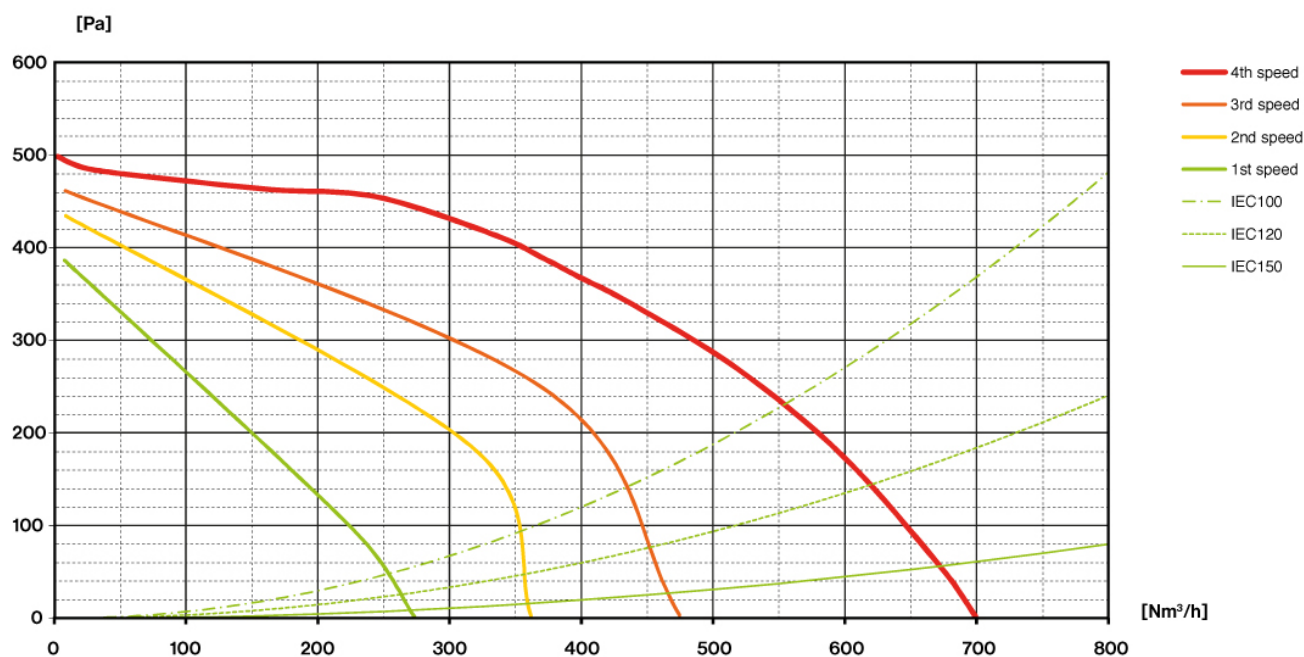

## VIRGOLA BLACK NO-DROP

### Version

Built-in - 90 cm - 800 m3/h


### Collection

Design

### EAN code

8034122361437

## ENERGY LABEL

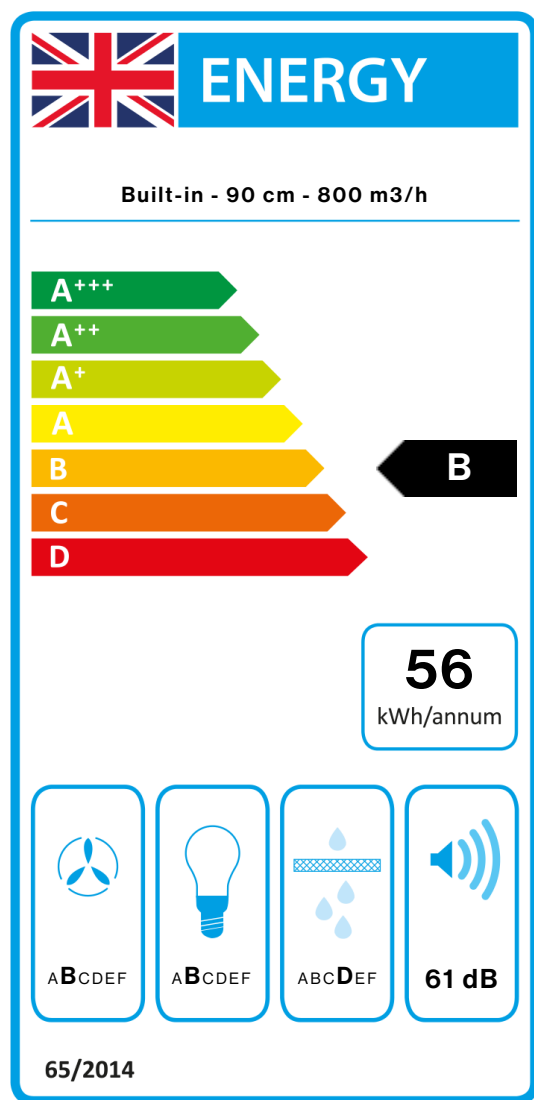

PF		
S	Falmec Spa	
M	Built-in - 90 cm - 800 m3/h	
AEC	55,7	kWh/a
EEC	B	
FDE	26,4	
FDEC	B	
LE	27,9	
LEC	B	
GFE	70,0	
GFEC	D	
Qmin	250,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	620,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	57,8	
Qbep	364,0	m <sup>3</sup> /h
Pbep	371	Pa
Qboost	620,0	m <sup>3</sup> /h
Wbep	142,0	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.