

VIRGOLA BLACK NO-DROP

Version
Built-in - 90 cm - 800 m3/h

Collection
Design

EAN code
8034122361437



The photograph is purely for information
It may not correspond to the selected version.


FEATURES

- Glass panel
- Electronic control
- Optional charcoal filter
- Optional Chimney
- Dynamic LED Light (2700K - 5600K)
- No-Drop System anti-condensation patented technology
- Anti-condensation no-drop filter in technopolymer

Availability Carbon.Zeo filter
KACL.961 for hoods produced
from 12/01/2020


OPTIONAL ACCESSORIES

- KACL.107**
Glass shelf 90 cm
- KACL.954**
Cellular charcoal filter (for
Virgola No-Drop hoods
<08/06/2020)
- KACL.960**
Charcoal filter
- KCVJN.00#3**
Telescopic chimney h 185 + h 185
- KCVJN.01#3**
Chimney h 120 mm



TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
90 cm
- Finishing**
Painted black steel
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 2x1,2 W - 2700 K / 5600 K
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm



PACKAGING:WEIGHTS AND
VOLUMES

- Gross weight**
17.6 kg
- Net weight**
13.8 kg
- Volumes**
0.19 m³
- Packaging size**
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND
CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
670 m³/h
I.E.C. 61591
- Maximum noise level**
67 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
500 Pa
- Max. motor power**
215 W
- ENERGY CLASS**
B

VIRGOLA BLACK NO-DROP

Version
Built-in - 90 cm - 800 m3/h


Collection
Design

EAN code
8034122361437

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

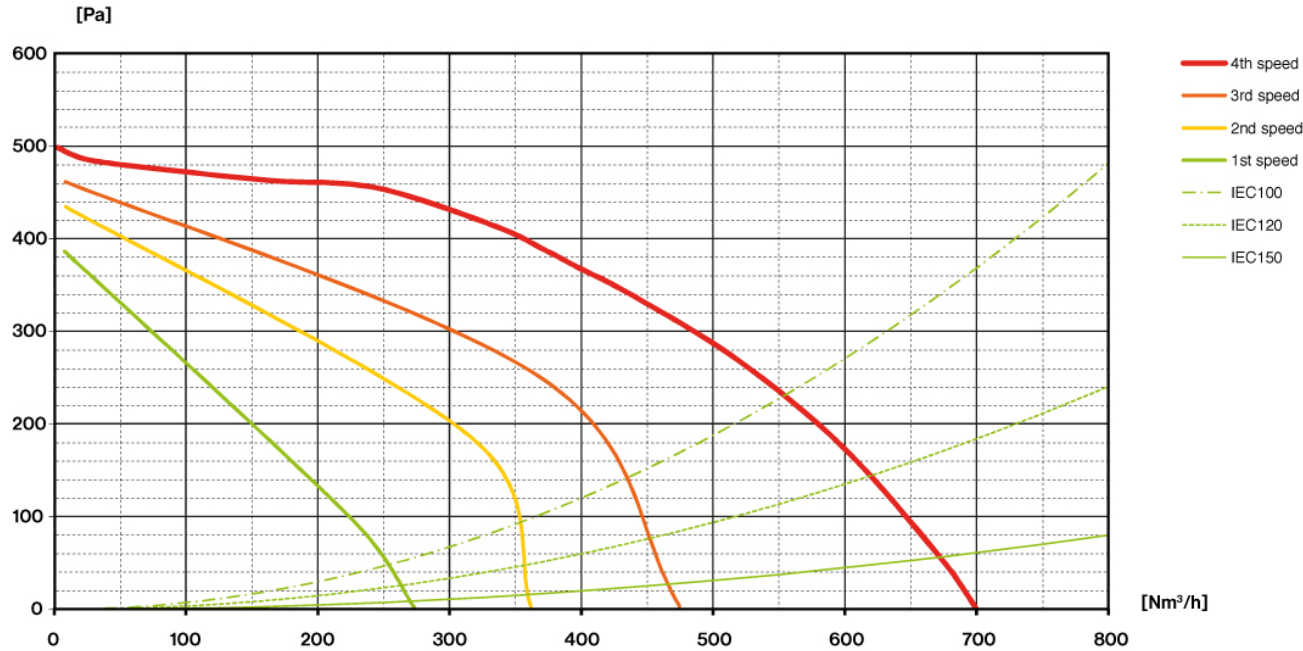


VIRGOLA BLACK NO-DROP

Version
Built-in - 90 cm - 800 m3/h

Collection
Design

EAN code
8034122361437

ENERGY LABEL

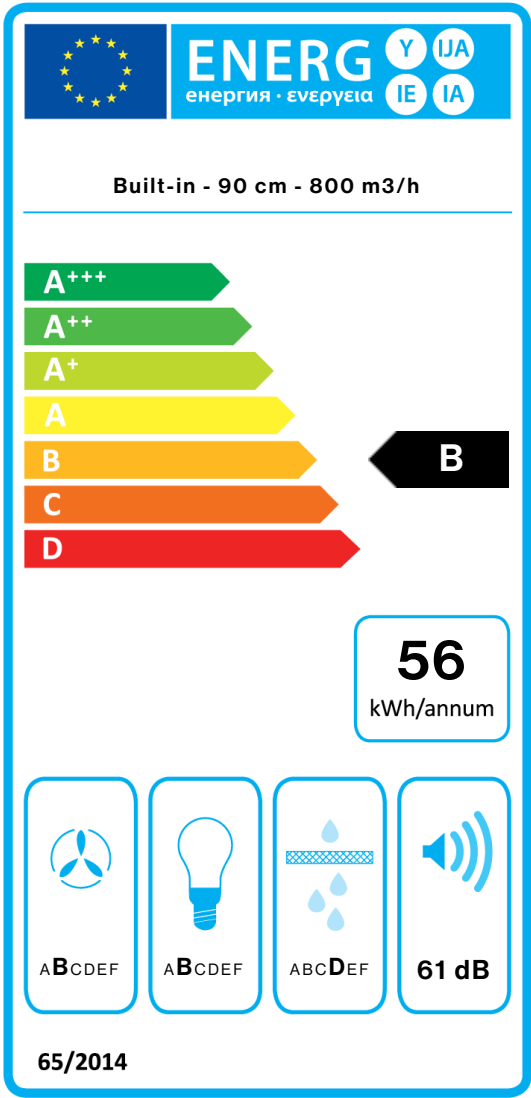

PF		
S	Falmec Spa	
M	Built-in - 90 cm - 800 m3/h	
AEC	55,7	kWh/a
EEC	B	
FDE	26,4	
FDEC	B	
LE	27,9	
LEC	B	
GFE	70,0	
GFEC	D	
Qmin	250,0	m³/h
Qmax	480,0	m³/h
Qboost	620,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	57,8	
Qbep	364,0	m³/h
Pbep	371	Pa
Qboost	620,0	m³/h
Wbep	142,0	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.