

## PRISMA

### Version

FDPRI36W5SW wall 36"/85 cm  
- 500CFM - Stainless and  
White Glass

### Collection

Design+

### EAN code

8034122359120



Photograph is for information purposes only  
May not correspond to the selected version

## FEATURES

Touch control + 24 h function  
LED ambient light  
LED lighting  
Top filter, removable and washable  
Combined regenerable  
Carbon.Zeo filter (optional)  
Charcoal filter  
Possible to duct wall mounted from rear  
Optional Chimney

## OPTIONAL ACCESSORIES

### FDNUVMTR600

FDNUVMTR600 - Motor 600 CFM for North America

### FFCHAR3COBL

FFCHAR3COBL - Round charcoal filter Ø 6' - Type 6

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

### KCQAN.00#I

Chimney (Inox)

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

36 / 85 cm

### Finish

White tempered glass

### Motor

500 CFM

### Type of control

Touch control

### Speed

4

### Lighting

Led 2x1,2 W - 3200 K

### Ambient lighting

Led 2x1,2 W - 3200 K

Metallic filter

### Filter

2 x Metallic filter "Top" - 196x258 mm

### Charcoal filter

FFCHAR3COBL - Round charcoal filter Ø 6' - Type 6 (optional)

### Minimum distance

Gas hob: 21 in

Electric hob: 21 in

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

60 lbs

### Net weight

49 lbs

### Volumes

11 ft<sup>3</sup>

### Packaging size

Length

40 in

Height

21 in

Depth

24 in

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

## MOTOR TECHNICAL SHEET

### Maximum capacity

750 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

66 dB(A)re1pW




I.E.C.60704-2-13

### Maximum pressure (Pa)

510 Pa

### Max. motor power

224 W

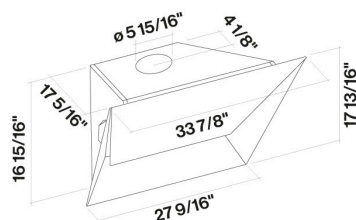

## PRISMA

### Version

FDPRI36W5SW wall 36"/85 cm  
- 500CFM - Stainless and  
White Glass

### Collection

Design+

### EAN code

8034122359120

## MOTOR TECHNICAL SHEET

Motor Speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	46	53	58	66
Capacity (m3/h) I.E.C.61591	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

