

VIRGOLA PLUS - NORTH AMERICA

Version
Built-in 75 cm - 600 m3/h

Collection
Design

EAN code
8034122360621



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Electronic control
- Metallic grease filter, removable and washable
- Charcoal filter included
- Dynamic LED Light (2700K - 5600K)

OPTIONAL ACCESSORIES

- 103050107
- Square charcoal filter - Type 3

TECHNICAL FEATURES

- Installation type
Built-in
- Dimensions
75 cm
- Finishing
Tempered turning glass
Scotch brite stainless steel
- Motor
600 m³/h
- Type of control
Electronic control
- Speed settings
3
- Lighting
Led 2x1,2 W - 3200 K
- Filter
2 x Metallic filter "Base" - 245x207 mm
- Charcoal filter
Square charcoal filter - Type 3 (included)
- Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight
14.2 kg
- Net weight
10.5 kg
- Volumes
0.19 m³
- Packaging size
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
230 W
- Voltage
220-240V
- Frequency
50-60Hz
- Plug type
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity
480 m³/h
- I.E.C. 61591
- Maximum noise level
65 dB(A)re1pW
- I.E.C.60704-2-13
- Maximum pressure (Pa)
500 Pa
- Max. motor power
180 W
- ENERGY CLASS
C



VIRGOLA PLUS - NORTH AMERICA

Version
Built-in 75 cm - 600 m3/h


Collection
Design

EAN code
8034122360621

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

CAPACITY / PRESSURE

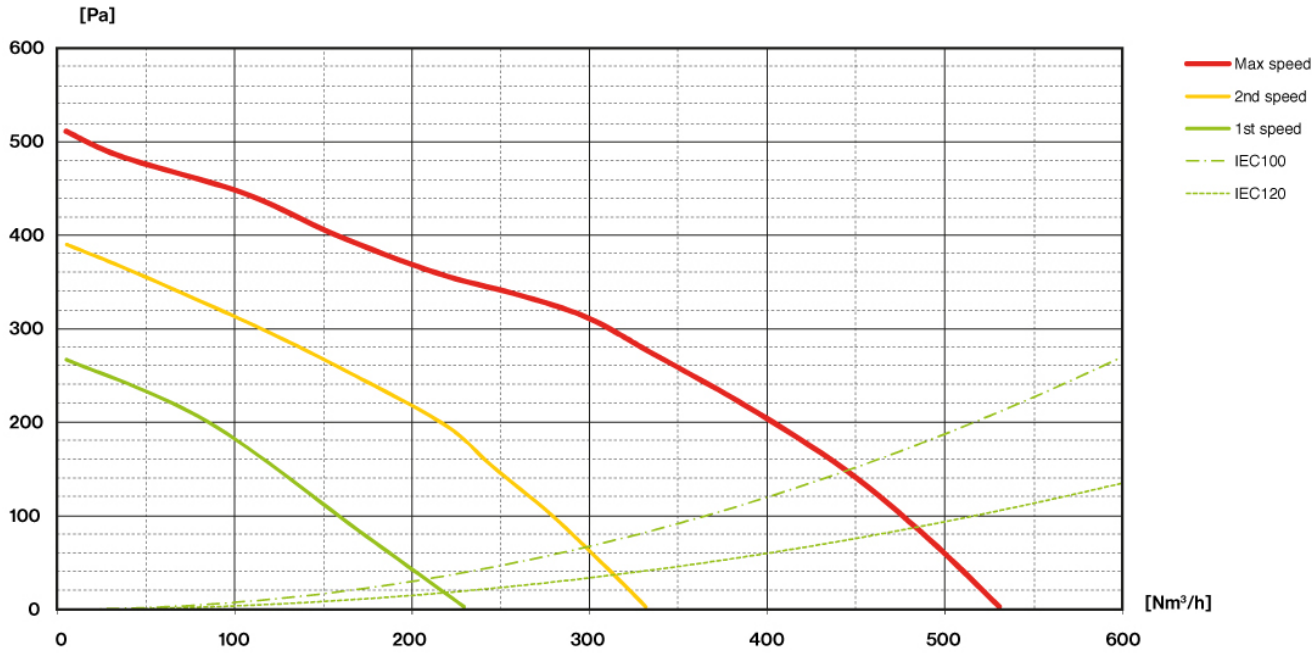


VIRGOLA PLUS - NORTH
AMERICA

Version
Built-in 75 cm - 600 m3/h

Collection
Design

EAN code
8034122360621

ENERGY LABEL

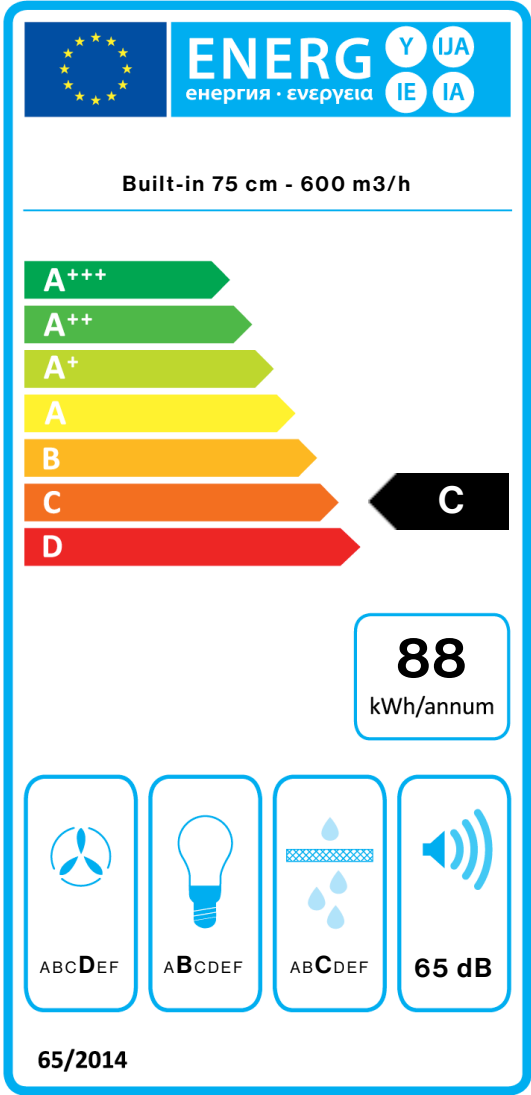

PF		
S	Falmec Spa	
M	Built-in 75 cm - 600 m3/h	
AEC	87,7	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	27,9	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	480,0	m³/h
Qboost	480,0	m³/h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEL	80,9	
Qbep	303,0	m³/h
Pbep	308	Pa
Qboost	480,0	m³/h
Wbep	164,0	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.