

GRUPPO INCASSO NO-DROP

Version

Gruppo Incasso No-Drop 90
cm - 800 m³/h

Collection

Design

EAN code

8034122362281

FEATURES

**Scotch brite stainless steel
(AISI 304)**

Electronic control

Optional charcoal filter

Optional remote control

Oil collector

**Dynamic LED Light (2700K -
5600K)**

**No-Drop patented anti-
condensation system**

OPTIONAL ACCESSORIES

KACL.770#41F

Remote under-roof 1100 m³/h
Brushless

KACL.782#49F

Slim motor 800 m³/h

KACL.786#41F

Outdoor extractor fan 1000
m³/h

KACL.796#4AF

Outdoor extractor fan 1500 m³/h

KACL.797#4AF

Remote under-roof motor 1300
m³/h

103050091

Round charcoal filter Ø170 mm -
Type 6

TECHNICAL FEATURES

Installation type

Built-in

Dimensions

90 cm

Finishing

Scotch brite stainless steel (AISI
304)

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x1,2 W - 2700 K / 5600 K

Charcoal filter

Round charcoal filter Ø170 mm -
Type 6 (included)

Minimum distance

Gas hob: 62 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

15.4 kg

Net weight

11.9 kg

Volumes

0.15 m³

Packaging size

Length

915 mm

Height

370 mm

Depth

455 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency


50-60Hz

Plug type

Shuko

ENERGY CLASS

B



GRUPPO INCASSO NO-DROP

Version

Gruppo Incasso No-Drop 90
cm - 800 m3/h


Collection

Design

EAN code

8034122362281

ENERGY LABEL

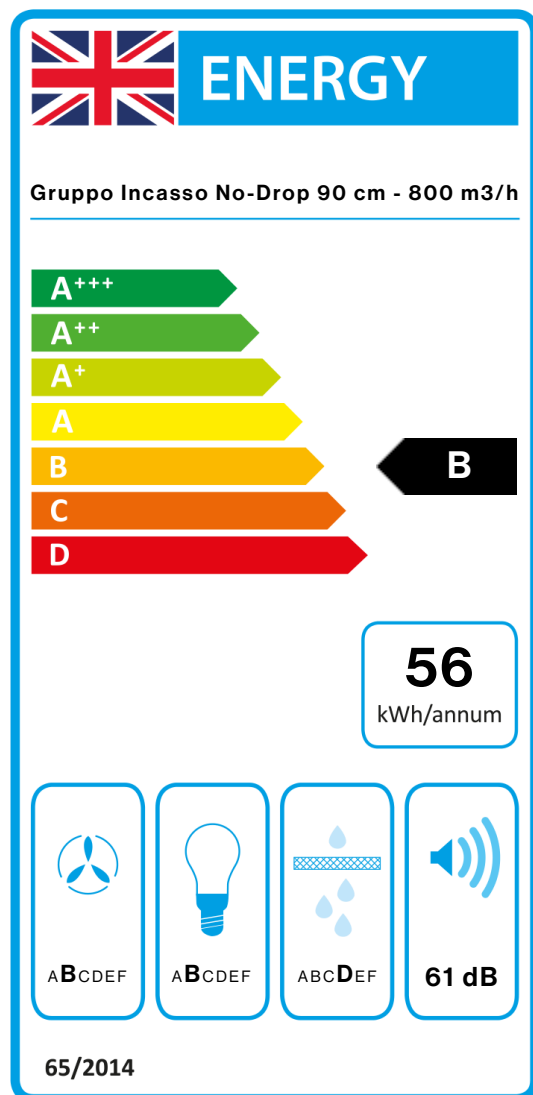

PF		
S	Falmec Spa	
M	Gruppo Incasso No-Drop 90 cm - 800 m3/h	
AEC	55,7	kWh/a
EEC	B	
FDE	26,4	
FDEC	B	
LE	27,9	
LEC	B	
GFE	70,0	
GFEC	D	
Qmin	250,0	m³/h
Qmax	480,0	m³/h
Qboost	620,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	57,8	
Qbep	364,0	m³/h
Pbep	371	Pa
Qboost	620,0	m³/h
Wbep	142,0	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.