

GHOST

Version

Wall 60 cm - Black - 600 m³/h

Collection

Design+

EAN code

8034122345994



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Frontal door with automatic opening system
Touch control + 24 h function
LED ambient light
LED lighting
Top filter, removable and washable
Charcoal filter included

OPTIONAL ACCESSORIES

KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

105080053

Remote control

TECHNICAL FEATURES

Installation type

Wall

Dimensions

60 cm

Finishing

Scotch brite stainless steel (AISI 304)

Black tempered glass finishing

Motor

600 m³/h

Type of control

Touch control

Speed settings

3

Lighting

Led stripe 4 W - 5500 K

Ambient lighting

Ambient led 2x5 W - 5500 K

Filter

2 x Metallic filter "Top" - 235x306 mm

Charcoal filter

Charcoal filter Ghost (2x) (included)

Minimum distance

Gas hob: 55 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

38 kg

Net weight

32 kg

Volumes

0.26 m³

Packaging size

Length

1330 mm

Height

265 mm

Depth

725 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

230 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

450 m³/h

I.E.C. 61591

Maximum noise level

62 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


450 Pa

Max. motor power

180 W

ENERGY CLASS

C

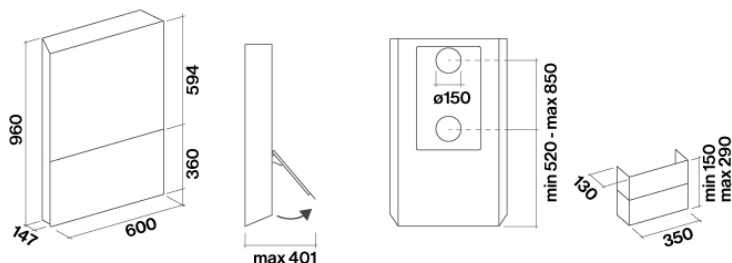

GHOST

Version

Wall 60 cm - Black - 600 m³/h

Collection

Design+


EAN code

8034122345994

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW- I.E.C.60704-2-13	51	56	62
Capacity (m ³ /h) I.E.C.61591	250	320	450
Maximum pressure (Pa)	380	420	450
Motor Power (W)	145	165	180
Air outlet	220x90 rect	220x90 rect	220x90 rect

CAPACITY / PRESSURE

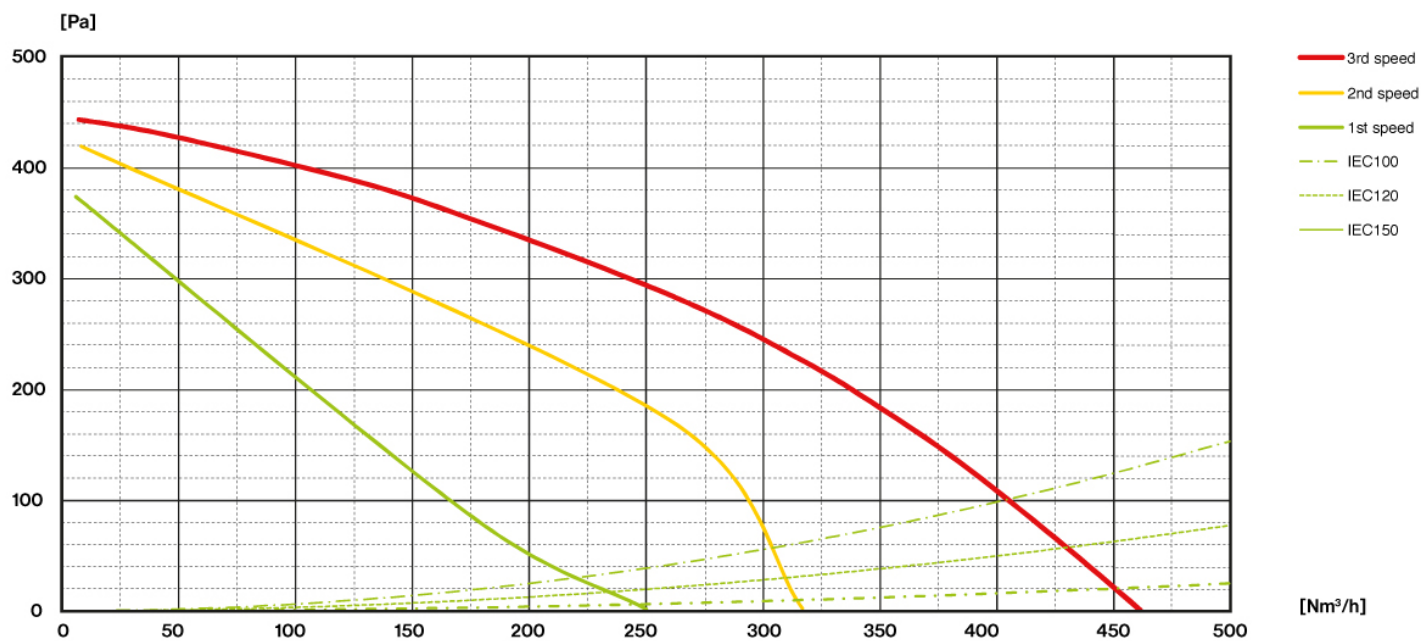

GHOST

Version

Wall 60 cm - Black - 600 m³/h


Collection

Design+

EAN code

8034122345994

ENERGY LABEL

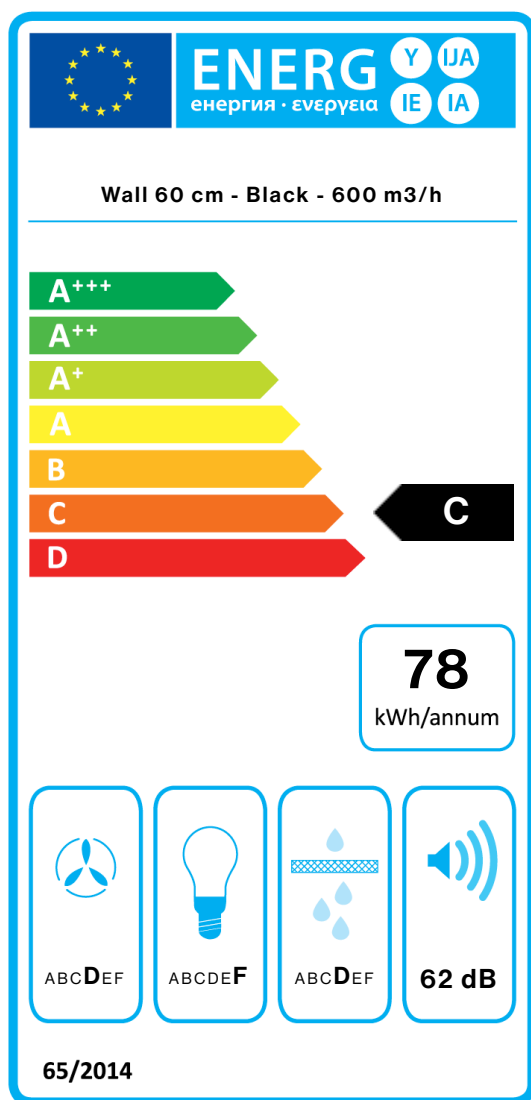

PF		
S	Falmec Spa	
M	Wall 60 cm - Black - 600 m ³ /h	
AEC	77,9	kWh/a
EEC	C	
FDE	15,4	
FDEC	D	
LE	5,0	
LEC	F	
GFE	73,0	
GFEC	D	
Qmin	250,0	m ³ /h
Qmax	450,0	m ³ /h
Qboost	450,0	m ³ /h
SPEmin	51	dBa
SPEmax	62	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEL	82,1	
Qbep	225,0	m ³ /h
Pbep	312	Pa
Qboost	450,0	m ³ /h
Wbep	127,0	W
WL	17,80	W
Emiddle	89	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.