

GHOST

Version
Wall 60 cm - Black - 600 m3/h

Collection
Design+

EAN code
8034122345994



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Frontal door with automatic opening system
- Touch control + 24 h function
- LED ambient light
- LED lighting
- Top filter, removable and washable
- Charcoal filter included

OPTIONAL ACCESSORIES

- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- 105080053**
Remote control

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
60 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Black tempered glass finishing
- Motor**
600 m³/h
- Type of control**
Touch control
- Speed settings**
3
- Lighting**
Led stripe 4 W - 5500 K
- Ambient lighting**
Ambient led 2x5 W - 5500 K
- Filter**
2 x Metallic filter "Top" - 235x306 mm
- Charcoal filter**
Charcoal filter Ghost (2x) (included)
- Minimum distance**
Gas hob: 55 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight**
38 kg
- Net weight**
32 kg
- Volumes**
0.26 m³
- Packaging size**
Length
1330 mm
Height
265 mm
Depth
725 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
230 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
450 m³/h
- I.E.C. 61591
- Maximum noise level**
62 dB(A)re1pW
- I.E.C.60704-2-13
- Maximum pressure (Pa)**
450 Pa
- Max. motor power**
180 W
- ENERGY CLASS**
C



GHOST

Version
Wall 60 cm - Black - 600 m3/h


Collection
Design+

EAN code
8034122345994

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW- I.E.C.60704-2-13	51	56	62
Capacity (m3/h) I.E.C.61591	250	320	450
Maximum pressure (Pa)	380	420	450
Motor Power (W)	145	165	180
Air outlet	220x90 rect	220x90 rect	220x90 rect

CAPACITY / PRESSURE

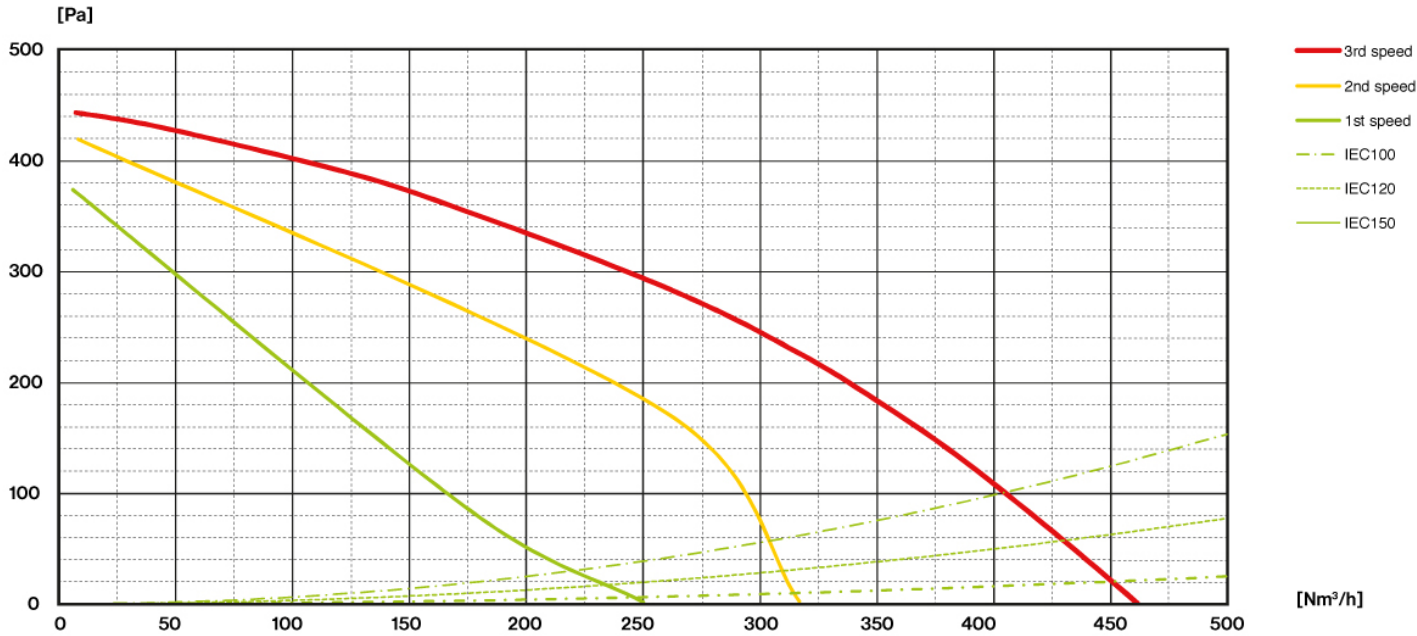


GHOST

Version
Wall 60 cm - Black - 600 m3/h

Collection
Design+

EAN code
8034122345994

ENERGY LABEL

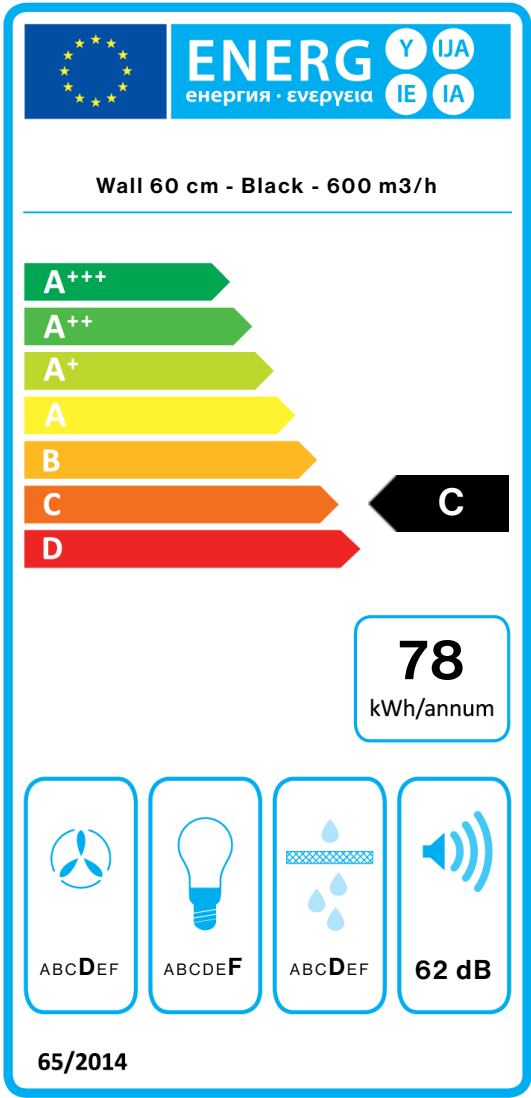

PF		
S	Falmec Spa	
M	Wall 60 cm - Black - 600 m3/h	
AEC	77,9	kWh/a
EEC	C	
FDE	15,4	
FDEC	D	
LE	5,0	
LEC	F	
GFE	73,0	
GFEC	D	
Qmin	250,0	m³/h
Qmax	450,0	m³/h
Qboost	450,0	m³/h
SPEmin	51	dBa
SPEmax	62	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEL	82,1	
Qbep	225,0	m³/h
Pbep	312	Pa
Qboost	450,0	m³/h
Wbep	127,0	W
WL	17,80	W
Emiddle	89	lex
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.