

MERCURIO EVO

Version
Mercurio EVO - 60 cm - 600 m3/h

Collection
Design

EAN code
8034122363134



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Electronic control
- LED lighting
- Metallic grease filter, removable and washable
- Optional charcoal filter

OPTIONAL ACCESSORIES

- KACL.510#I**
Extension H700 - Wall
- KACL.512#I**
Extension H960 - Wall
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)
- KACL.865**
Air flow conveyor for re-circulation version (Wall)
- 103050107**
Square charcoal filter - Type 3

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
60 cm
- Finishing**
Scotch brite stainless steel
- Motor**
600 m³/h
- Type of control**
Electronic control
- Speed settings**
3
- Lighting**
Led 2x1,2 W - 3200 K
- Charcoal filter**
Square charcoal filter - Type 3 (optional)
- Minimum distance**
Gas hob: 63 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
15.4 kg
- Net weight**
12 kg
- Volumes**
0.19 m³
- Packaging size**
Length
710 mm
Height
450 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
230 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Schuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
580 m³/h
I.E.C. 61591
- Maximum noise level**
65 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
480 Pa
- Max. motor power**
200 W
- ENERGY CLASS**
B



MERCURIO EVO

Version
Mercurio EVO - 60 cm - 600
m3/h


Collection
Design

EAN code
8034122363134

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	47	56	65
Capacity (m3/h) I.E.C.61591	240	350	580
Maximum pressure (Pa)	250	400	480
Motor Power (W)	130	160	200
Air outlet	150	150	150

CAPACITY / PRESSURE

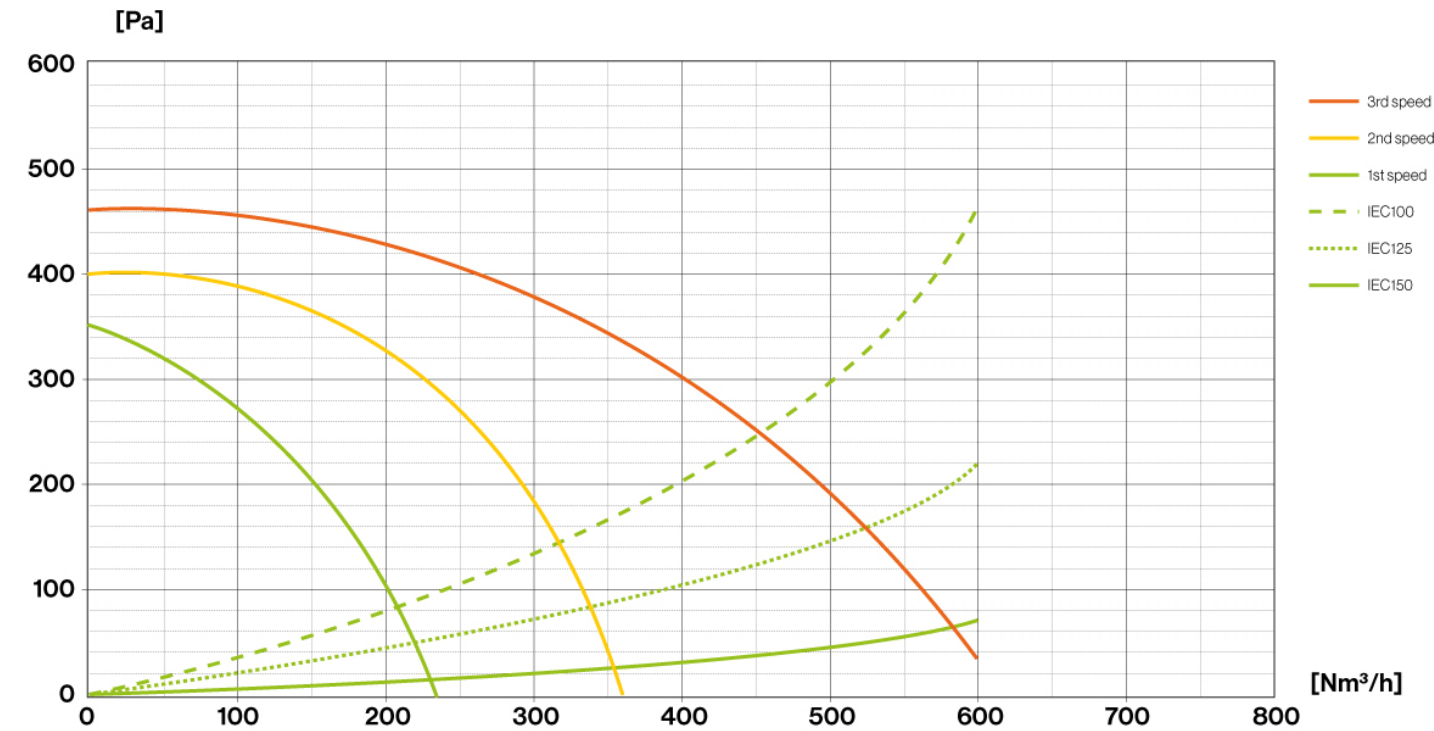


MERCURIO EVO

Version
Mercurio EVO - 60 cm - 600 m3/h

Collection
Design

EAN code
8034122363134

ENERGY LABEL

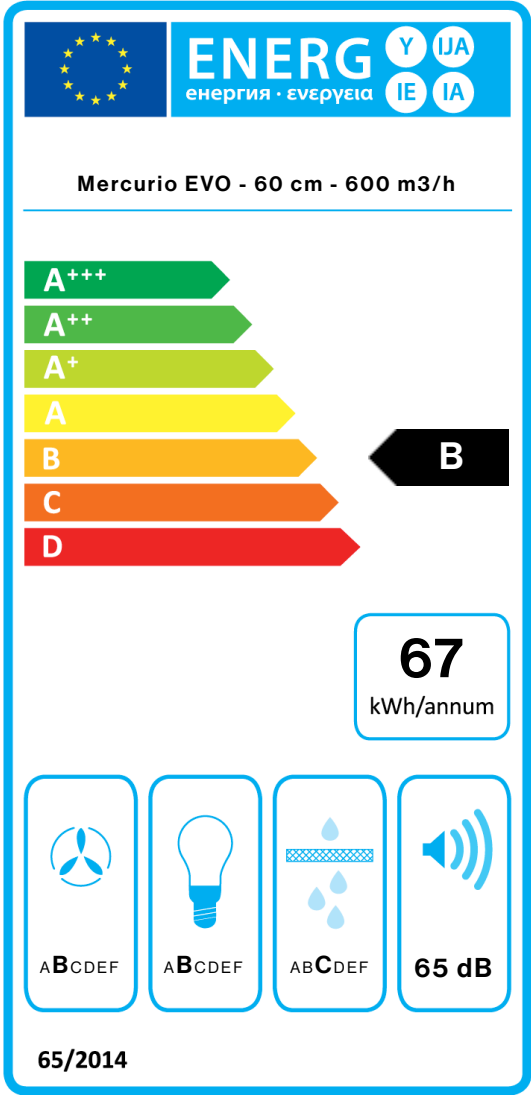

PF		
S	Falmec Spa	
M	Mercurio EVO - 60 cm - 600 m3/h	
AEC	67,4	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	27,9	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	240,0	m³/h
Qmax	580,0	m³/h
Qboost	580,0	m³/h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.2	
EEL	68,8	
Qbep	360,0	m³/h
Pbep	337	Pa
Qboost	580,0	m³/h
Wbep	145,0	W
WL	5,30	W
Emiddle	148	lex
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.