

## GINEVRA BOSTON

### Version

Wall 90 cm - Anthracite - 600 m<sup>3</sup>/h

### Collection

Classic

### EAN code

8034122409948



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

Slider  
LED lighting  
Metallic grease filter,  
removable and washable  
Charcoal filter included

## TECHNICAL FEATURES

**Installation type**  
Wall

**Dimensions**  
90 cm

**Finishing**  
Painted anthracite steel  
Copper-covered frontal edge

**Motor**  
600 m<sup>3</sup>/h

**Type of control**  
Slider

**Lighting**  
Incandescent 2x18 W

**Filter**  
2 x Metallic filter "Base" -  
235x245 mm

**Charcoal filter**  
Round charcoal filter Ø212 mm -  
Type 2 (included)

**Minimum distance**  
Gas hob: 65 cm  
Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**  
22 kg

**Net weight**  
18 kg

**Volumes**  
0.37 m<sup>3</sup>

**Packaging size**  
Length  
995 mm  
Height  
630 mm  
Depth  
595 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**  
230 W

**Voltage**  
220-240V

**Frequency**  
50-60Hz

**Plug type**  
Shuko

## MOTOR TECHNICAL SHEET


**Maximum capacity**  
480 m<sup>3</sup>/h  
I.E.C. 61591

**Maximum noise level**  
65 dB(A)re1pW  
I.E.C.60704-2-13

**Maximum pressure (Pa)**  
500 Pa

**Max. motor power**  
180 W

**ENERGY CLASS**  
C



## GINEVRA BOSTON

### Version

Wall 90 cm - Anthracite - 600  
m3/h

### Collection

Classic

### EAN code

8034122409948

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacity (m3/h) I.E.C.61591	220	320	480
Maximum pressure (Pa)	270	400	500
Motor Power (W)	100	130	180
Air outlet	120	120	120

## GINEVRA BOSTON

### Version

Wall 90 cm - Anthracite - 600 m3/h


### Collection

Classic

### EAN code

8034122409948

## ENERGY LABEL

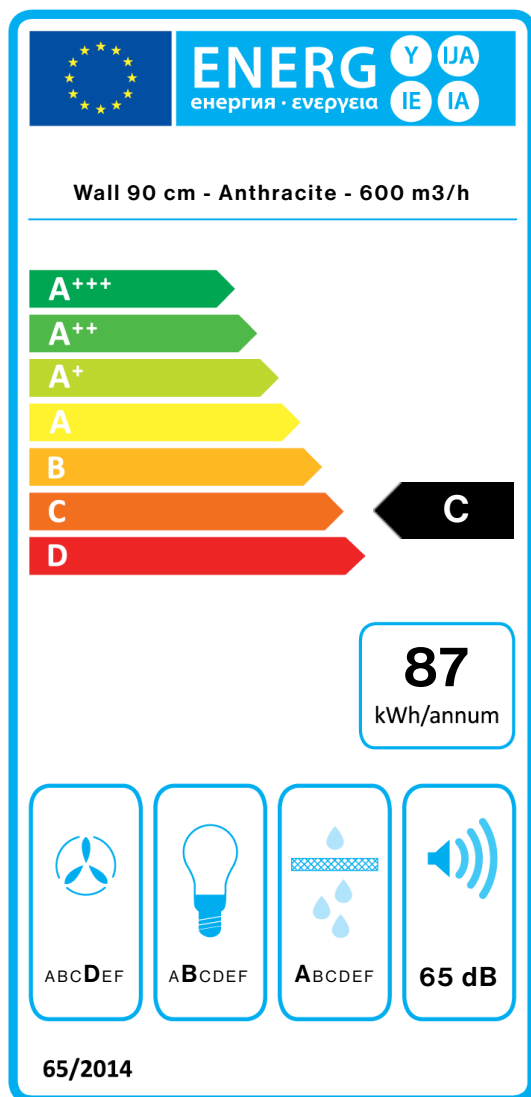

PF		
S	Falmec Spa	
M	Wall 90 cm - Anthracite - 600 m3/h	
AEC	87,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	480,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1,4	
EEL	80,6	
Qbep	303,0	m <sup>3</sup> /h
Pbep	308	Pa
Qboost	480,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lex
Lwa-SPEmax	65	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.