

GINEVRA BOSTON

Version

Wall - 90 cm - Anthracite - 600 m³/h

Collection

Classic

EAN code

8034122409948



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Slider
LED lighting
Metallic grease filter, removable and washable
Charcoal filter

TECHNICAL FEATURES

Installation type
Wall

Dimensions
90 cm

Finishing
Painted anthracite steel
Copper-covered frontal edge

Motor
600 m³/h

Type of control
Slider

Speed
3

Lighting
Led 2x2 W (2700 K)

Filter
2 x Metallic filter "Base" - 235x245 mm (spare part)

Charcoal filter
Round charcoal filter Ø212 mm - Type 2 (included)

Minimum distance
Gas hob: 65 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
22 kg

Net weight
18 kg

Volumes
0.37 m³

Packaging size
Length
995 mm
Height
630 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
230 W

Voltage
220-240V

Frequency
50-60Hz

Plug type
Shuko

MOTOR TECHNICAL SHEET


Maximum capacity
480 m³/h
I.E.C. 61591

Maximum noise level
65 dB(A)re1pW
I.E.C.60704-2-13

Maximum pressure (Pa)
500 Pa

Max. motor power
180 W

ENERGY CLASS
C



GINEVRA BOSTON

Version

Wall - 90 cm - Anthracite - 600
m3/h

Collection

Classic

EAN code

8034122409948

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 |
|--|-----|-----|-----|
| Noise level dB(A)re1pW-I.E.C.60704-2-13 | 49 | 58 | 65 |
| Capacity (m3/h) I.E.C.61591 | 220 | 320 | 480 |
| Maximum pressure (Pa) | 270 | 400 | 500 |
| Power (W) | 100 | 130 | 180 |
| Air outlet | 120 | 120 | 120 |

GINEVRA BOSTON

Version

Wall - 90 cm - Anthracite - 600 m3/h


Collection

Classic

EAN code

8034122409948

ENERGY LABEL

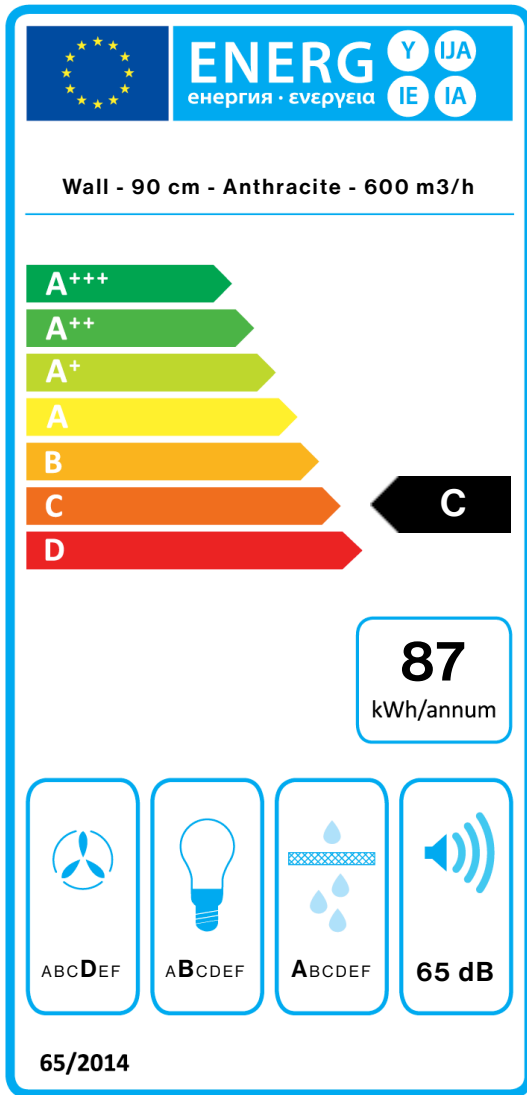

| PF | | |
|------------|--------------------------------------|-------------------|
| S | Falmec Spa | |
| M | Wall - 90 cm - Anthracite - 600 m3/h | |
| AEC | 87,1 | kWh/a |
| EEC | C | |
| FDE | 15,8 | |
| FDEC | D | |
| LE | 25,5 | |
| LEC | B | |
| GFE | 96,0 | |
| GFEC | A | |
| Qmin | 220,0 | m ³ /h |
| Qmax | 480,0 | m ³ /h |
| Qboost | 480,0 | m ³ /h |
| SPEmin | 49 | dBa |
| SPEmax | 65 | dBa |
| SPEboost | - | dBa |
| PO | - | W |
| PS | 0,00 | W |
| PI | | |
| F | 1.4 | |
| EEl | 80,6 | |
| Qbep | 303,0 | m ³ /h |
| Pbep | 308 | Pa |
| Qboost | 480,0 | m ³ /h |
| Wbep | 164,0 | W |
| WL | 4,50 | W |
| Emiddle | 121 | lux |
| Lwa-SPEmax | 65 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.