

ELLE

Version

Island - 180 cm - Black - 800 m³/h

Designer

Collection

Design

EAN code

8034122362533

FEATURES

Perimeter suction

Electronic control

Metallic grease filter, removable and washable

Remote control (optional)

Dimmable lighting

Dynamic Light (2700K - 5600K)

Dialogue system with auto mode

Carbon.Zeo Microtech filter (optional)

Strip Led 3000K until 03.31.22

Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024

OPTIONAL ACCESSORIES

105080053

Remote control

KACL.1039

Carbon.Zeo Microtech filter

KACL.557#N

Extension H1200 Island - Black

KACL.866

Air flow conveyer for re-circulation versions (Island)

TECHNICAL FEATURES

Installation type

Island

Dimensions

180 cm

Finishing

Matte black painted steel

Motor

800 m³/h

Type of control

Electronic control

Speed

3 + boost

Lighting

Strip Led - 2700 K / 5600 K

Minimum distance

Gas hob: 63 cm

Electric hob: 52 cm



Photograph is for information purposes only
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

62 kg

Net weight

51.3 kg

Volumes

0.67 m³

Packaging size

Length

1905 mm

Height

475 mm

Depth

725 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency

50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity

670 m³/h

I.E.C. 61591

Maximum noise level

67 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


500 Pa

Max. motor power

215 W

ENERGY CLASS

C



Falmec_Elle

ELLE

Version

Island - 180 cm - Black - 800
m3/h

Designer

Collection

Design


EAN code

8034122362533

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Power (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

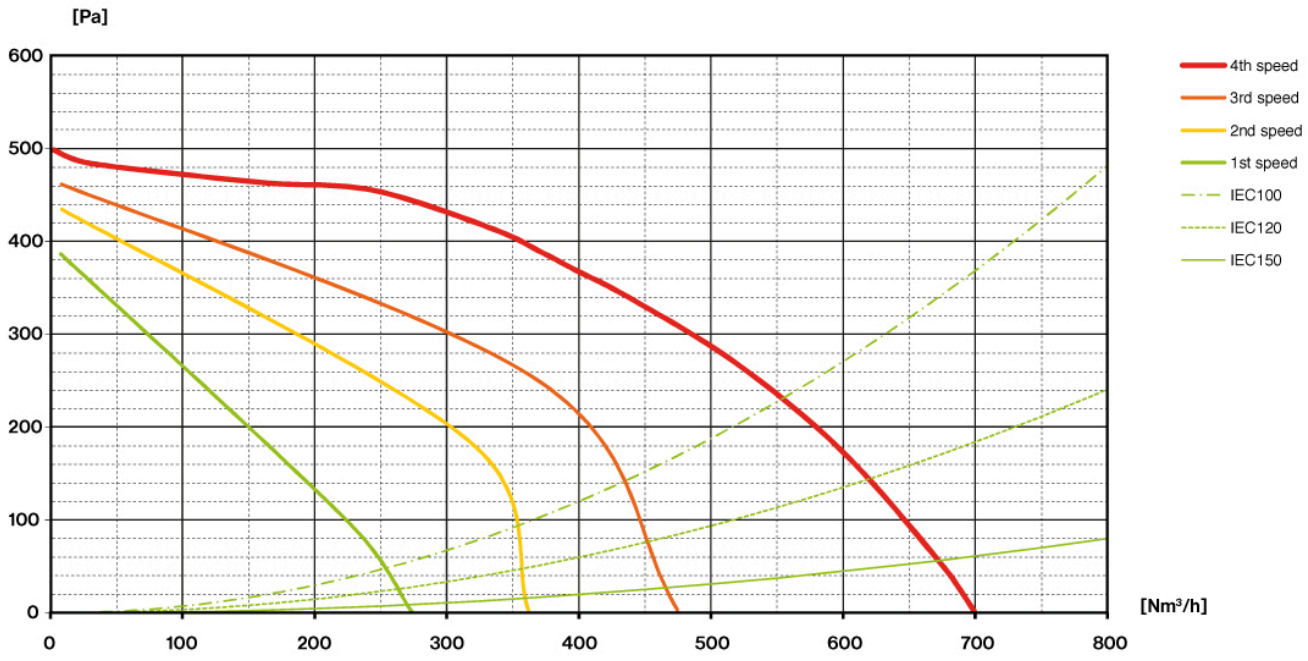

ELLE

Version

Island - 180 cm - Black - 800 m3/h

Designer


Collection

Design

EAN code

8034122362533

ENERGY LABEL

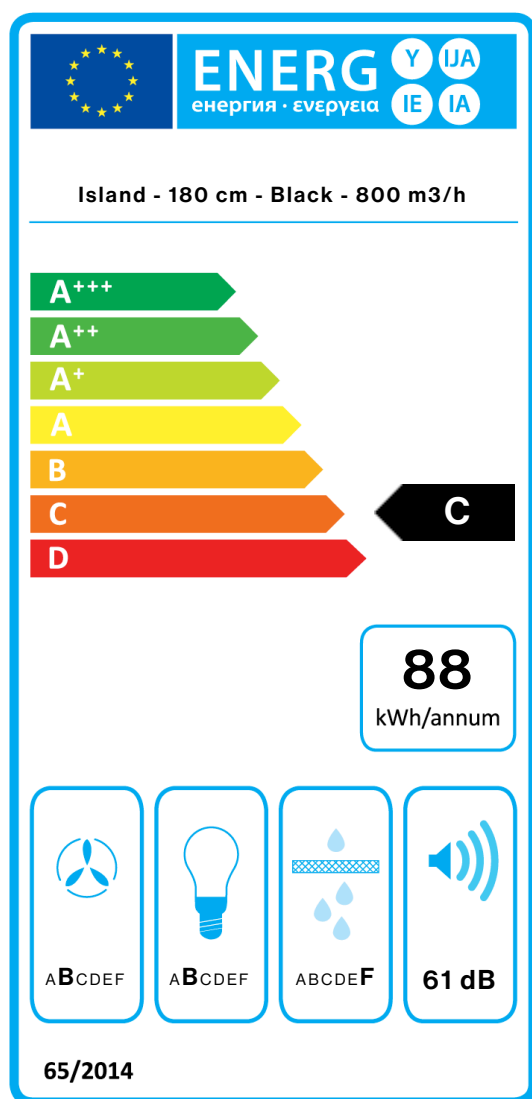

PF		
S	Falmec Spa	
M	Island - 180 cm - Black - 800 m3/h	
AEC	87,8	kWh/a
EEC	C	
FDE	25,5	
FDEC	B	
LE	20,9	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	270,0	m³/h
Qmax	470,0	m³/h
Qboost	670,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1,1	
EEl	74,4	
Qbep	333,0	m³/h
Pbep	407	Pa
Qboost	670,0	m³/h
Wbep	147,7	W
WL	39,00	W
Emiddle	815	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.