

LUMEN ISOLA 175 NRS

Frithængt til højre - 175 cm -
Stål - 800 m³/h

Sortiment

Silence - NRS

EAN Kode

8034122362892



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

NRS teknologi for et roligere køkken

Kantsug

Elektronisk kontrolpanel

Vaskbare rustfrie fedtfilter

Mulighed for Connection

kogeplade

Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

MULIGHEDER FOR TILVALG

01-FJERN

Fjernbetjening med display

07MAGIC

Beskyttende rensklude til
rustfrit stål. Kasse med 10 klude

KACL.1039

Carbon.Zeo Microtech filter

KACL.400

Silent / Conveyor NRS

KACL.572#I

Forlænger H1200 frithængt

TEKNISK BESKRIVELSE

Installation

Frithængt

Dimensioner

175 cm

Materiale

Scotch brite rustfrit stål (AISI
304)

Motor

800 m³/h

Betjening

Elektronisk kontrolpanel

Hastighed

3 + boost

Belysning

Strip led (4000K)

Filter

Metal filter AISI 304,5x220
(Lumen Is.175)

Minimumsafstand

Gaskomfur: 64 cm

Kogeplade: 52 cm

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt

71.2 kg

Nettovægt

58.3 kg

Volumen

0.86 m³

Mål på emballage

Længde

1905 mm

Højde

625 mm

Dybde

725 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug

280 W

Spænding

220-240V

Frekvens

50-60Hz

DATABLAD MOTOR

Maksimal kapacitet

610 m³/h

I.E.C. 61591

Maksimalt støjniveau

54,5 dB(A)re1pW

I.E.C.60704-2-13

Maksimalt tryk (Pa)


510 Pa

Maksimal sugestyrke

224 W

ENERGIKLASSE

C

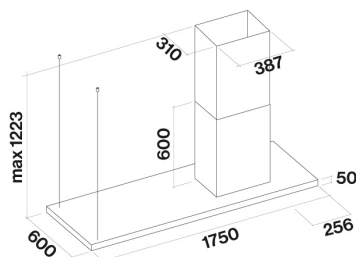

LUMEN ISOLA 175 NRS

Frithængt til højre - 175 cm -
Stål - 800 m³/h

Sortiment

Silence - NRS


EAN Kode

8034122362892

DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	37	41	46	54,5
Kapacitet (m ³ /h) I.E.C.61591	220	290	375	610
Maksimalt tryk (Pa)	390	440	490	510
Forbrug (W)	130	150	178	224
Luftudtag	150	150	150	150

KAPACITET / TRYK

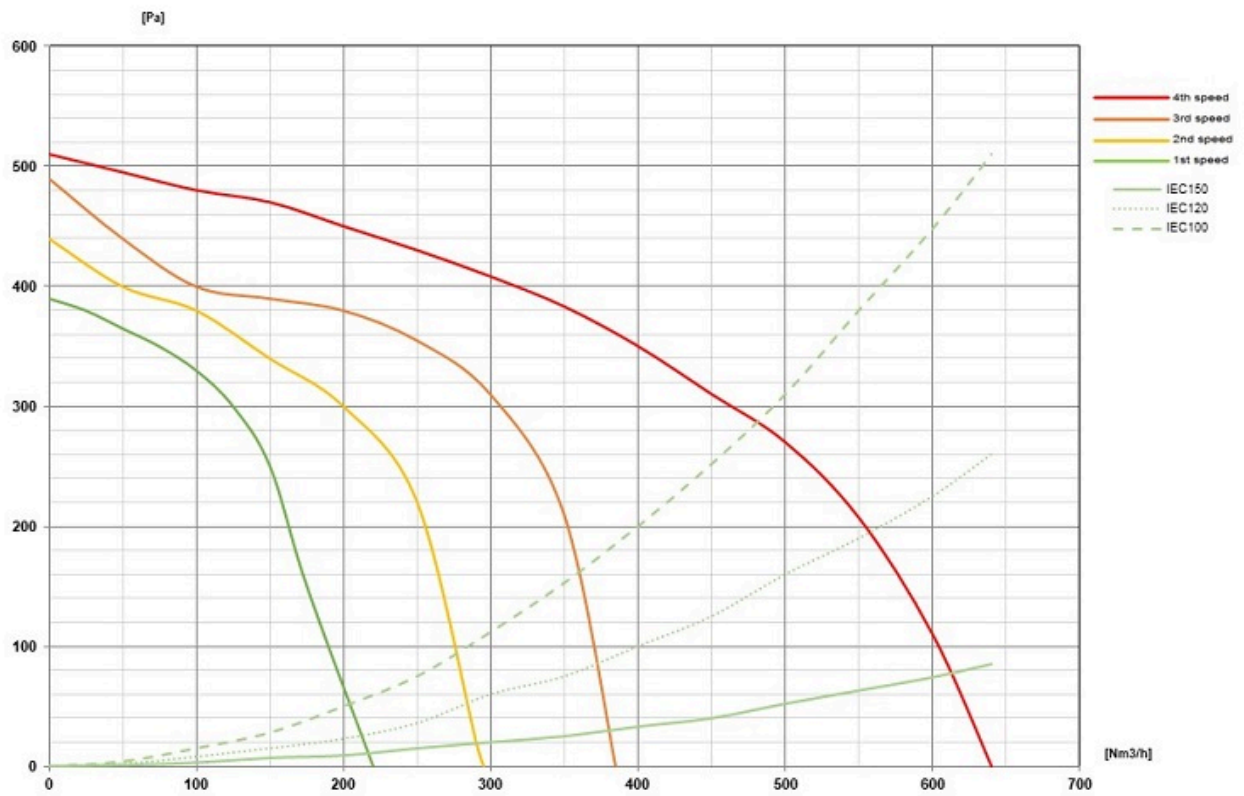

LUMEN ISOLA 175 NRS


Frithængt til højre - 175 cm -
Stål - 800 m³/h

Sortiment

Silence - NRS

EAN Kode

8034122362892

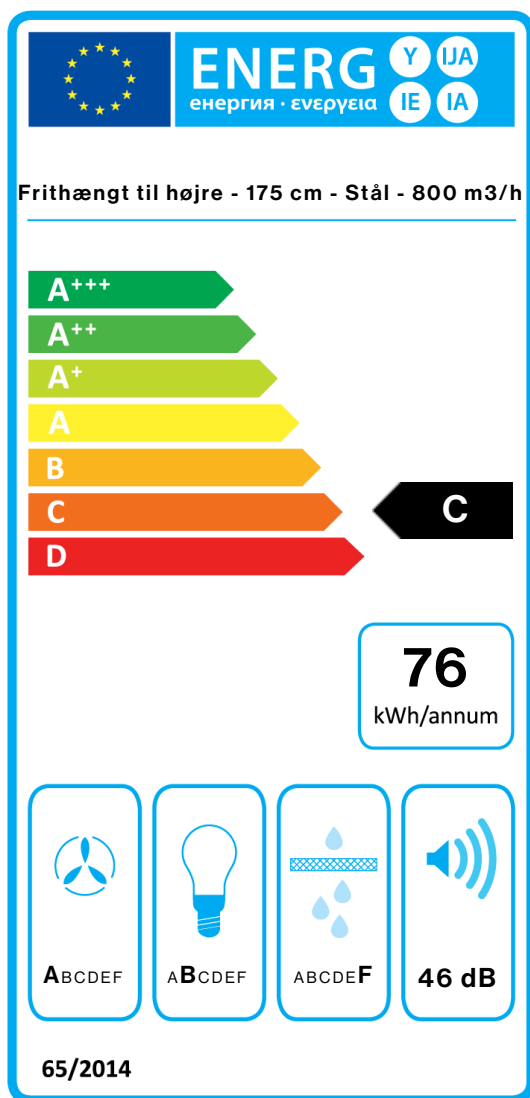

PF		
S	Falmec Spa	
M	Frithængt til højre - 175 cm - Stål - 800 m ³ /h	
AEC	76,3	kWh/a
EEC	C	
FDE	28,9	
FDEC	A	
LE	24,0	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	70,1	
Qbep	369,0	m ³ /h
Pbep	369	Pa
Qboost	610,0	m ³ /h
Wbep	131,0	W
WL	39,00	W
Emiddle	937	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.