

LUMEN ISLAND 175 NRS

Version
(Left) - Island - 175 cm - Inox -
800 m3/h

Designer

Collection
Silence - NRS

EAN code
8034122362908

FEATURES

NRS technology for a quieter kitchen
Perimeter suction
Electronic control
Metallic grease filter, removable and washable
Dialogue system with auto mode
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

105080053
Remote control
KACL.1039
Carbon.Zeo Microtech filter
KACL.400
Silent / Conveyer NRS
KACL.572#I
Extension H1200 Island - Inox
KACL.815
Protective cleaning cloths for
stainless steel (box 10 pcs)

TECHNICAL FEATURES

Installation type
Island
Dimensions
175 cm
Finishing
Scotch brite stainless steel (AISI
304)
Motor
800 m³/h
Type of control
Electronic control
Speed
3 + boost
Lighting
Strip led (4000K)
Filter
Metal filter AISI 304,5x220
(spare part)
Minimum distance
Gas hob: 64 cm
Electric hob: 52 cm



Photograph is for information purposes only
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND
VOLUMES


Gross weight
71.2 kg
Net weight
58.3 kg
Volumes
0.86 m³
Packaging size
Length
1905 mm
Height
625 mm
Depth
725 mm

CONSUMPTION AND
CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz

MOTOR TECHNICAL SHEET

Maximum capacity
610 m³/h
I.E.C. 61591
Maximum noise level
54,5 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
510 Pa
Max. motor power
224 W
ENERGY CLASS
C

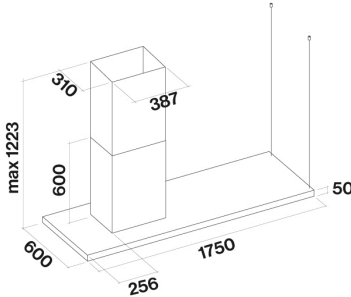

LUMEN ISLAND 175 NRS

Version
(Left) - Island - 175 cm - Inox -
800 m3/h

Designer


Collection
Silence - NRS

EAN code
8034122362908

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

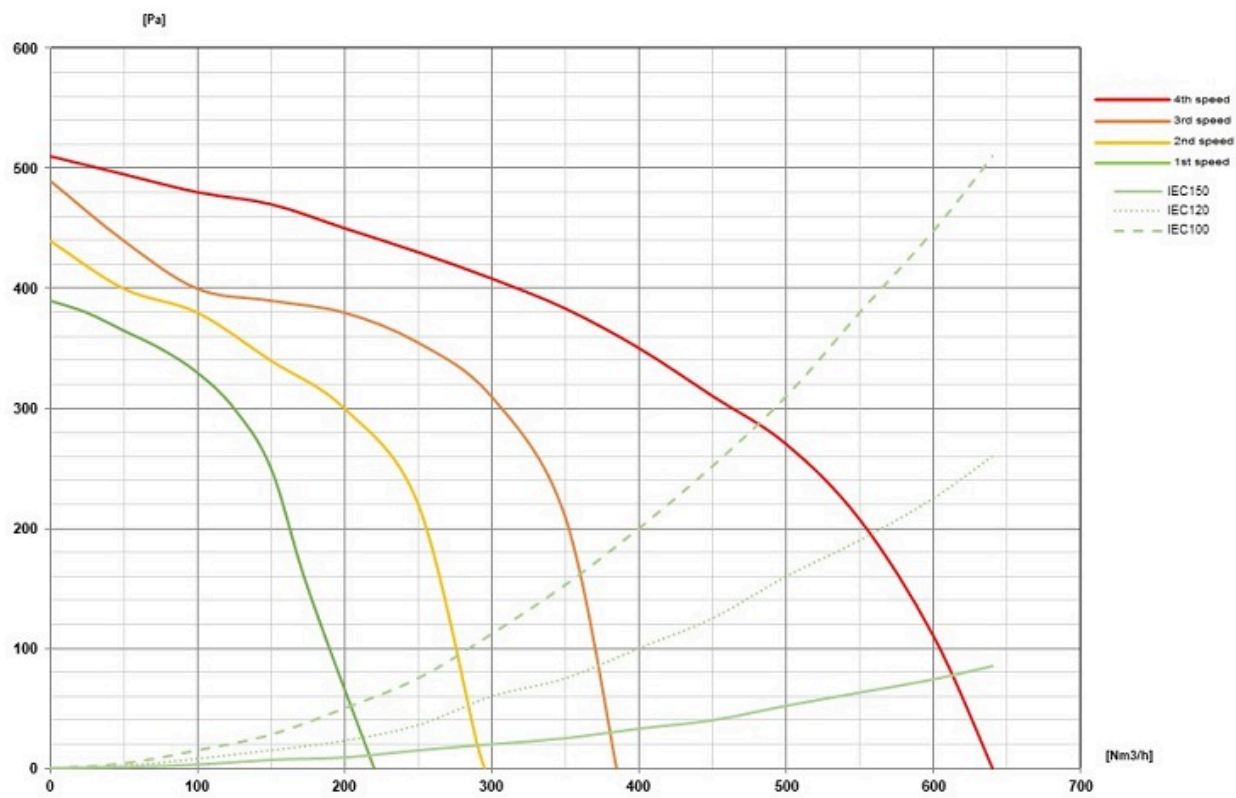

LUMEN ISLAND 175 NRS


Version
(Left) - Island - 175 cm - Inox -
800 m3/h

Designer

Collection
Silence - NRS

EAN code
8034122362908

ENERGY LABEL

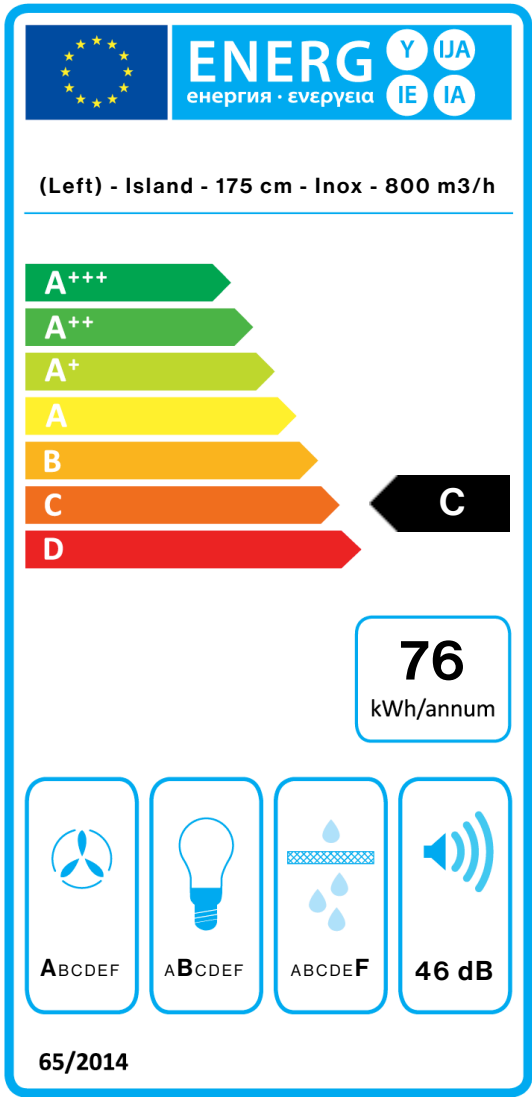

PF		
S	Falmec Spa	
M	(Left) - Island - 175 cm - Inox - 800 m3/h	
AEC	76,3	kWh/a
EEC	C	
FDE	28,9	
FDEC	A	
LE	24,0	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	70,1	
Qbep	369,0	m³/h
Pbep	369	Pa
Qboost	610,0	m³/h
Wbep	131,0	W
WL	39,00	W
Emiddle	937	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.