


LUMEN NRS

Wall 90 cm - 800 m³/h

Silence - NRS

8034122362922

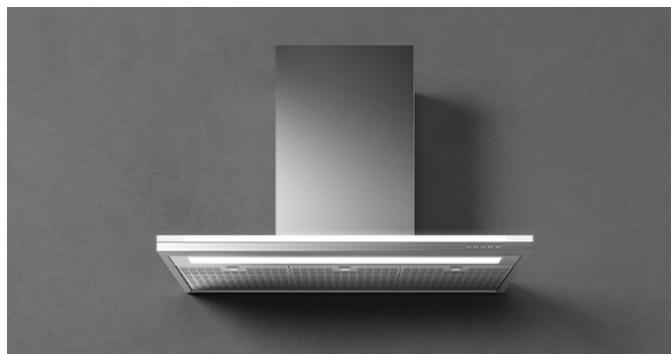

*The photograph is purely for information
It may not correspond to the selected version.*

OMINAISUUDET

NRS teknologia äänettömään keittiöön

Elektroniset kytkimet

LED-valaistus

Ylin suodatin, irroitettava ja pestävä

Kaukosäädin lisävarusteena

Dialogijärjestelmän

automaattinen tila

Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024

OPTIONAL ACCESSORIES

105080053

Kaukosäädin lisävaruste

KACL.1039

Carbon.Zeo Microtech filter

KACL.400

Äänenvaimennin/Ilmanohjain

KACL.570#I

Extension H700 Wall - Inox

KACL.571#I

Extension H960 Wall - Inox

KACL.815

RST puhdistuspyyhkeet

TECHNICAL FEATURES

Installation type

Seinä

Dimensions

90 cm

Viimeistelystä

Kiillotettu ruostumaton teräs (AISI 304)

Motor

800 m³/h

Type of control

Elektroniset kytkimet

Speed settings

3 + boost

Lighting

Strip led (4000K)

: 63 cm

: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

37 kg

30.1 kg

0.39 m³

995 mm

660 mm

595 mm

CONSUMPTION AND CONNECTION FEATURES

280 W

220-240V

50-60Hz

MOTOR TECHNICAL SHEET

610 m³/h

I.E.C. 61591


54,5 dB(A)re1pW

I.E.C.60704-2-13

510 Pa

224 W

B



LUMEN NRS


Wall 90 cm - 800 m3/h

Silence - NRS

8034122362922

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
	37	41	46	54,5
dB(A)re1pW-I.E.C.60704-2-13				
(m3/h)	220	290	375	610
I.E.C.61591				
	390	440	490	510
	130	150	178	224
	150	150	150	150

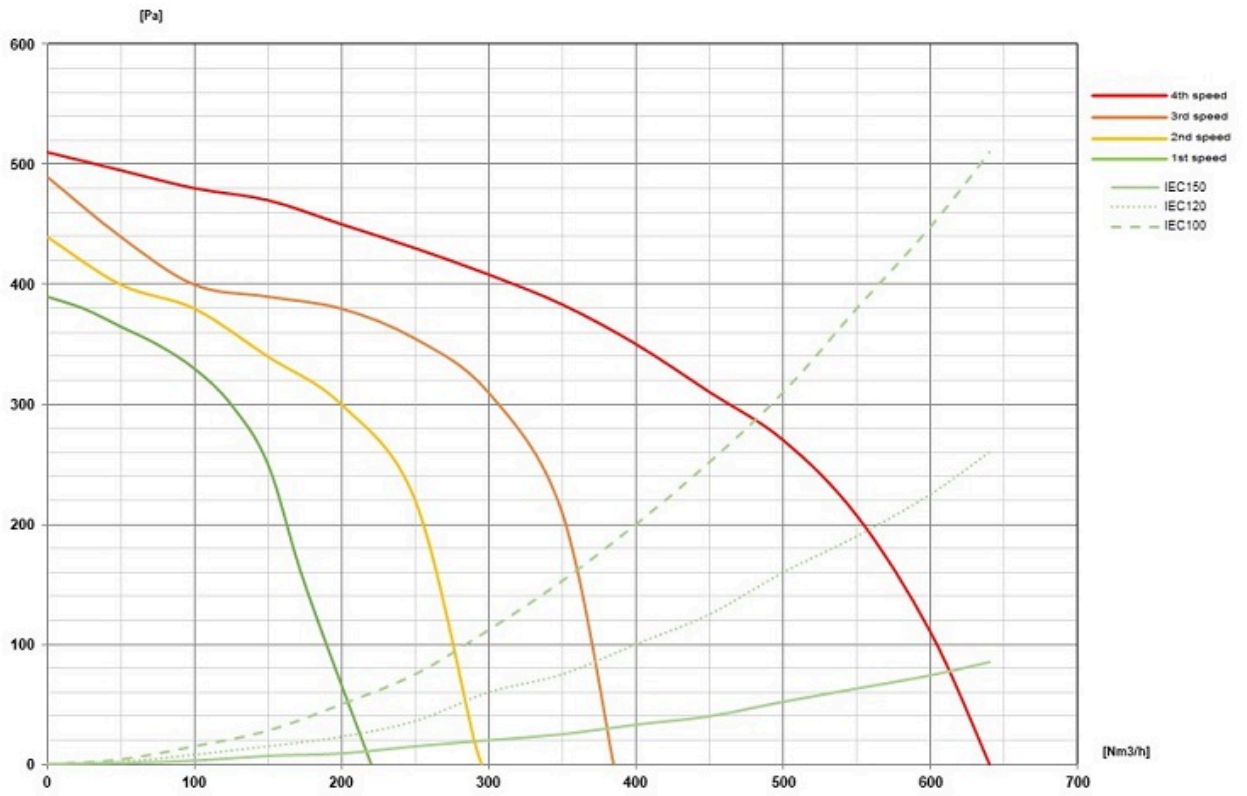


LUMEN NRS

Wall 90 cm - 800 m3/h

Silence - NRS

8034122362922

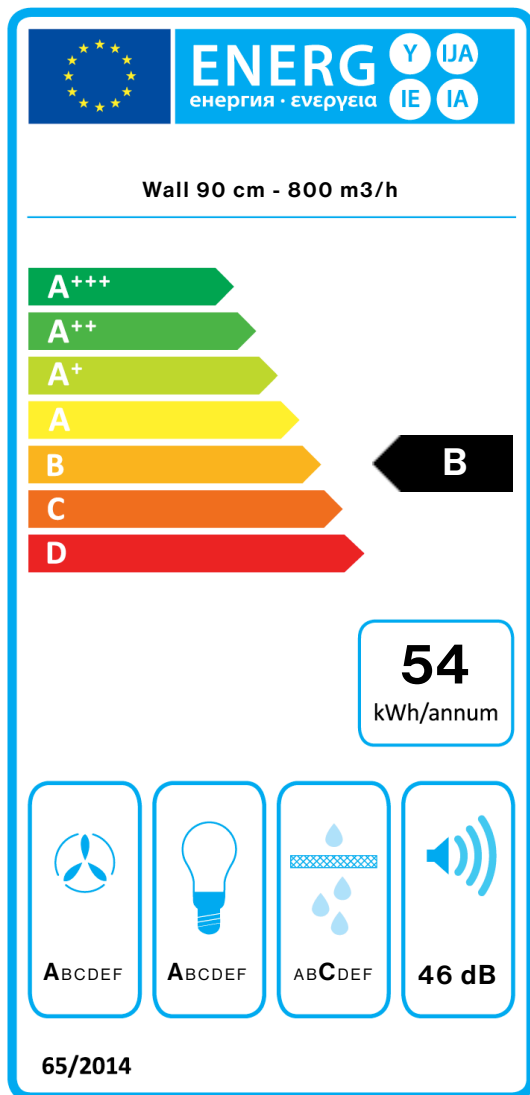

PF		
S	Falmec Spa	
M	Wall 90 cm - 800 m3/h	
AEC	53,7	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	35,2	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	58,5	
Qbep	369,0	m ³ /h
Pbep	369	Pa
Qboost	610,0	m ³ /h
Wbep	131,0	W
WL	8,00	W
Emiddle	282	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.