

## LUMEN NRS

### Versiyon


Wall 90 cm - 800 m3/h

### Koleksiyon

Silence - NRS

### EAN kodu

8034122362922

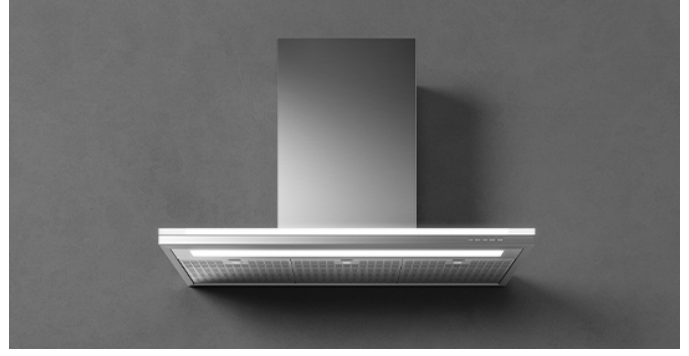

Fotoğraf tamamen bilgi amaçlıdır  
Seçili versiyona ait olmayabilir.

## ÖZELLİKLER

**Daha sessiz bir mutfak için NRS teknolojisi**

**Elektronik kontrol**

**LED aydınlatma**

**Çıkarılabilir ve yıkanabilir**

**"Top" filtre**

**Opsiyonel uzaktan kumanda**

**Otomatik modlu diyalog sistemi**

**Carbon.Zeo Microtech filter**

**(optional)**

Availability Carbon.Zeo filter

KACL.1039 for hoods produced  
from Sept. 2024

## OPSİYONEL AKSESUARLAR

### 105080053

Uzaktan Kumanda

### KACL.1039

Carbon.Zeo Microtech filter

### KACL.400

Sessiz / Taşıyıcı (Konveyör) NRS

### KACL.570#I

Uzatma bacası Y: 700 - Duvar

(Lumina NRS - Plane NRS -

Horizon NRS - Aria NRS - Flipper  
NRS için)

### KACL.571#I

Uzatma bacası Y:960 - Duvar

(Lumina NRS - Plane NRS -

Horizon NRS - Aria NRS - Flipper  
NRS için)

### KACL.815

Paslanmaz çelik yüzeyler için

koruyucu temizlik bezleri (10

adetli kutu)

## TEKNİK ÖZELLİKLER

### Kurulum tipi

Duvar

### Ölçüler

90 cm

### Finişler

Scotch brite paslanmaz çelik

(AISI 304)

### Motor

800 m<sup>3</sup>/h

### Kontrol tipi

Elektronik kontrol

### Hız ayarı

3 + boost

### Aydınlatma

Strip led (4000K)

### Minimum uzaklık

Gazlı ocak: 63 cm

Elektrikli ocak: 52 cm

## PAKETLEME: AĞIRLIK VE HACİM

### Brüt ağırlık

37 kg

### Net ağırlık

30.1 kg

### Hacimler

0.39 m<sup>3</sup>

### Paketleme ölçüsü

Uzunluk

995 mm

Yükseklik

660 mm

Derinlik

595 mm

## TÜKETİM VE BAĞLANTI ÖZELLİKLERİ

### Maksimum tüketim

280 W

### Akım

220-240V

### Frekans

50-60Hz

## MOTOR TEKNİK VERİLERİ

### Maksimum kapasite

610 m<sup>3</sup>/h

I.E.C. 61591

### Maksimum ses seviyesi

54,5 dB(A)re1pW

I.E.C.60704-2-13

### Maksimum basınç (Pa)


510 Pa

### Maksimum motor gücü

224 W

### ENERJİ SINIFI

B



## LUMEN NRS

### Versiyon

Wall 90 cm - 800 m3/h

### Koleksiyon

Silence - NRS


### EAN kodu

8034122362922

## MOTOR TEKNİK VERİLERİ

| Motor hızı  | 1   | 2   | 3   | 4    |
|---|-----|-----|-----|------|
| Ses seviyesi<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 37  | 41  | 46  | 54,5 |
| Kapasite (m3/h)<br>I.E.C.61591                          | 220 | 290 | 375 | 610  |
| Maksimum basınç (Pa)                                    | 390 | 440 | 490 | 510  |
| Gücü (W)  | 130 | 150 | 178 | 224  |
| Hava çıkışı   | 150 | 150 | 150 | 150  |

# KAPASİTE / BASINÇ

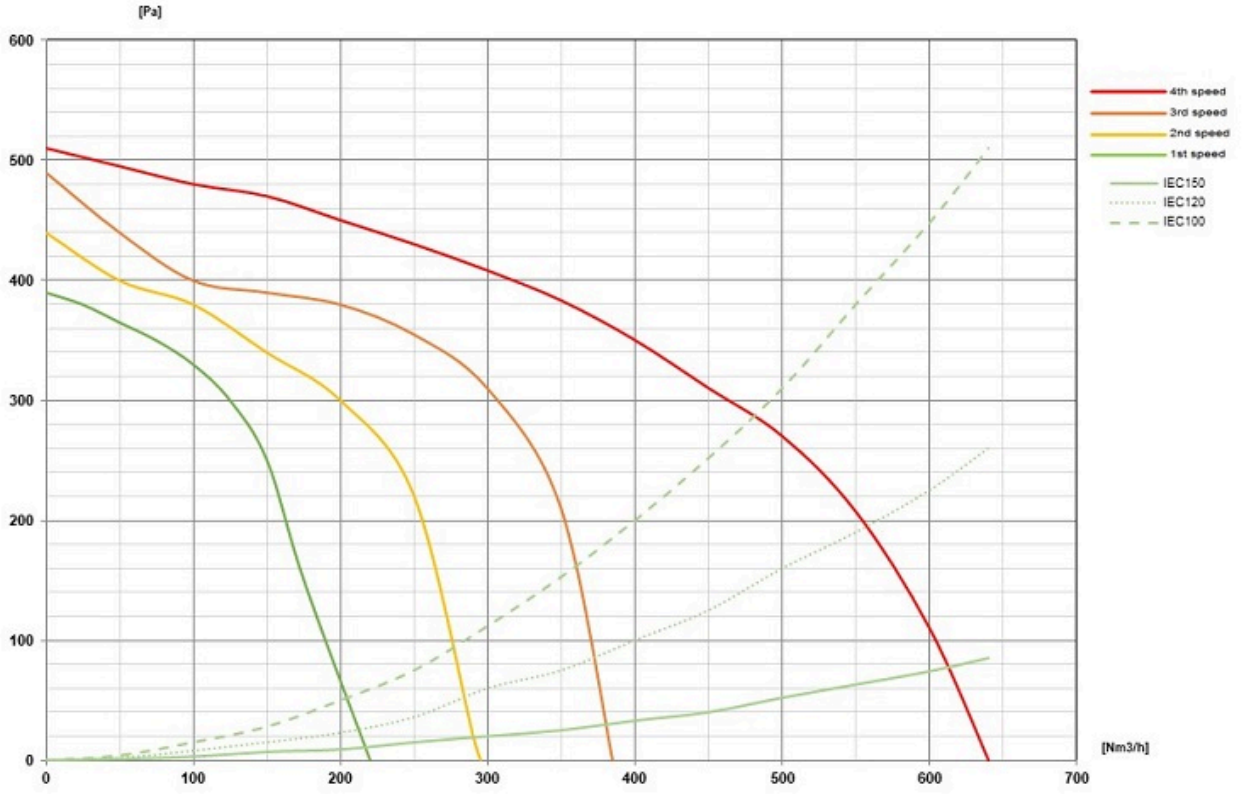

## LUMEN NRS

### Versiyon

Wall 90 cm - 800 m3/h


### Koleksiyon

Silence - NRS

### EAN kodu

8034122362922

## ENERJİ ETİKETİ

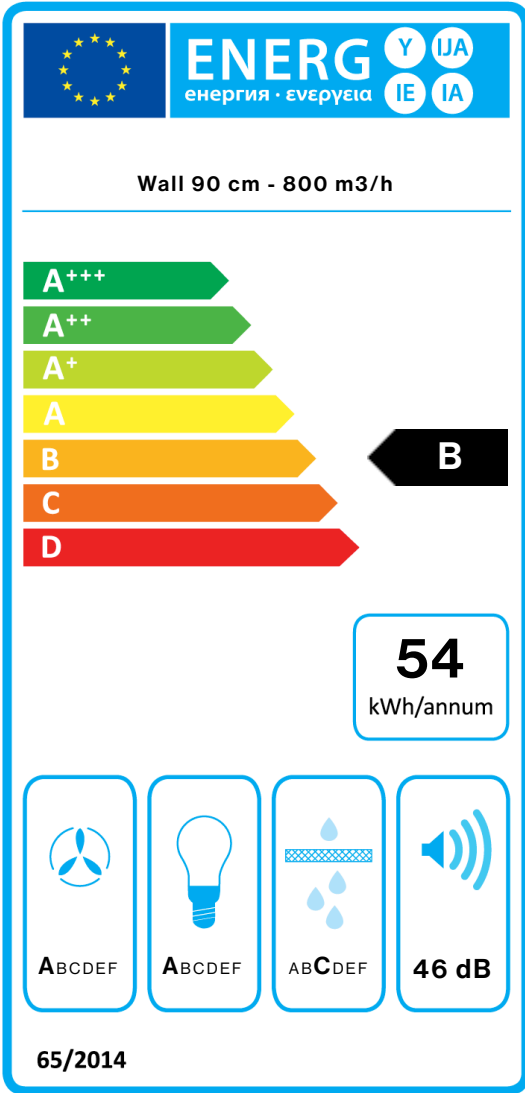

| PF         |                       |       |
|------------|-----------------------|-------|
| S          | Falmec Spa            |       |
| M          | Wall 90 cm - 800 m3/h |       |
| AEC        | 53,7                  | kWh/a |
| EEC        | B                     |       |
| FDE        | 28,9                  |       |
| FDEC       | A                     |       |
| LE         | 35,2                  |       |
| LEC        | A                     |       |
| GFE        | 80,0                  |       |
| GFEC       | C                     |       |
| Qmin       | 220,0                 | m³/h  |
| Qmax       | 375,0                 | m³/h  |
| Qboost     | 610,0                 | m³/h  |
| SPEmin     | 37                    | dBa   |
| SPEmax     | 46                    | dBa   |
| SPEboost   | 55                    | dBa   |
| PO         | -                     | W     |
| PS         | 0,48                  | W     |
| PI         |                       |       |
| F          | 1                     |       |
| EEl        | 58,5                  |       |
| Qbep       | 369,0                 | m³/h  |
| Pbep       | 369                   | Pa    |
| Qboost     | 610,0                 | m³/h  |
| Wbep       | 131,0                 | W     |
| WL         | 8,00                  | W     |
| Emiddle    | 282                   | lux   |
| Lwa-SPEmax | 46                    | dBa   |

65/2014'e göre PF\_Ürün fişi S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). 66/2014'e göre PI\_Ek bilgi F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.