

VIRGOLA NRS

Version
Built-in - 120 cm - 800 m3/h

Collection
Silence - NRS

EAN code
8034122363653



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Glass panel
- NRS technology for a quieter kitchen
- Electronic control
- Metallic grease filter, removable and washable
- Combined regenerable Carbon.Zeo filter (optional)
- Remote control (optional)
- Dynamic Light (2700K - 5600K)
- Dialogue system with auto mode

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

- 105080053
Remote control
- KACL.1039
Carbon.Zeo Microtech filter
- KACL.400
Silent / Conveyer NRS
- KCVJN.19#I
Chimney kit Virgola Touch NRS H
315 + extension H 295

TECHNICAL FEATURES

- Installation type
Built-in
- Dimensions
120 cm
- Finishing
Scotch brite stainless steel
- Motor
800 m³/h
- Type of control
Electronic control
- Speed
3 + boost
- Lighting
Led 4x1,2 W - 2700 K / 5600 K
- Minimum distance
Gas hob: 57 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES



- Gross weight
30.2 kg
- Net weight
23 kg
- Volumes
0.4 m³
- Packaging size
Length
1330 mm
Height
415 mm
Depth
725 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity
610 m³/h
I.E.C. 61591
- Maximum noise level
54,5 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)
510 Pa
- Max. motor power
224 W
- ENERGY CLASS
B



VIRGOLA NRS

Version
Built-in - 120 cm - 800 m3/h


Collection
Silence - NRS

EAN code
8034122363653

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

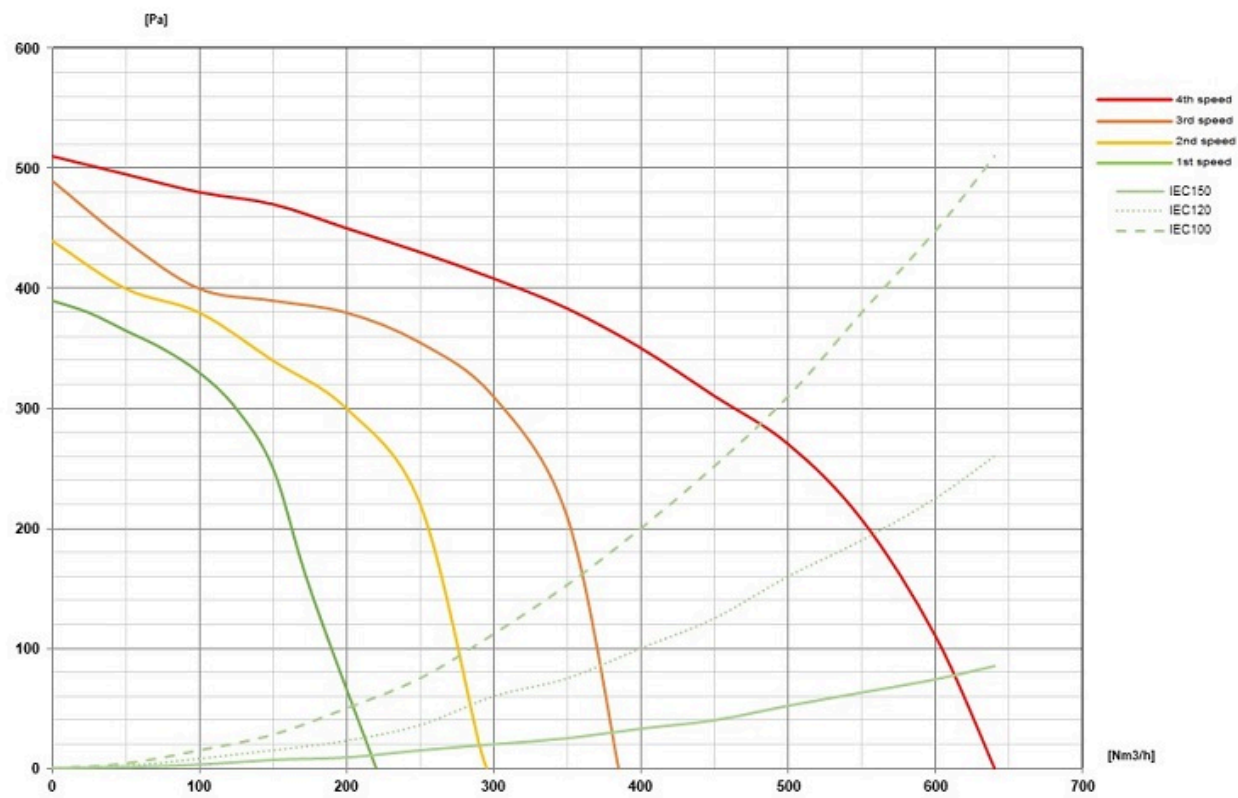


VIRGOLA NRS

Version
Built-in - 120 cm - 800 m3/h

Collection
Silence - NRS

EAN code
8034122363653

ENERGY LABEL

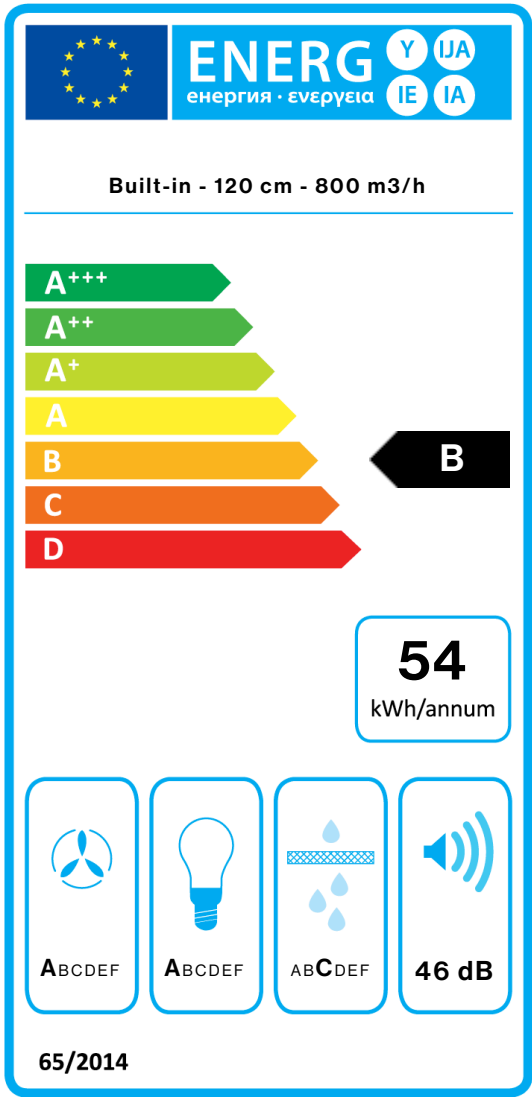

PF		
S	Falmec Spa	
M	Built-in - 120 cm - 800 m3/h	
AEC	54,1	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	28,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	220,0	m³/h
Qmax	375,0	m³/h
Qboost	610,0	m³/h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	54	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	58,7	
Qbep	369,0	m³/h
Pbep	369	Pa
Qboost	610,0	m³/h
Wbep	131,0	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.