

VIRGOLA

Version
Evolution - Built-in 120 cm -
Inox - 600 m3/h

Collection
Design

EAN code
8034122363356



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Glass panel
- Electronic control
- Metallic grease filter, removable and washable
- Optional charcoal filter
- Dimmable led lighting
- Dynamic LED Light (2700K - 5600K)

Dimmable led lighting since 04.17.23

OPTIONAL ACCESSORIES

- KACL.108**
Glass shelf 120 cm
- KACL.960**
Charcoal filter
- KACL.961**
Charcoal and Zeolite filter
- KCVJN.00#3**
Telescopic chimney h 185 + h 185
- KCVJN.01#3**
Kit Chimney Virgola-Move H120
Stainless Steel

TECHNICAL FEATURES

- Installation type**
Built-in
- Dimensions**
120 cm
- Finishing**
Scotch brite stainless steel
- Motor**
600 m³/h
- Type of control**
Electronic control
- Lighting**
Led 4x1,2 W - 2700 K / 5600 K
- Filter**
Metallic filter "Base" - 278x207 mm
- Minimum distance**
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


- Gross weight**
16.5 kg
- Net weight**
12.7 kg
- Volumes**
0.25 m³
- Packaging size**
Length
1295 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
230 W
- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko

MOTOR TECHNICAL SHEET

- Maximum capacity**
580 m³/h
I.E.C. 61591
- Maximum noise level**
65 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
480 Pa
- Max. motor power**
200 W
- ENERGY CLASS**
B



VIRGOLA

Version
Evolution - Built-in 120 cm -
Inox - 600 m3/h


Collection
Design

EAN code
8034122363356

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Noise level dB(A)re1pW-I.E.C.60704-2-13	47	56	65
Capacity (m3/h) I.E.C.61591	240	350	580
Maximum pressure (Pa)	250	400	480
Motor Power (W)	130	160	200
Air outlet	150	150	150

CAPACITY / PRESSURE

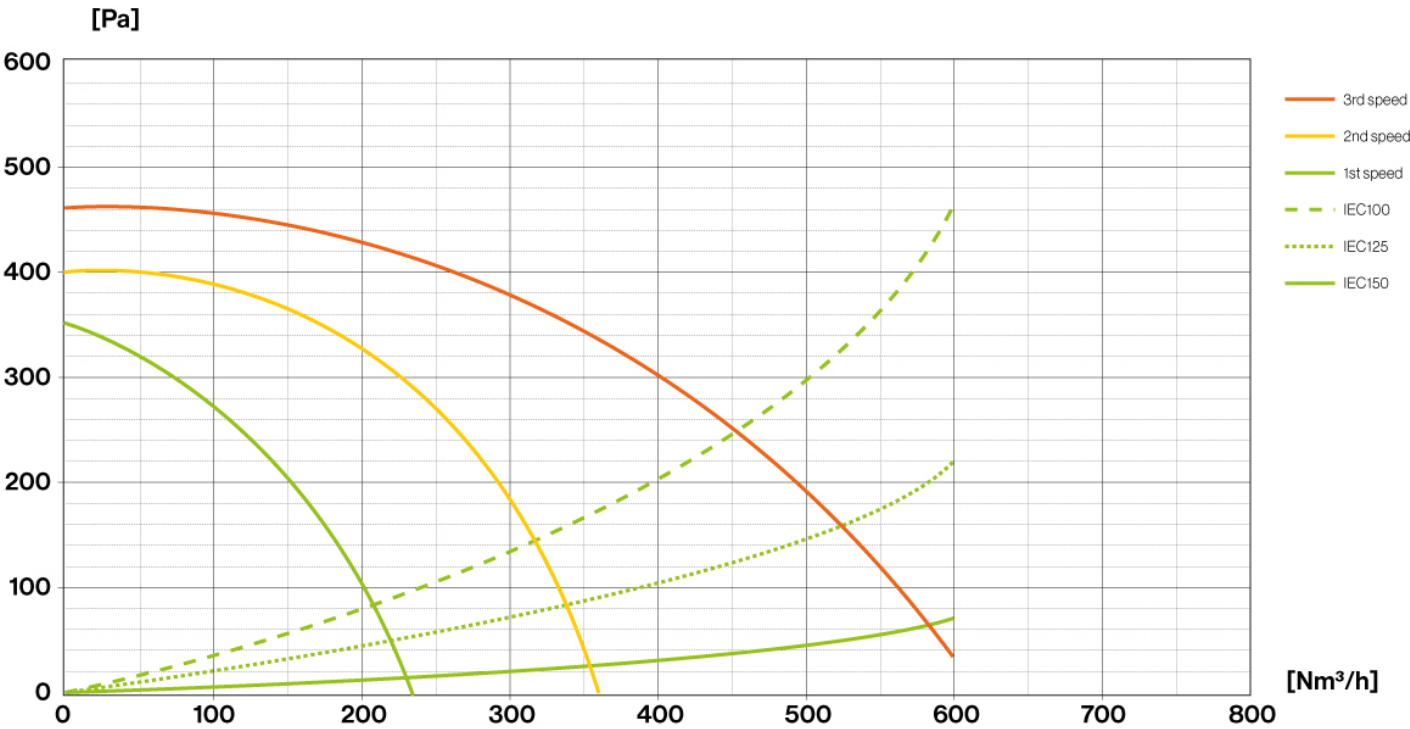


VIRGOLA

Version
Evolution - Built-in 120 cm -
Inox - 600 m3/h

Collection
Design

EAN code
8034122363356

ENERGY LABEL

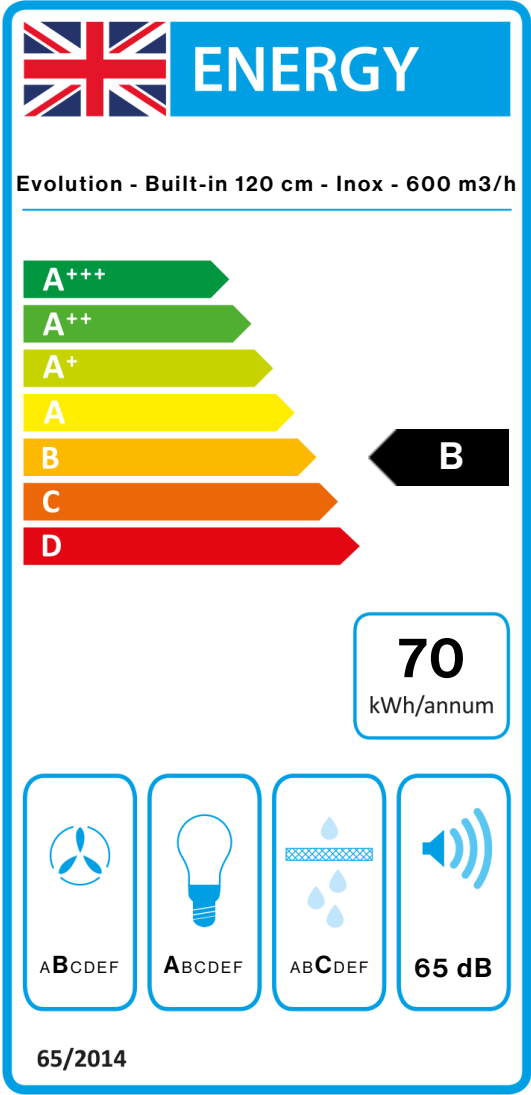

PF		
S	Falmec Spa	
M	Evolution - Built-in 120 cm - Inox - 600 m3/h	
AEC	69,8	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	31,4	
LEC	A	
GFE	80,0	
GFEC	C	
Qmin	240,0	m³/h
Qmax	580,0	m³/h
Qboost	580,0	m³/h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.2	
EEL	69,9	
Qbep	360,0	m³/h
Pbep	337	Pa
Qboost	580,0	m³/h
Wbep	145,0	W
WL	8,60	W
Emiddle	270	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.