

VIRGOLA

Version

Evolution - Built-in 60 cm - Inox
- 600 m³/h

Collection

DESIGNER SERIES - Design

EAN code

8034122363448



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Slide out glass panel
Electronic controls
Metallic grease filter, removable
and washable
Optional charcoal filter
Dimmable lighting
Dynamic Light (2700K - 5600K)

OPTIONAL ACCESSORIES

KACL.106

Glass shelf 60 cm

KCVJN.00#3

Telescopic chimney h 185 + h 185
- Inox

KCVJN.01#3

Chimney h 120 mm - Inox

TECHNICAL FEATURES

Installation type

Built-in

Dimensions

60 cm

Finishing

Scotch brite stainless steel

Motor

600 m³/h

Type of control

Electronic controls

Lighting

Led 2x1,2 W - 2700 K / 5600 K

Filter

Metallic filter "Base" - 245x207
mm

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

11.5 kg

Net weight

9.1 kg

Volumes

0.13 m³

Packaging size

Length

705 mm

Height

410 mm

Depth

465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

230 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

580 m³/h

I.E.C. 61591

Maximum sound level

65 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


480 Pa

Maximum motor power

200 W

ENERGY CLASS

B

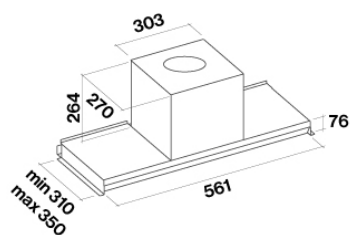

VIRGOLA

Version

Evolution - Built-in 60 cm - Inox
- 600 m³/h

Collection

DESIGNER SERIES - Design


EAN code

8034122363448

MOTOR TECHNICAL SHEET

Motor speed	1	2	3
Sound level dB(A)re1pW-I.E.C.60704-2-13	47	56	65
Capacity (m ³ /h) I.E.C.61591	240	350	580
Maximum pressure (Pa)	250	400	480
Power (W)	130	160	200
Air outlet	150	150	150

CAPACITY / PRESSURE

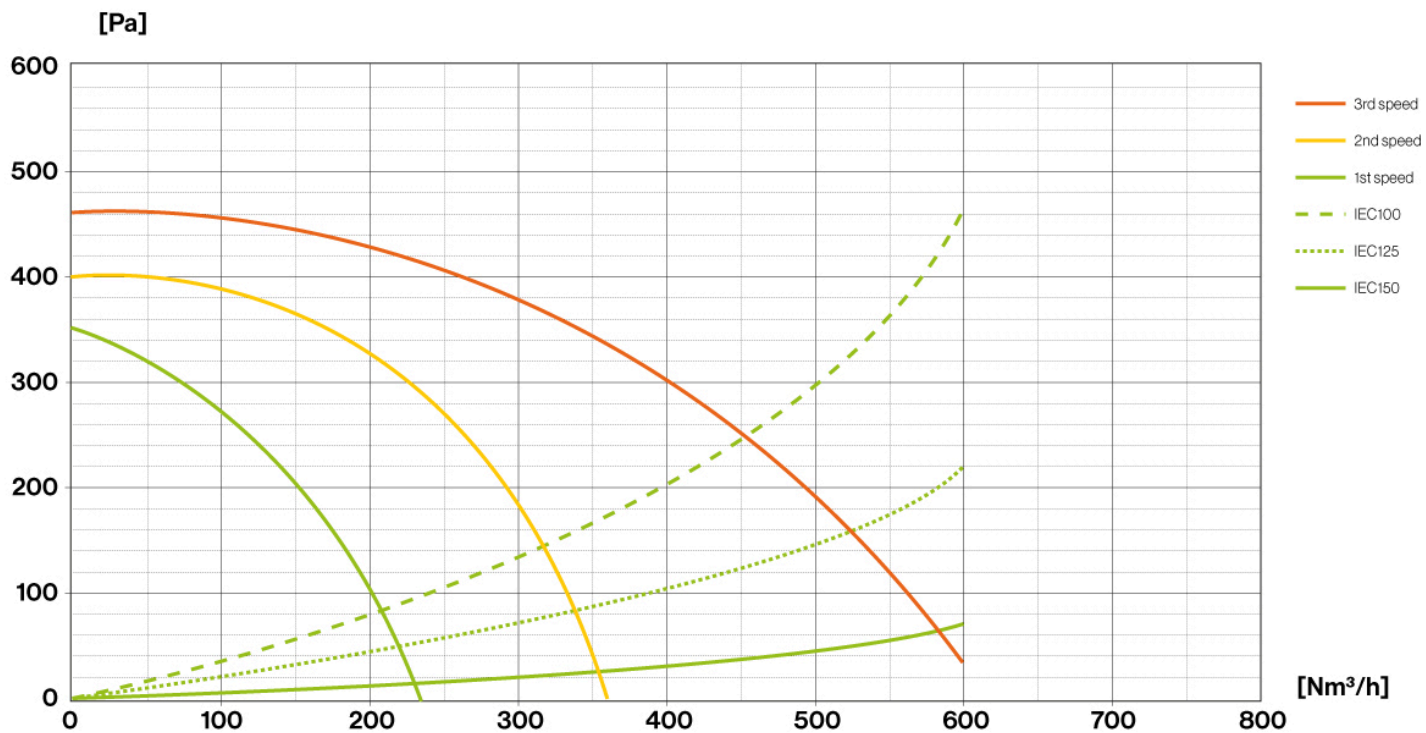

VIRGOLA

Version

Evolution - Built-in 60 cm - Inox
- 600 m3/h


Collection

DESIGNER SERIES - Design

EAN code

8034122363448

ENERGY LABEL

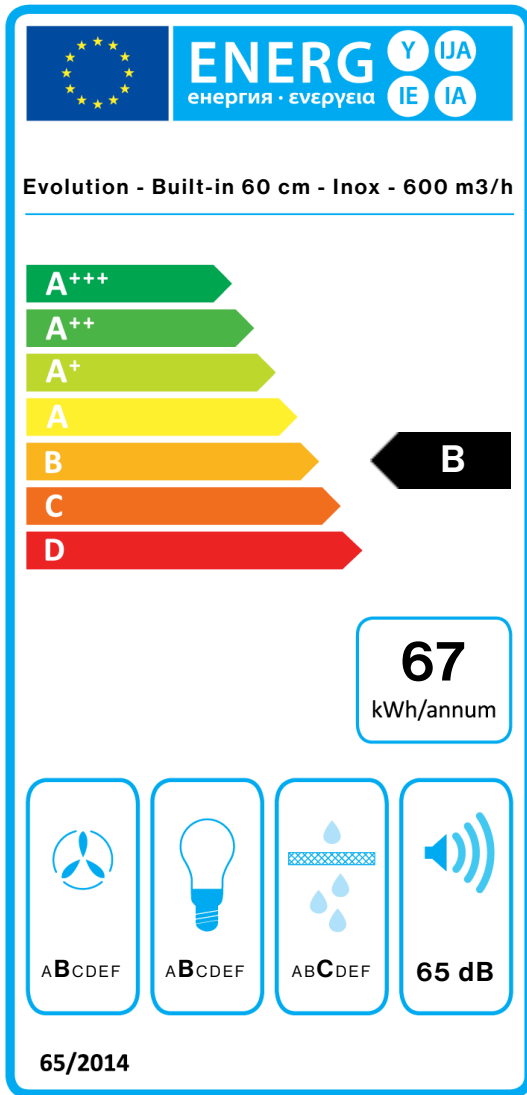

PF		
S	Falmec Spa	
M	Evolution - Built-in 60 cm - Inox - 600 m3/h	
AEC	67,4	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	27,9	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	240,0	m³/h
Qmax	580,0	m³/h
Qboost	580,0	m³/h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W

PI		
F	1.2	
EEl	68,8	
Qbep	360,0	m³/h
Pbep	337	Pa
Qboost	580,0	m³/h
Wbep	145,0	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.