

VIRGOLA

Evolution - Integroitu 60 cm -
Inox - 600 m³/h

Design

8034122363448



The photograph is purely for information
It may not correspond to the selected version.

OMINAISUUDET

Karkaistu lasi, kääntyvä lasi
Elektroniset kytkimet
Metalliset rasvasuodattimet,
irroitettavat ja pestävät
Aktiivihiilisuodatin
lisävarusteena
Himmennettävä LED valaistus
Säädettävä LED valosävy (2700
- 5600 K)

OPTIONAL ACCESSORIES

KACL.106

Lasihylly 60 (lisävaruste)

KACL.960

Charcoal filter

KCVJN.00#3

Teleskooppinen
hormiputkensuoja h185+h185
(lisävaruste) - Virgola/Move

KCVJN.01#3

Hormiputkensuoja h120
(lisävaruste) - Virgola/Move

TECHNICAL FEATURES

Installation type

Integroitu

Dimensions

60 cm

Viimeistelystä

Kiillotettu ruostumaton teräs

Motor

600 m³/h

Type of control

Elektroniset kytkimet

Lighting

Led 2x1,2 W - 2700 K / 5600 K

Filter

Metallic filter "Base" - 245x207
mm

: 52 cm

: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

11.5 kg

9.1 kg

0.13 m³

705 mm

410 mm

465 mm

CONSUMPTION AND CONNECTION FEATURES

230 W

220-240V

50-60Hz

Shuko

MOTOR TECHNICAL SHEET

580 m³/h

I.E.C. 61591


65 dB(A)_{re1pW}

I.E.C.60704-2-13

480 Pa

200 W

B



VIRGOLA


Evolution - Integroitu 60 cm -
Inox - 600 m³/h

Design

8034122363448

MOTOR TECHNICAL SHEET

Speed motor	1	2	3
dB(A)re1pW-I.E.C.60704-2-13	47	56	65
(m ³ /h) I.E.C.61591	240	350	580
	250	400	480
	130	160	200
	150	150	150

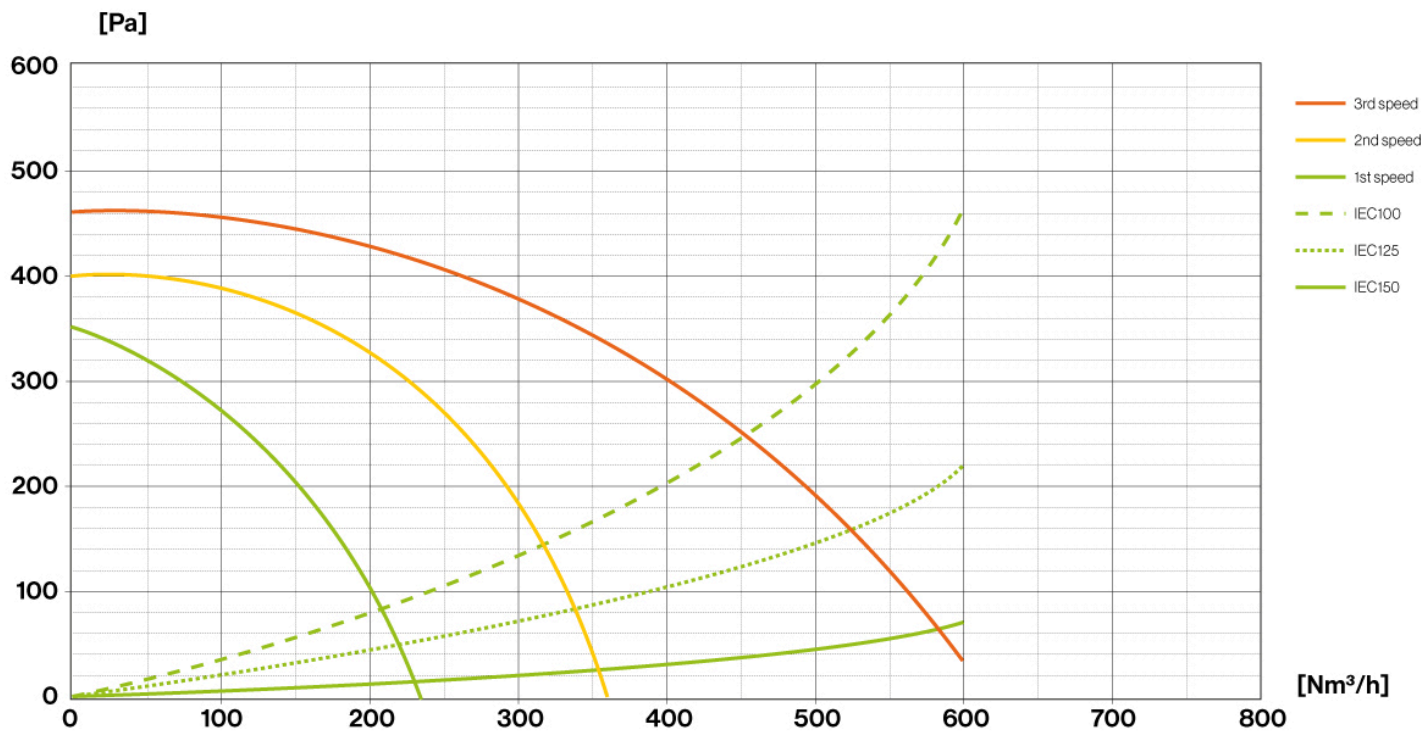


VIRGOLA

Evolution - Integroitu 60 cm -
Inox - 600 m3/h

Design

8034122363448

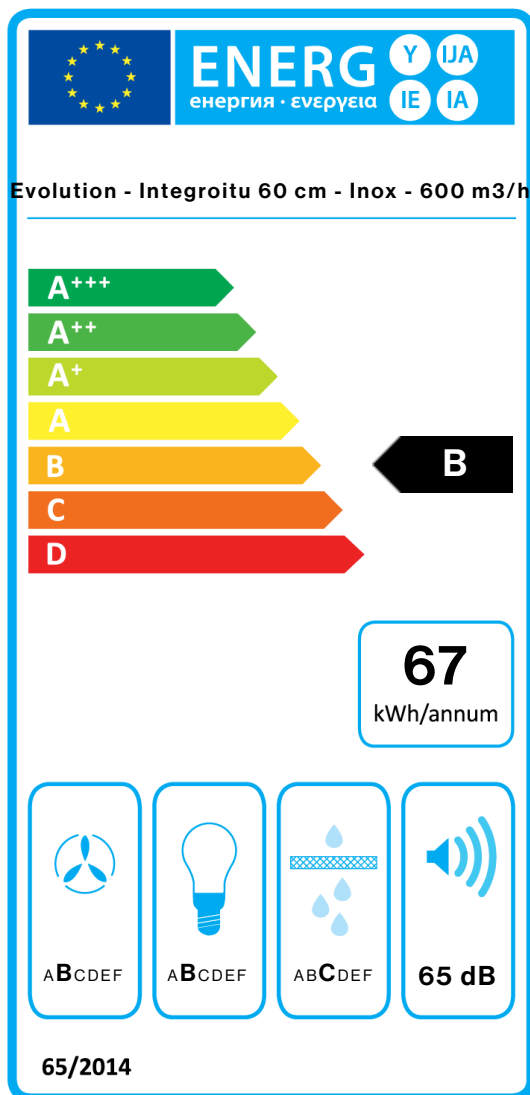

PF		
S	Falmec Spa	
M	Evolution - Integroitu 60 cm - Inox - 600 m3/h	
AEC	67,4	kWh/a
EEC	B	
FDE	23,2	
FDEC	B	
LE	27,9	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	240,0	m ³ /h
Qmax	580,0	m ³ /h
Qboost	580,0	m ³ /h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1,2	
EEL	68,8	
Qbep	360,0	m ³ /h
Pbep	337	Pa
Qboost	580,0	m ³ /h
Wbep	145,0	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.