

VIRGOLA EVOLUTION

Version

Evolution - Built-in 90 cm - Inox
- 600 m³/h

Collection

Design

EAN code

8034122363561



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Tempered turning glass
Electronic control
Metallic grease filter,
removable and washable
Optional charcoal filter
Possible to duct wall mounted
from rear
Dynamic LED Light (2700K -
5600K)

OPTIONAL ACCESSORIES

KACL.107
Glass shelf 90 cm
KACL.960
Charcoal filter
KACL.961
Charcoal and Zeolite filter
KCVJN.00#3
Telescopic chimney h 185 + h 185
KCVJN.01#3
Chimney h 120 mm

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
90 cm
Finishing
Scotch brite stainless steel
Motor
600 m³/h
Type of control
Electronic control
Lighting
Led 2x1,2 W - 2700 K / 5600 K
Filter
Metallic filter "Base" - 204x207
mm
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES


Gross weight
14 kg
Net weight
10.9 kg
Volumes
0.19 m³
Packaging size
Length
995 mm
Height
410 mm
Depth
465 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
230 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
580 m³/h
I.E.C. 61591
Maximum noise level
65 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
480 Pa
Max. motor power
200 W
ENERGY CLASS
B



VIRGOLA EVOLUTION

Version

Evolution - Built-in 90 cm - Inox
- 600 m³/h

Collection

Design


EAN code

8034122363561

MOTOR TECHNICAL SHEET

| Motor speed | 1 | 2 | 3 |
|---|-----|-----|-----|
| Noise level dB(A)re1pW-I.E.C.60704-2-13 | 47 | 56 | 65 |
| Capacity (m ³ /h) I.E.C.61591 | 240 | 350 | 580 |
| Maximum pressure (Pa) | 250 | 400 | 480 |
| Motor Power (W) | 130 | 160 | 200 |
| Air outlet | 150 | 150 | 150 |

CAPACITY / PRESSURE

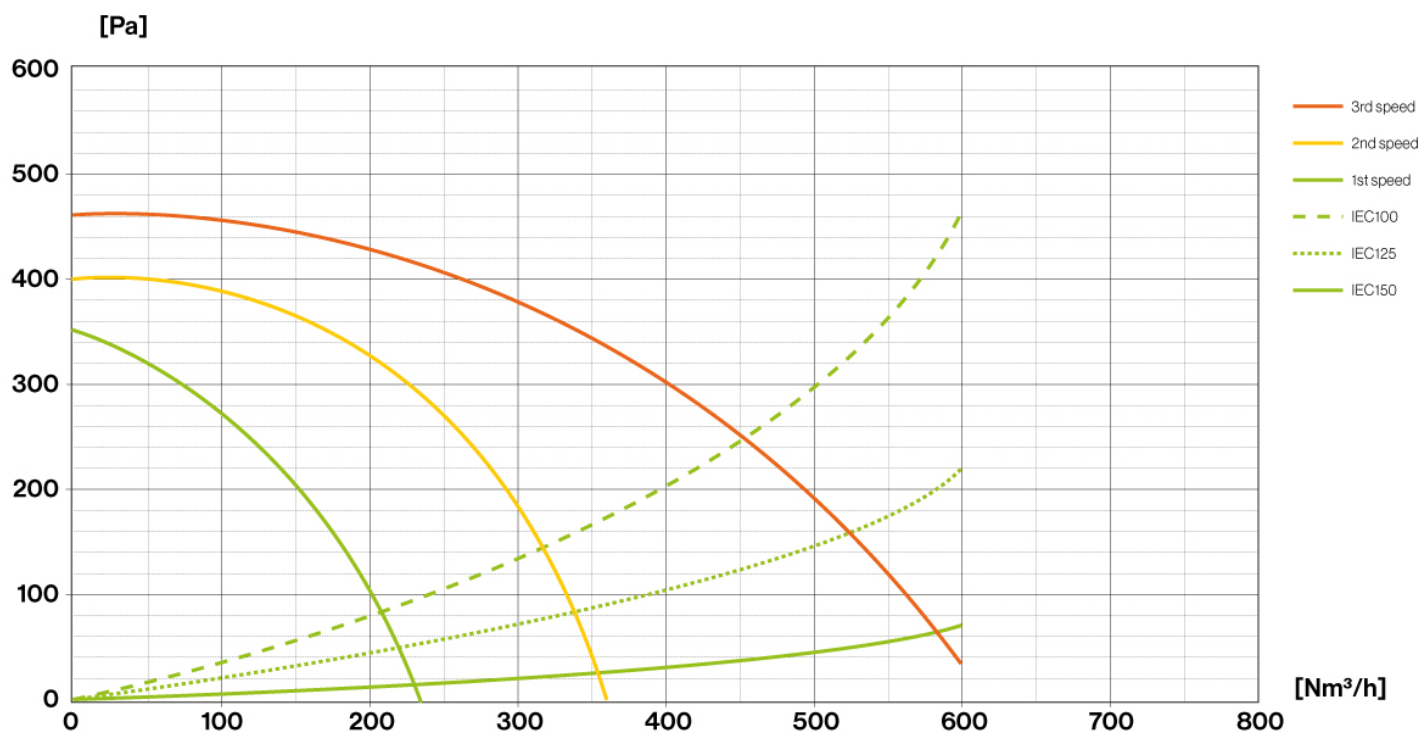

VIRGOLA EVOLUTION

Version

Evolution - Built-in 90 cm - Inox
- 600 m³/h


Collection

Design

EAN code

8034122363561

ENERGY LABEL

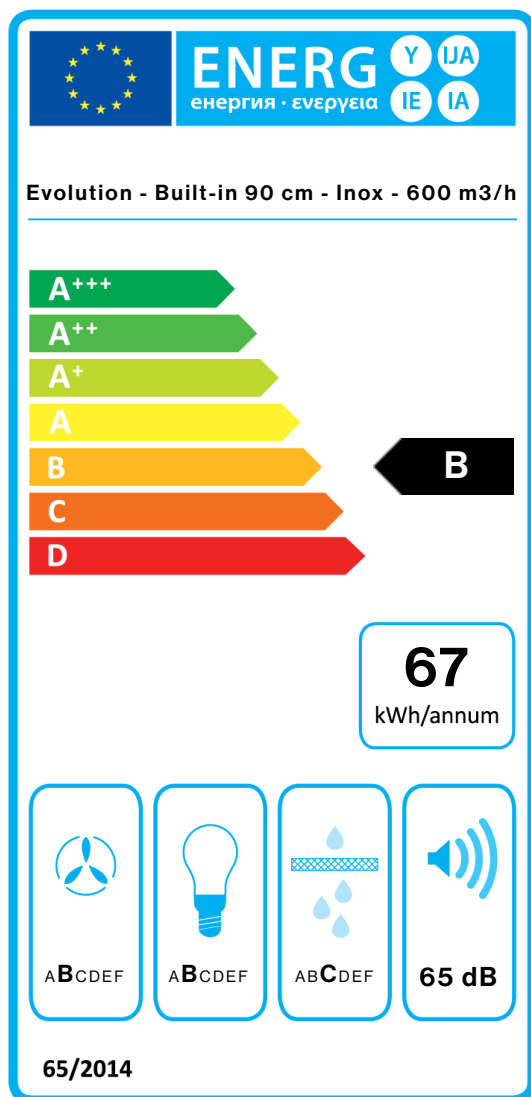

| PF | | |
|------------|---|-------------------|
| S | Falmec Spa | |
| M | Evolution - Built-in 90 cm - Inox - 600 m ³ /h | |
| AEC | 67,4 | kWh/a |
| EEC | B | |
| FDE | 23,2 | |
| FDEC | B | |
| LE | 27,9 | |
| LEC | B | |
| GFE | 80,0 | |
| GFEC | C | |
| Qmin | 240,0 | m ³ /h |
| Qmax | 580,0 | m ³ /h |
| Qboost | 580,0 | m ³ /h |
| SPEmin | 47 | dBa |
| SPEmax | 65 | dBa |
| SPEboost | - | dBa |
| PO | - | W |
| PS | 0,48 | W |
| PI | | |
| F | 1,2 | |
| EEL | 68,8 | |
| Qbep | 360,0 | m ³ /h |
| Pbep | 337 | Pa |
| Qboost | 580,0 | m ³ /h |
| Wbep | 145,0 | W |
| WL | 5,30 | W |
| Emiddle | 148 | lx |
| Lwa-SPEmax | 65 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.