

## POLAR X

### Version

Island 35 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122363196



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Electronic control**

**LED lighting**

**Metallic grease filter,  
removable and washable**

**Charcoal filter included**

## OPTIONAL ACCESSORIES

**103050091**

Round charcoal filter Ø170 mm -  
Type 6

## TECHNICAL FEATURES

**Installation type**

Island

**Dimensions**

35 cm

**Finishing**

Scotch brite stainless steel (AISI  
304)

**Motor**

800 m<sup>3</sup>/h

**Type of control**

Electronic control

**Lighting**

Led 3x1,2 W - 3200 K

**Charcoal filter**

Round charcoal filter Ø170 mm -  
Type 6 (optional)

**Minimum distance**

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

**Gross weight**

24.8 kg

**Net weight**

20.8 kg

**Volumes**

0.3 m<sup>3</sup>

**Packaging size**

Length

995 mm

Height

500 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

**Maximum consumption**

280 W

**Voltage**

220-240V

**Frequency**

50-60Hz

## MOTOR TECHNICAL SHEET

**Maximum capacity**

710 m<sup>3</sup>/h

I.E.C. 61591

**Maximum noise level**

67 dB(A)re1pW

I.E.C.60704-2-13

**Maximum pressure (Pa)**



500 Pa

**Max. motor power**

215 W

**ENERGY CLASS**

B



## POLAR X

### Version

Island 35 cm - 800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122363196

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	48	54	61	67
Capacity (m <sup>3</sup> /h) I.E.C.61591	290	380	490	710
Maximum pressure (Pa)	400	450	480	500
Motor Power (W)	134	156	180	215
Air outlet	150	150	150	150

## CAPACITY / PRESSURE



## POLAR X

### Version

Island 35 cm - 800 m3/h


### Collection

Design

### EAN code

8034122363196

## ENERGY LABEL

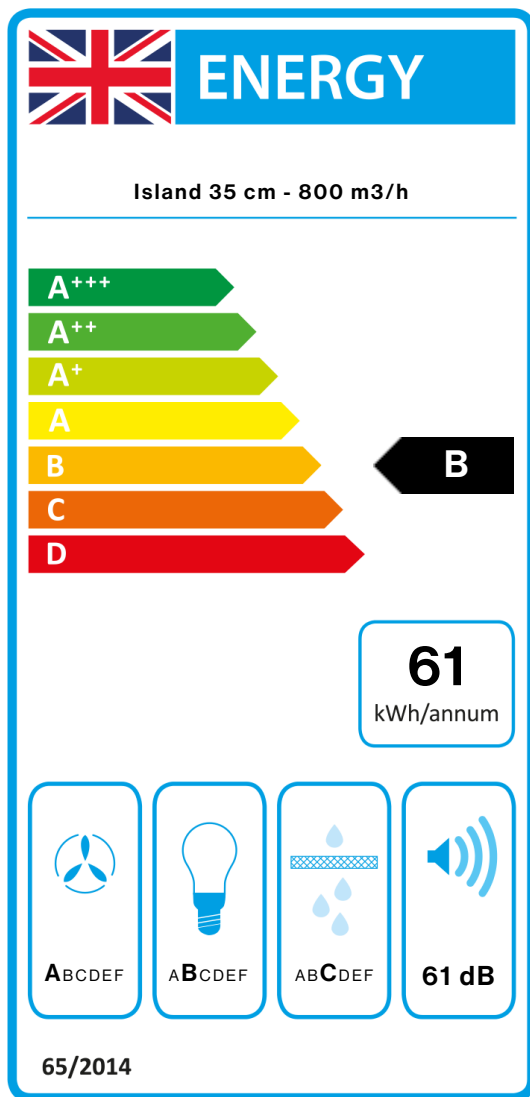

PF		
S	Falmec Spa	
M	Island 35 cm - 800 m3/h	
AEC	61,4	kWh/a
EEC	B	
FDE	28,1	
FDEC	A	
LE	24,2	
LEC	B	
GFE	76,0	
GFEC	C	
Qmin	290,0	m <sup>3</sup> /h
Qmax	490,0	m <sup>3</sup> /h
Qboost	710,0	m <sup>3</sup> /h
SPEmin	48	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	59,6	
Qbep	371,0	m <sup>3</sup> /h
Pbep	412	Pa
Qboost	710,0	m <sup>3</sup> /h
Wbep	151,0	W
WL	8,60	W
Emiddle	208	lex
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.