

MIMOSA

Version

Wall - 60 cm - walnut white -
600 m³/h

Collection

Classic

EAN code

8034122477770

FEATURES

Slider

LED lighting

Metallic grease filter,
removable and washable

Charcoal filter included

OPTIONAL ACCESSORIES

103050102

Round charcoal filter Ø212 mm -
Type 2

TECHNICAL FEATURES

Installation type

Wall

Dimensions

60 cm

Finishing

Painted white geffered steel

Motor

600 m³/h

Type of control

Slider

Lighting

Led 2x2 W (2700 K)

Charcoal filter

Round charcoal filter Ø212 mm -
Type 2 (included)

Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

18 kg

Net weight

15 kg

Volumes

0.28 m³

Packaging size

Length

710 mm

Height

660 mm

Depth

595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

230 W

Voltage

220-240V

Frequency

50-60Hz

ENERGY CLASS

C

MIMOSA

Version

Wall - 60 cm - walnut white -
600 m³/h


Collection

Classic

EAN code

8034122477770

ENERGY LABEL

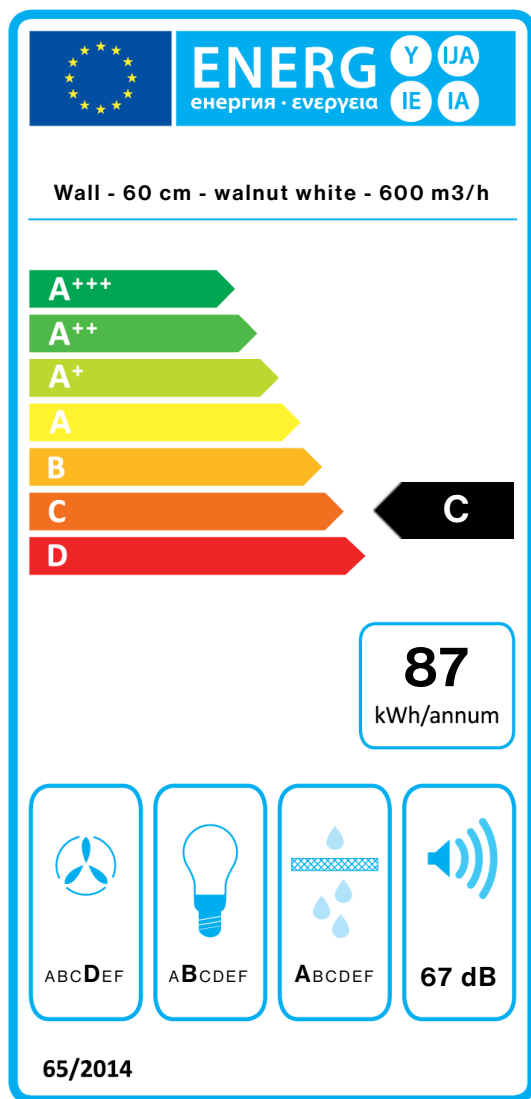

PF		
S	Falmec Spa	
M	Wall - 60 cm - walnut white - 600 m ³ /h	
AEC	87,1	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	25,5	
LEC	B	
GFE	96,0	
GFEC	A	
Qmin	220,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	480,0	m ³ /h
SPEmin	49	dBa
SPEmax	67	dBa
SPEboost	-	dBa
PO	-	W
PS	0,00	W
PI		
F	1.4	
EEL	80,6	
Qbep	303,0	m ³ /h
Pbep	308	Pa
Qboost	480,0	m ³ /h
Wbep	164,0	W
WL	4,50	W
Emiddle	121	lex
Lwa-SPEmax	67	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.