

## GRUPPO INCASSO

### Versiune

Incorporat 50 cm - 600 m<sup>3</sup>/h

### Colectie

Design

### Cod EAN

8034122342696

## CARACTERISTICI

**Inox AISI 304 Scotch Brite**  
**Aspiratie perimetrala**  
**Control electronic**  
**Filtru de grasime metalic, detasabil si lavabil**  
**Filtru de carbon inclus**  
**Telecomanda inclusa**  
**Dynamic LED Light (2700K - 5600K)**

## ACCESORII OPTIONALE

### KACL.815

Lavete pentru curatare inox (cutie 10 buc)

### 105080053

Telecomanda

## CARACTERISTICI TEHNICE

### Tip de instalare

Incorporata

### Dimensiuni

50 cm

### Finisaj

Inox Scotch Brite (AISI 304)

### Motor

600 m<sup>3</sup>/h

### Tipul panoului de control

Control electronic

### Setari de viteza

3

### Iluminare

Led 2x1,2 W - 2700 K / 5600 K

### Filtru

Filtru metalic "Base" - 204x207 mm

### Filtru de Carbon

Filtru de carbon rotund Ø212 mm - Tip 2 (optional)

### Distanta minima

Plita cu gaz: 62 cm

Plita electrica: 52 cm

## AMBALARE: GREUTATE SI VOLUM

### Greutate bruta

9.5 kg

### Greutate neta

7.6 kg

### Volum

0.09 m<sup>3</sup>

### Dimensiuni ambalaj

Lungime

610 mm

Inaltime

380 mm

Adancime

375 mm

## CARACTERISTICI CONSUM SI CONEXIUNE

### Consum maxim

230 W

### Curent

220-240V

### Frecventa

50-60Hz

### Tip stecher

Shuko

## FISA TEHNICA MOTOR

### Capacitate maxima

480 m<sup>3</sup>/h

I.E.C. 61591

### Nivel de zgomot maxim

65 dB(A)re1pW

I.E.C.60704-2-13

### Presiune maxima (Pa)


500 Pa

### Putere maxima motor

180 W

## CLASA DE ENERGIE

C



## GRUPPO INCASSO

### Versiune

Incorporat 50 cm - 600 m<sup>3</sup>/h

### Colectie

Design


### Cod EAN

8034122342696

## FISA TEHNICA MOTOR

Viteza motorului	1	2	3
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacitate (m <sup>3</sup> /h) I.E.C.61591	220	320	480
Presiune maxima (Pa)	270	400	500
Putere motor (W)	100	130	180
Evacuare aer	120	120	120

## CAPACITATE/ PRESIUNE

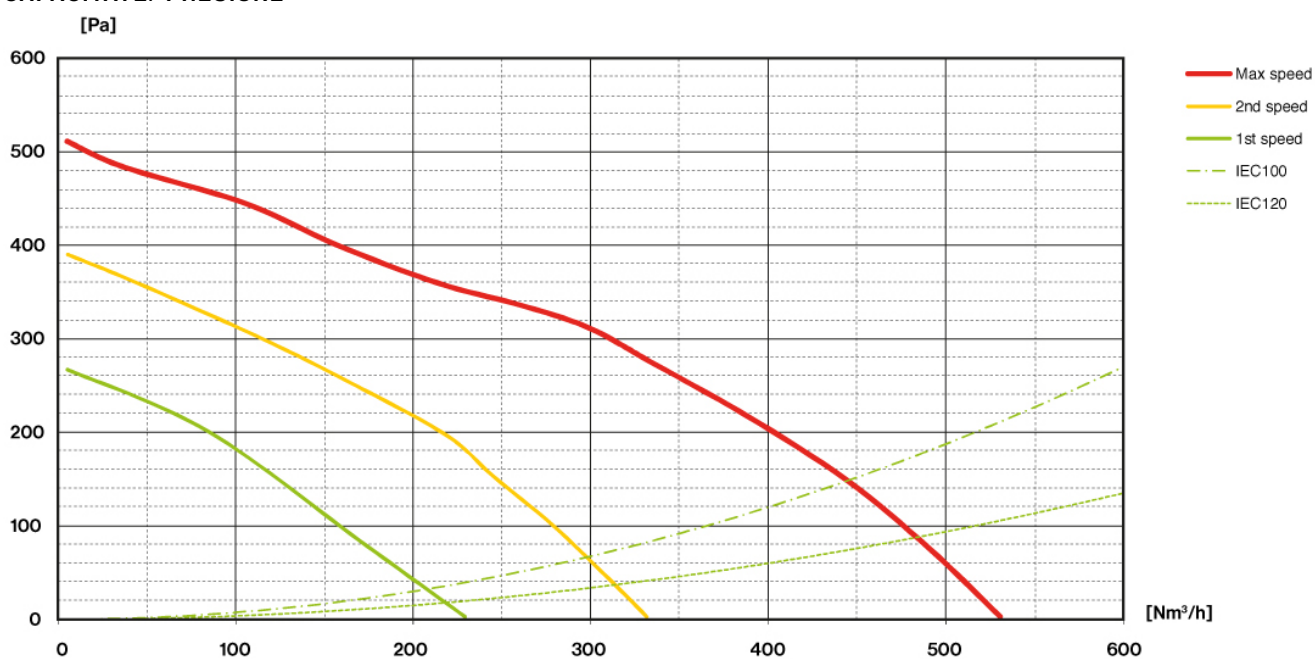

## GRUPPO INCASSO

### Versiune

Incorporat 50 cm - 600 m3/h


### Colectie

Design

### Cod EAN

8034122342696

## ETICHETA DE ENERGIE

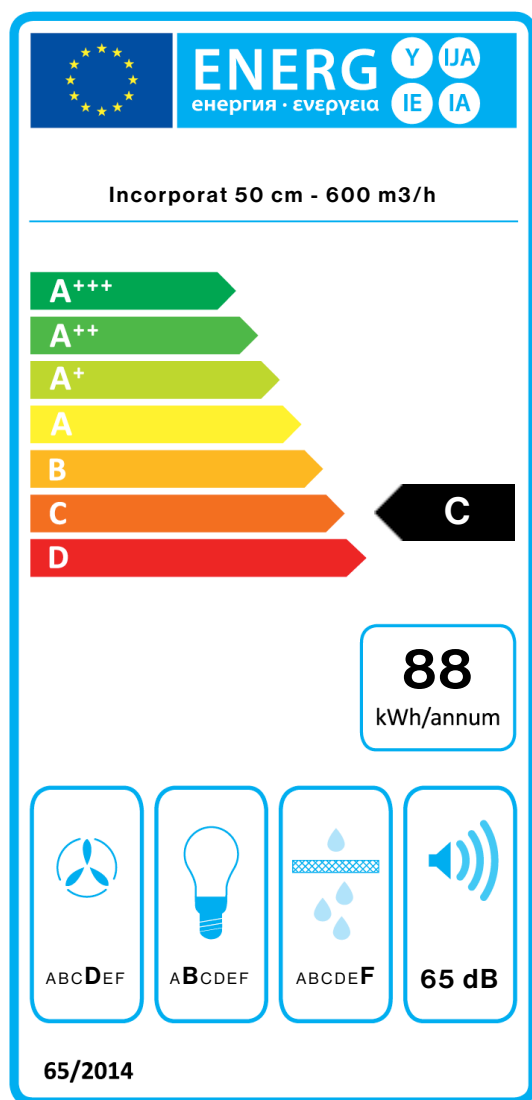

PF		
S	Falmec Spa	
M	Incorporat 50 cm - 600 m3/h	
AEC	87,7	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	220,0	m <sup>3</sup> /h
Qmax	480,0	m <sup>3</sup> /h
Qboost	480,0	m <sup>3</sup> /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1,4	
EEl	80,9	
Qbep	303,0	m <sup>3</sup> /h
Pbep	308	Pa
Qboost	480,0	m <sup>3</sup> /h
Wbep	164,0	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	65	dBa