

RIALTO

Version

Wall 55 cm - Inox - 800 m3/h - h100 cm

Collection

Design

EAN code

8034122363998




The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- LED ambient light
- LED lighting
- Top filter, removable and washable
- Charcoal filter included


OPTIONAL ACCESSORIES

- KACL.782#49F**
Slim motor 800 m3/h
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- 101080202**
Metallic filter "Top" - 235x245 mm
- 103050091**
Round charcoal filter Ø170 mm - Type 6



TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
55 cm
- Finishing**
Scotch brite stainless steel (AISI 304)
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 2x1,2 W - 3200 K
- Metallic filter "Top" - 279x139 mm
- Filter**
Metallic filter "Top" - 235x245 mm
- Charcoal filter**
Round charcoal filter Ø170 mm - Type 6 (included)
- Minimum distance**
Gas hob: 52 cm
Electric hob: 50 cm



PACKAGING:WEIGHTS AND VOLUMES

- Gross weight**
29 kg
- Net weight**
23 kg
- Volumes**
0.36 m³
- Packaging size**
Length 1090 mm
Height 520 mm
Depth 630 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption**
280 W
- Voltage**
220-240V
- Frequency**
50-60Hz

MOTOR TECHNICAL SHEET

- Maximum capacity**
720 m³/h
I.E.C. 61591
- Maximum noise level**
67 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
520 Pa
- Max. motor power**
228 W
- ENERGY CLASS**
B

RIALTO

Version
Wall 55 cm - Inox - 800 m3/h -
h100 cm


Collection
Design

EAN code
8034122363998

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	49	54	59	67
Capacity (m3/h) I.E.C.61591	280	370	480	720
Maximum pressure (Pa)	400	450	480	520
Motor Power (W)	134	156	180	228
Air outlet	150	150	150	150

CAPACITY / PRESSURE

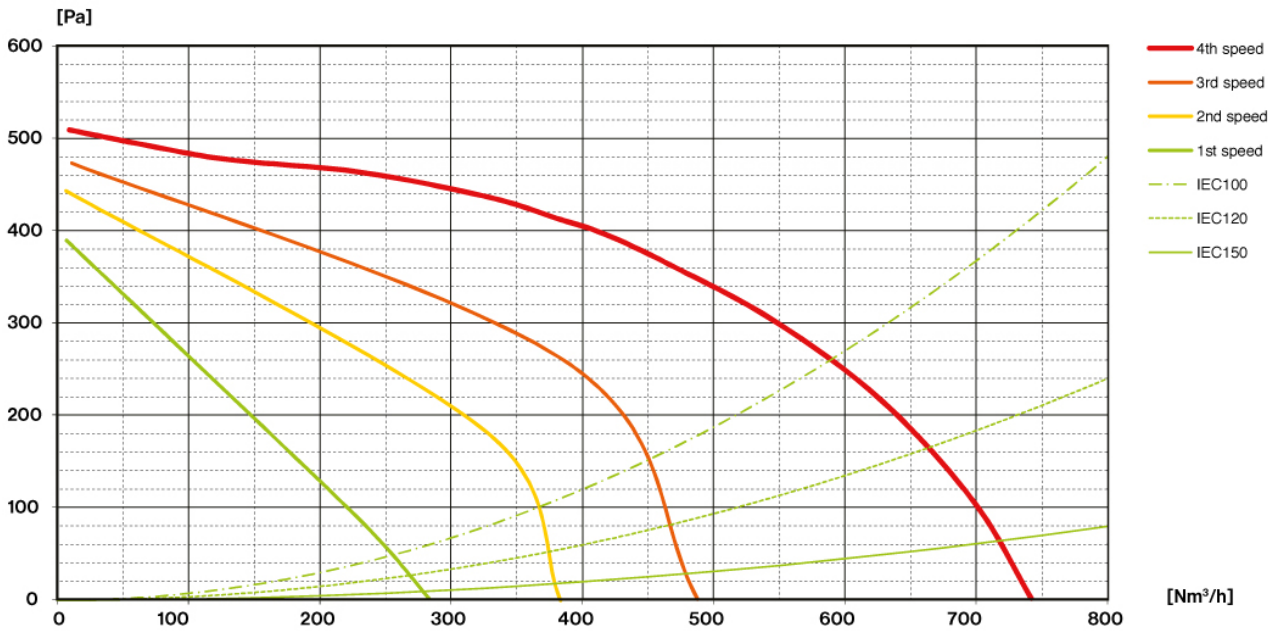


RIALTO

Version
Wall 55 cm - Inox - 800 m3/h -
h100 cm

Collection
Design

EAN code
8034122363998

ENERGY LABEL

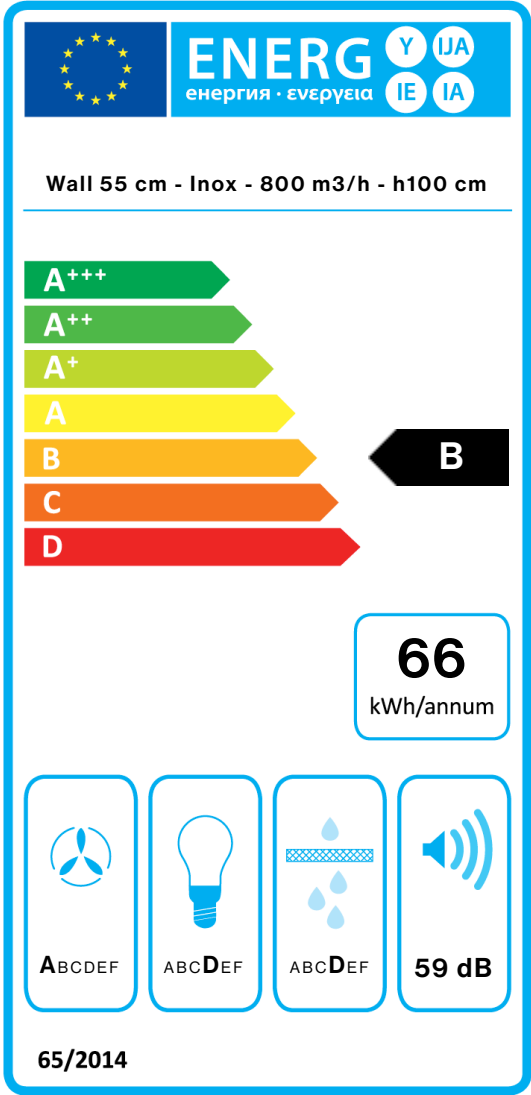

PF		
S	Falmec Spa	
M	Wall 55 cm - Inox - 800 m3/h - h100 cm	
AEC	65,5	kWh/a
EEC	B	
FDE	28,2	
FDEC	A	
LE	12,1	
LEC	D	
GFE	70,0	
GFEC	D	
Qmin	280,0	m³/h
Qmax	480,0	m³/h
Qboost	720,0	m³/h
SPEmin	49	dBa
SPEmax	59	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	59,8	
Qbep	417,0	m³/h
Pbep	397	Pa
Qboost	720,0	m³/h
Wbep	163,0	W
WL	8,20	W
Emiddle	99	lex
Lwa-SPEmax	59	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.