

## MIRA

### Version

Wall 40 cm - Inox - 800 m3/h

### Collection

Design

### EAN code

8034122206004



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Perimeter suction**

**Electronic control**

**LED lighting**

**Metallic grease filter,  
removable and washable**

**Charcoal filter included**

Charcoal filter 103050107 Type  
3 until 12.20.2021

## OPTIONAL ACCESSORIES

### KACL.770#41F

Remote under-roof 1100 m3/h  
Brushless

### KACL.786#41F

Outdoor extractor fan 1000  
m3/h

### KACL.796#4AF

Outdoor extractor fan 1500 m3/h

### KACL.797#4AF

Remote under-roof motor 1300  
m3/h

### KACL.798#41F

Remote under-roof motor 950  
m3/h

### 101080244

Metallic filter "Base" - 277x294  
mm

### 103050091

Round charcoal filter Ø170 mm -  
Type 6

### 103050107

Square charcoal filter - Type 3

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

40 cm

### Finishing

Scotch brite stainless steel (AISI  
304)

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

### Filter

Metallic filter "Base" - 277x294  
mm

### Charcoal filter

Round charcoal filter Ø170 mm -  
Type 6 (included)

### Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

20 kg

### Net weight

16 kg

### Volumes

0.28 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

480 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

## MOTOR TECHNICAL SHEET

### Maximum capacity

590 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

64 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


500 Pa

### Max. motor power

203 W

## ENERGY CLASS

B



## MIRA

### Version

Wall 40 cm - Inox - 800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122206004

## MOTOR TECHNICAL SHEET

| Motor speed  | 1   | 2   | 3   | 4   |
|--|-----|-----|-----|-----|
| Noise level<br>dB(A) <sub>re1pW-I.E.C.60704-2-13</sub> | 45  | 50  | 55  | 64  |
| Capacity (m <sup>3</sup> /h)<br>I.E.C.61591            | 230 | 300 | 380 | 590 |
| Maximum pressure (Pa)                                  | 390 | 420 | 460 | 500 |
| Motor Power (W)  | 134 | 156 | 180 | 203 |
| Air outlet   | 150 | 150 | 150 | 150 |

## CAPACITY / PRESSURE

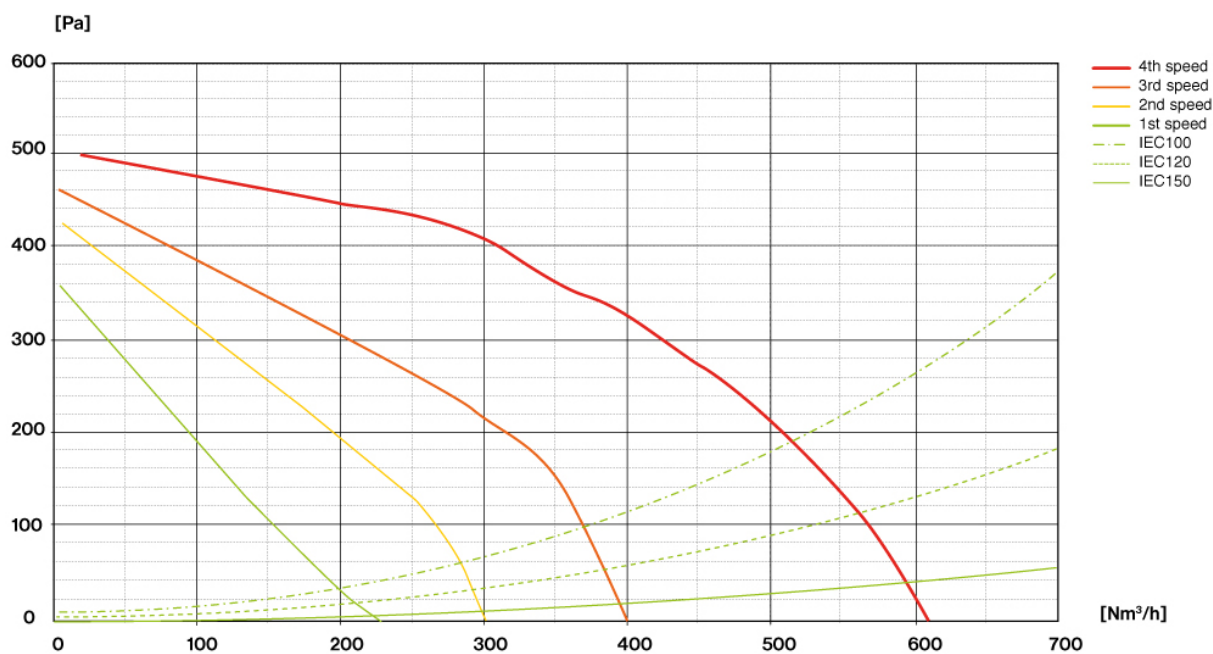

## MIRA

### Version

Wall 40 cm - Inox - 800 m3/h


### Collection

Design

### EAN code

8034122206004

## ENERGY LABEL

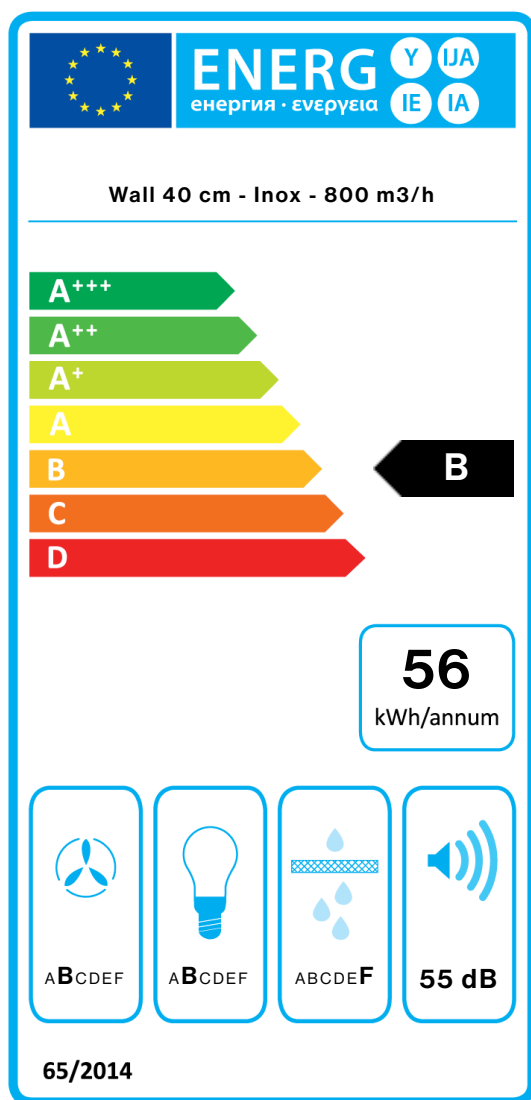

| PF         |                              |                   |
|------------|------------------------------|-------------------|
| S          | Falmec Spa                   |                   |
| M          | Wall 40 cm - Inox - 800 m3/h |                   |
| AEC        | 55,7                         | kWh/a             |
| EEC        | B                            |                   |
| FDE        | 25,6                         |                   |
| FDEC       | B                            |                   |
| LE         | 20,5                         |                   |
| LEC        | B                            |                   |
| GFE        | 53,0                         |                   |
| GFEC       | F                            |                   |
| Qmin       | 230,0                        | m <sup>3</sup> /h |
| Qmax       | 380,0                        | m <sup>3</sup> /h |
| Qboost     | 590,0                        | m <sup>3</sup> /h |
| SPEmin     | 45                           | dBa               |
| SPEmax     | 55                           | dBa               |
| SPEboost   | 64                           | dBa               |
| PO         | -                            | W                 |
| PS         | 0,48                         | W                 |
| PI         |                              |                   |
| F          | 1,1                          |                   |
| EEL        | 62,4                         |                   |
| Qbep       | 287,0                        | m <sup>3</sup> /h |
| Pbep       | 415                          | Pa                |
| Qboost     | 590,0                        | m <sup>3</sup> /h |
| Wbep       | 129,0                        | W                 |
| WL         | 5,30                         | W                 |
| Emiddle    | 109                          | lx                |
| Lwa-SPEmax | 55                           | dBa               |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEL\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.