

## MIRA

### Version

Wall telescopic 40 cm - Inox -  
800 m<sup>3</sup>/h

### Collection

Design

### EAN code

8034122205793



*The photograph is purely for information  
It may not correspond to the selected version.*

## FEATURES

**Perimeter suction**

**Electronic control**

**LED lighting**

**Metallic grease filter,  
removable and washable**

**Charcoal filter included**

## OPTIONAL ACCESSORIES

### **KACL.770#41F**

Remote under-roof 1100 m<sup>3</sup>/h  
Brushless

### **KACL.786#41F**

Outdoor extractor fan 1000  
m<sup>3</sup>/h

### **KACL.796#4AF**

Outdoor extractor fan 1500 m<sup>3</sup>/h

### **KACL.797#4AF**

Remote under-roof motor 1300  
m<sup>3</sup>/h

### **KACL.798#41F**

Remote under-roof motor 950  
m<sup>3</sup>/h

### **101080244**

Metallic filter "Base" - 277x294  
mm

### **103050107**

Square charcoal filter - Type 3

## TECHNICAL FEATURES

### Installation type

Wall

### Dimensions

40 cm

### Finishing

Scotch brite stainless steel (AISI  
304)

### Motor

800 m<sup>3</sup>/h

### Type of control

Mechanical control

### Speed settings

4

### Lighting

Led 2x1,2 W - 3200 K

### Filter

Metallic filter "Base" - 277x294  
mm

### Charcoal filter

Square charcoal filter - Type 3  
(included)

### Minimum distance

Gas hob: 60 cm

Electric hob: 25 cm

## PACKAGING:WEIGHTS AND VOLUMES

### Gross weight

23 kg

### Net weight

19 kg

### Volumes

0.28 m<sup>3</sup>

### Packaging size

Length

995 mm

Height

480 mm

Depth

595 mm

## CONSUMPTION AND CONNECTION FEATURES

### Maximum consumption

280 W

### Voltage

220-240V

### Frequency

50-60Hz

## MOTOR TECHNICAL SHEET

### Maximum capacity

590 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

64 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


500 Pa

### Max. motor power

203 W

## ENERGY CLASS

B



## MIRA

### Version

Wall telescopic 40 cm - Inox -  
800 m<sup>3</sup>/h

### Collection

Design


### EAN code

8034122205793

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	45	50	55	64
Capacity (m <sup>3</sup> /h) I.E.C.61591	230	300	380	590
Maximum pressure (Pa)	390	420	460	500
Motor Power (W)	134	156	180	203
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

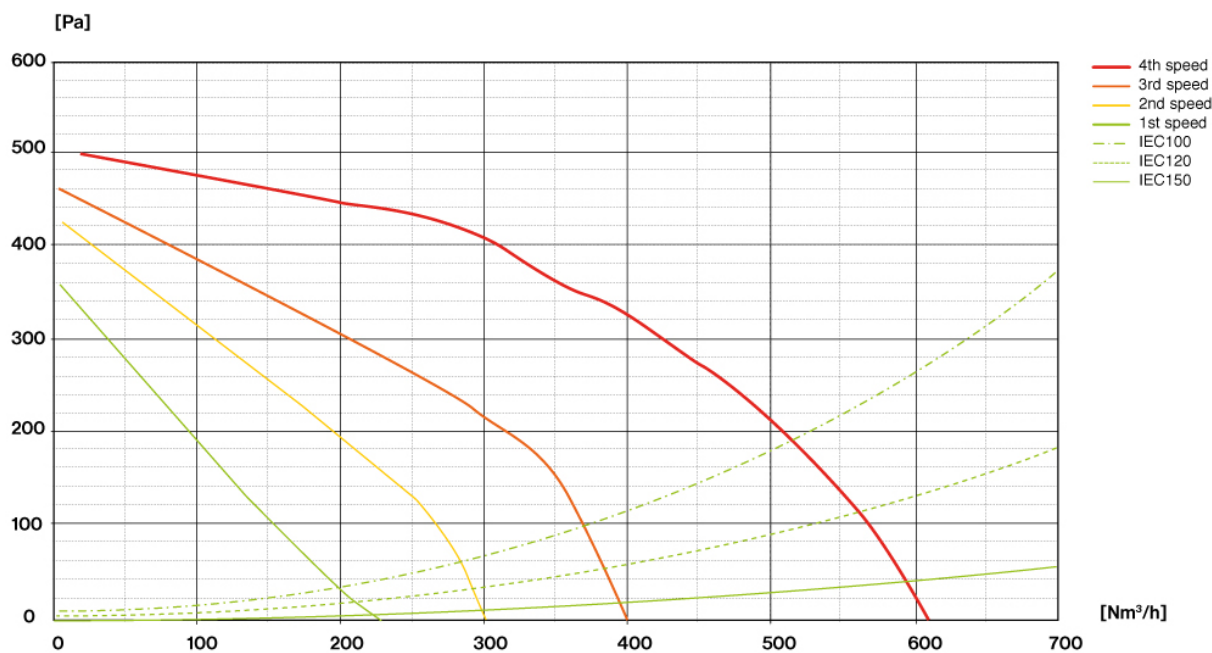

## MIRA

### Version

Wall telescopic 40 cm - Inox -  
800 m<sup>3</sup>/h


### Collection

Design

### EAN code

8034122205793

## ENERGY LABEL

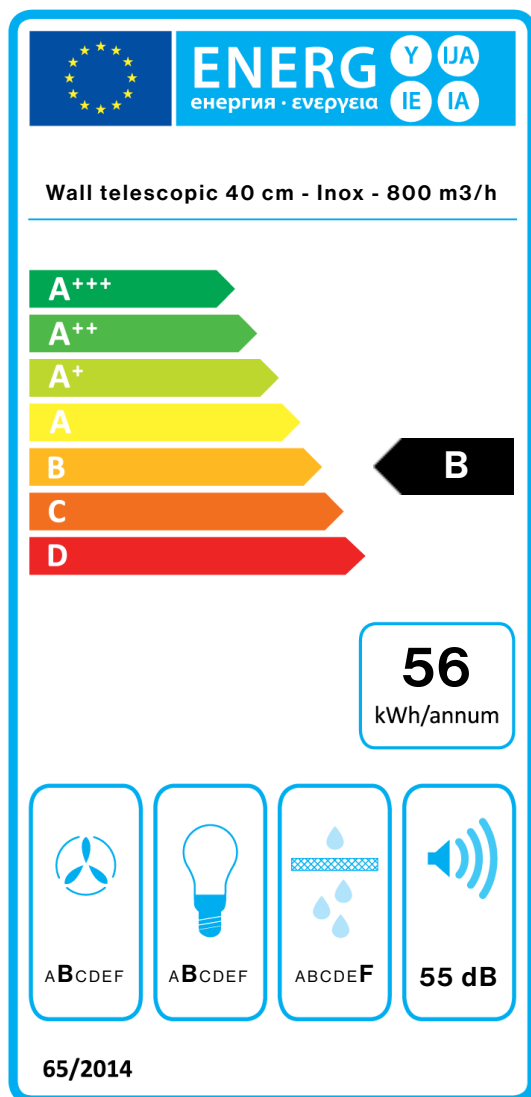

PF		
S	Falmec Spa	
M	Wall telescopic 40 cm - Inox - 800 m <sup>3</sup> /h	
AEC	55,7	kWh/a
EEC	B	
FDE	25,6	
FDEC	B	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	230,0	m <sup>3</sup> /h
Qmax	380,0	m <sup>3</sup> /h
Qboost	590,0	m <sup>3</sup> /h
SPEmin	45	dBa
SPEmax	55	dBa
SPEboost	64	dBa
PO	-	W
PS	0,48	W
PI		
F	1.1	
EEl	62,4	
Qbep	287,0	m <sup>3</sup> /h
Pbep	415	Pa
Qboost	590,0	m <sup>3</sup> /h
Wbep	129,0	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	55	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.