

COVER

Versiyon

Wall 85 cm - Terracotta clay -
600 m³/h

Koleksiyon

Design

EAN kodu

8034122363899



Fotoğraf tamamen bilgi amaçlıdır
Seçili versiyona ait olmayabilir.

ÖZELLİKLER

Elektronik kontrol
Çıkartılabilir ve yıkanabilir
Metal yağ filtresi
Opsiyonel uzaktan kumanda
Açılan ön kısım
Dinamik Led aydınlatma (2700K - 5600K)
Ultra slim body
Otomatik modlu diyalog sistemi
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPSİYONEL AKSESUARLAR

105080053

Uzaktan Kumanda

KACL.1039

Carbon.Zeo Microtech filter

KCCFN.00#N

Kit chimney Cover - Black

TEKNİK ÖZELLİKLER

Kurulum tipi
Duvar
Ölçüler
85 cm
Finişler
Materic finish - terracotta clay
Motor
600 m³/h
Kontrol tipi
Elektronik kontrol
Hız ayarı
3 + boost
Aydınlatma
Led 2x1,2 W - 2700 K / 5600 K
Filtre
Metal filter AISI - Cover 85
Minimum uzaklık
Gazlı ocak: 52 cm
Elektrikli ocak: 52 cm

PAKETLEME: AĞIRLIK VE HACİM




Brüt ağırlık
22.4 kg
Net ağırlık
18.2 kg
Hacimler
0.19 m³
Paketleme ölçüsü
Uzunluk
950 mm
Yükseklik
310 mm
Derinlik
655 mm

TÜKETİM VE BAĞLANTI ÖZELLİKLERİ

Maksimum tüketim
280 W
Akım
220-240V
Frekans
50-60Hz

MOTOR TEKNİK VERİLERİ

Maksimum kapasite
570 m³/h
I.E.C. 61591
Maksimum ses seviyesi
67 dB(A)re1pW
I.E.C.60704-2-13
Maksimum basınç (Pa)
740 Pa
Maksimum motor gücü
205 W
ENERJİ SINIFI
B



COVER

Versiyon

Wall 85 cm - Terracotta clay -
600 m3/h

Koleksiyon

Design


EAN kodu

8034122363899

MOTOR TEKNİK VERİLERİ

Motor hızı	1	2	3	4
Ses seviyesi dB(A)re1pW-I.E.C.60704-2-13	45	55	61	67
Kapasite (m3/h) I.E.C.61591	210	305	425	570
Maksimum basınç (Pa)	410	600	720	740
Gücü (W)	125	135	165	205
Hava çıkışı	150	150	150	150

KAPASİTE / BASINÇ

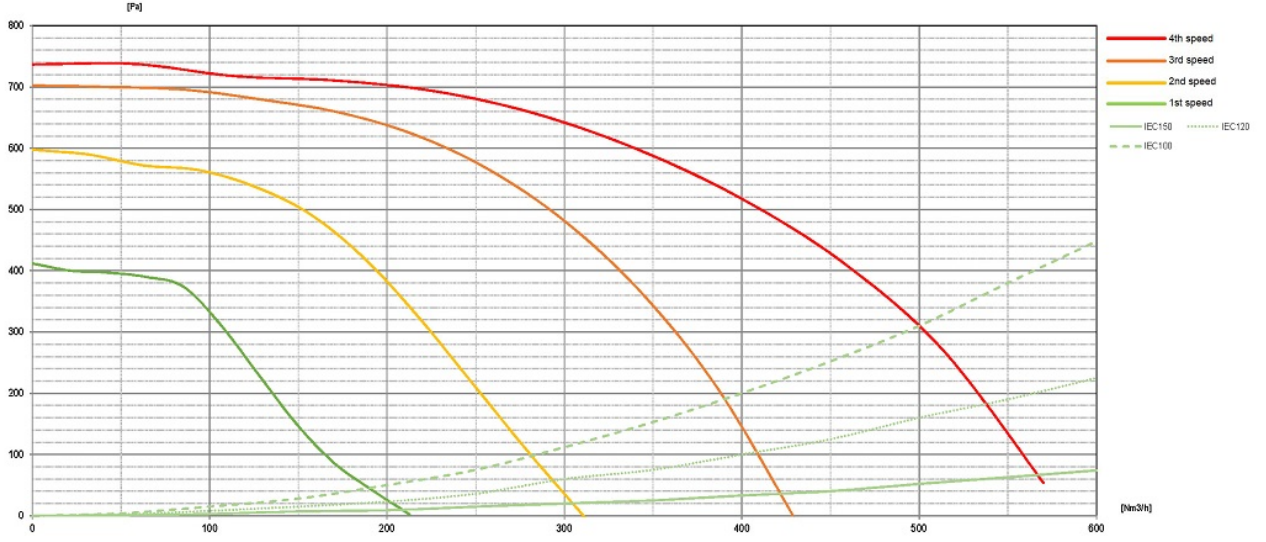

COVER

Versiyon

Wall 85 cm - Terracotta clay -
600 m³/h


Koleksiyon

Design

EAN kodu

8034122363899

ENERJİ ETİKETİ

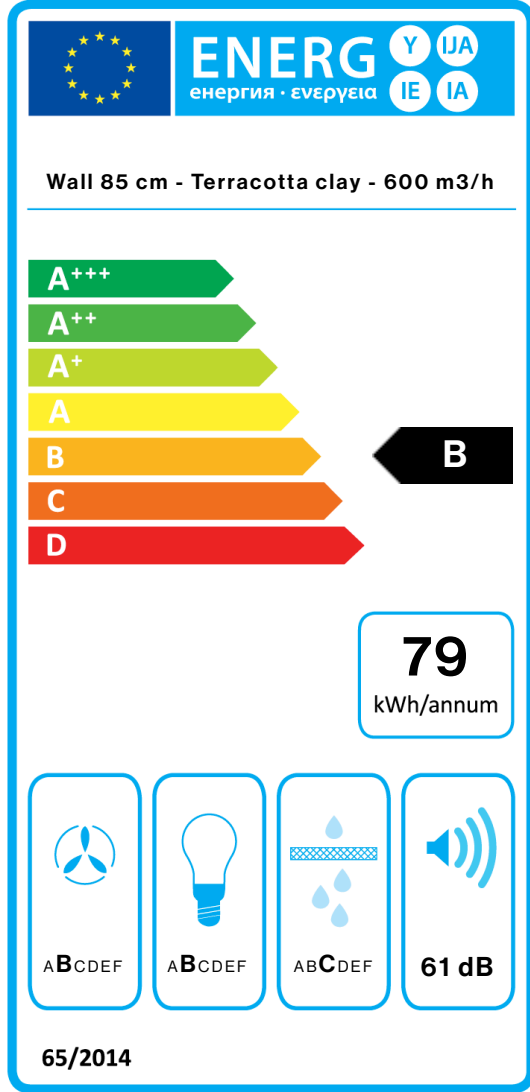

PF		
S	Falmec Spa	
M	Wall 85 cm - Terracotta clay - 600 m ³ /h	
AEC	78,7	kWh/a
EEC	B	
FDE	31,6	
FDEC	B	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	210,0	m ³ /h
Qmax	425,0	m ³ /h
Qboost	570,0	m ³ /h
SPEmin	45	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	60,1	
Qbep	353,0	m ³ /h
Pbep	584	Pa
Qboost	570,0	m ³ /h
Wbep	205,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	61	dBa

65/2014'e göre PF_Ürün fişi S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **66/2014'e göre PI_Ek bilgi** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.