

## COVER

Væg - 85 cm - Hvidt glas - 600 m<sup>3</sup>/h

## Sortiment

Design

## EAN Kode

8034122362823



Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

## FUNKTIONER

Elektronisk kontrolpanel  
Vaskbare rustfrie fedtfiltere  
Tilvalg fjernbetjening  
Frontåbning  
Dæmpbart LED-lys  
Dynamic LED Light (2700K - 5600K)  
Ultra slim body  
Mulighed for Connection kogeplade  
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter  
KACL.1039 for hoods produced  
from Sept. 2024

## MULIGHEDER FOR TILVALG

### 01-FJERN

Fjernbetjening med display

### KACL.1039

Carbon.Zeo Microtech filter

### KCCFN.00#B

Kit chimney Cover - White

## TEKNISK BESKRIVELSE

### Installation

Væg

### Dimensioner

85 cm

### Materiale

Hvidt tempereret glas

### Motor

600 m<sup>3</sup>/h

### Betjening

Elektronisk kontrolpanel

### Hastighed

3 + boost

### Belysning

Led 2x1,2 W - 2700 K / 5600 K

### Filter

Metal filter AISI - Cover 85

### Minimumsafstand

Gaskomfur: 52 cm

Kogeplade: 52 cm

## EMBALLAGE: VÆGT OG VOLUMEN

### Bruttovægt

22.4 kg

### Nettovægt

18.2 kg

### Volumen

0.19 m<sup>3</sup>

### Mål på emballage

Længde

950 mm

Højde

310 mm

Dybde

655 mm

## FORBRUG OG TILSLUTNINGSMULIGHEDER

### Maksimalt forbrug

280 W

### Spænding

220-240V

### Frekvens

50-60Hz

### DATABLAD MOTOR

#### Maksimal kapacitet

570 m<sup>3</sup>/h

I.E.C. 61591

#### Maksimalt støjniveau

67 dB(A)re1pW

I.E.C.60704-2-13

#### Maksimalt tryk (Pa)



740 Pa

#### Maksimal sugestyrke

205 W

#### ENERGIKLASSE

B



## COVER

Væg - 85 cm - Hvidt glas - 600  
m3/h

### Sortiment

Design


### EAN Kode

8034122362823

## DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	45	55	61	67
Kapacitet (m3/h) I.E.C.61591	210	305	425	570
Maksimalt tryk (Pa)	410	600	720	740
Forbrug (W)	125	135	165	205
Luftudtag	150	150	150	150

# KAPACITET / TRYK

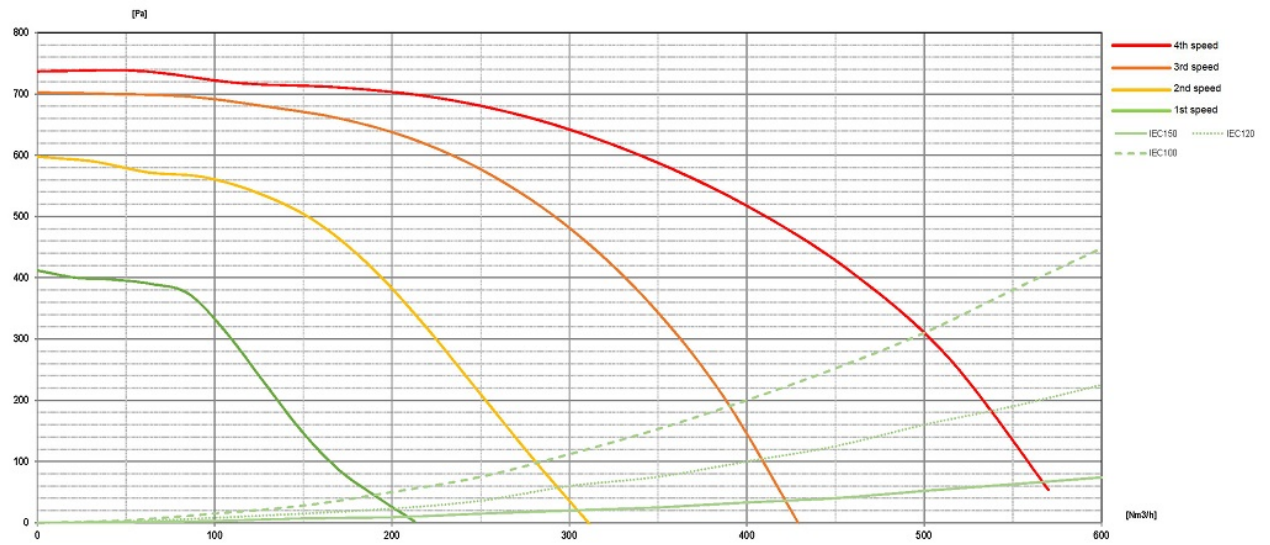

## COVER


Væg - 85 cm - Hvidt glas - 600  
m<sup>3</sup>/h

## Sortiment

Design

## EAN Kode

8034122362823

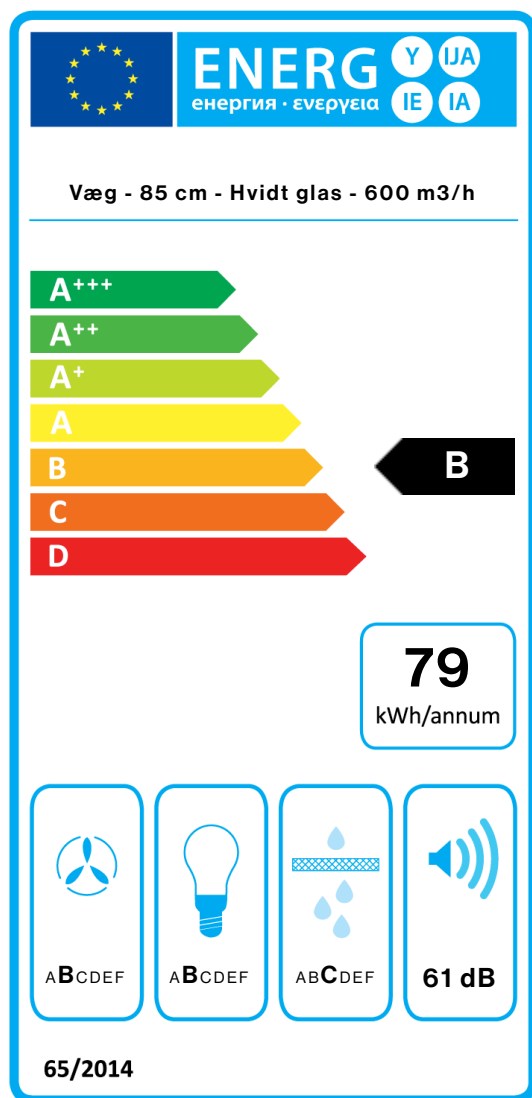

PF		
S	Falmec Spa	
M	Væg - 85 cm - Hvidt glas - 600 m <sup>3</sup> /h	
AEC	78,7	kWh/a
EEC	B	
FDE	31,6	
FDEC	B	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	210,0	m <sup>3</sup> /h
Qmax	425,0	m <sup>3</sup> /h
Qboost	570,0	m <sup>3</sup> /h
SPEmin	45	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEI	60,1	
Qbep	353,0	m <sup>3</sup> /h
Pbep	584	Pa
Qboost	570,0	m <sup>3</sup> /h
Wbep	205,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	61	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.