

COVER

Version

Cover, Mural 85 cm, E bardhë,
600 m³/h

Mbledhja

Design

Kodi EAN

8034122362823

KARAKTERISTIKAT GJENERIKE

Kontroll elektronik

Filtër metalik i çmontueshëm
dhe që mund të lahet

Telekomandë (opsional)

Panel me hapje të plotë

Ndriçim LED i zbehtë

Dynamic LED Light (2700K -
5600K)

Strukturë ultra e hollë

Sistemi i dialogut me automodë

Carbon.Zeo Microtech filter
(optional)

Availability Carbon.Zeo filter

KACL.1039 for hoods produced
from Sept. 2024


**NË DISPOZICION AKSESORË
OPSIONALË**

105080053

Telekomandë (opsionale)

KACL.1039

Carbon.Zeo Microtech filter



KARAKTERISTIKAT TEKNIKE

Instalimi

Mural

Përmasat e produktit

85 cm

Ngjyra

Xhami i temperuar i bardhë

Motor

600 m³/h

Paneli i kontrollit

Kontroll elektronik

Shpejtësia e funksionimit

3 + boost

Ndriçim

Led 2x1,2 W - 2700 K / 5600 K


Filtër

Metal filter

Distanca minimale

Pianurë me gaz: 52 cm

Pianurë elektrike: 52 cm



Imazh tregues i produktit

Mund të mos përputhet me versionin e zgjedhur

PAKETIM: PESHAT DHE VËLLIMET

Peshë bruto

22.4 kg

Pesha neto

18.2 kg

Vëllimi

0.19 m³

Paketim

Gjatësia

950 mm

Lartësia

310 mm

Thellesi

655 mm



Funksionet e lidhjes dhe konsumit

Konsumi maksimal

280 W

Tensioni

220-240V

Frekuenca

50-60Hz

KARAKTERISTIKAT TEKNIKE TË MOTORIT

Kapaciteti maksimale

570 m³/h

I.E.C. 61591

Zhurma maksimale

67 dB(A)re1pW

I.E.C.60704-2-13

Presioni maksimale

740 Pa

Fuqia maksimale e motorit

205 W

Klasit të energjisë

B

COVER

Version

Cover, Mural 85 cm, E bardhë,
600 m³/h

Mbledhja

Design


Kodi EAN

8034122362823

Karakteristikat teknike të motorit

Shpejtësia e motorit	1	2	3	4
Zhurma dB(A) _{re1pW-I.E.C.60704-2-13}	45	55	61	67
Kapaciteti (m ³ /h) I.E.C.61591	210	305	425	570
Presioni maksimale	410	600	720	740
Fuqia	125	135	165	205
Dalja e ajrit	150	150	150	150

Rrjedha e presionit

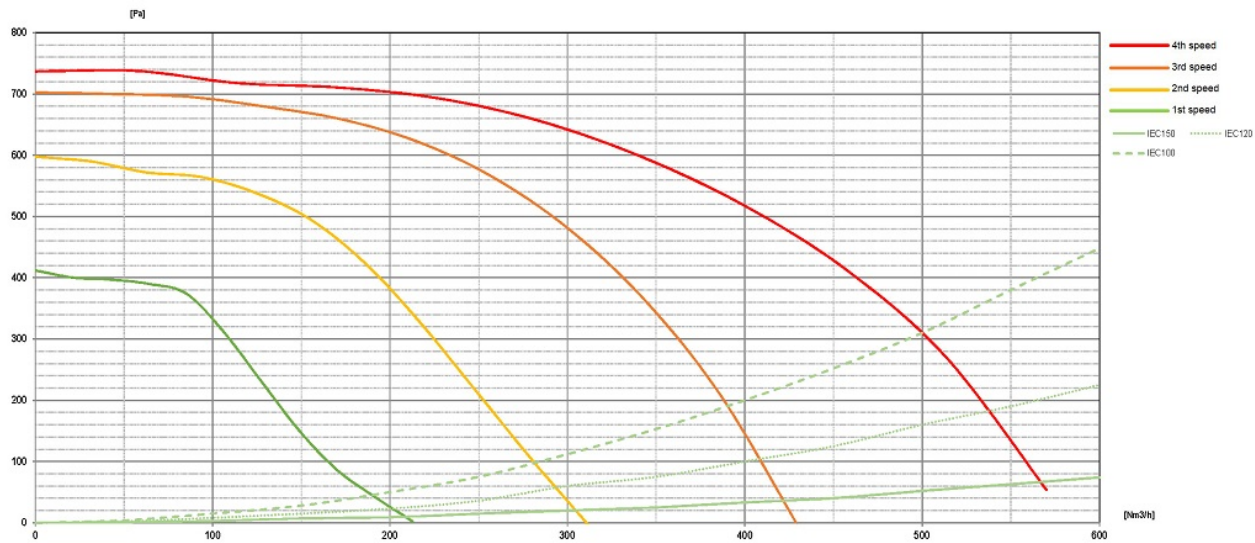

COVER

Version

Cover, Mural 85 cm, E bardhë,
600 m³/h


Mbledhja

Design

Kodi EAN

8034122362823

Etiketen e energjise

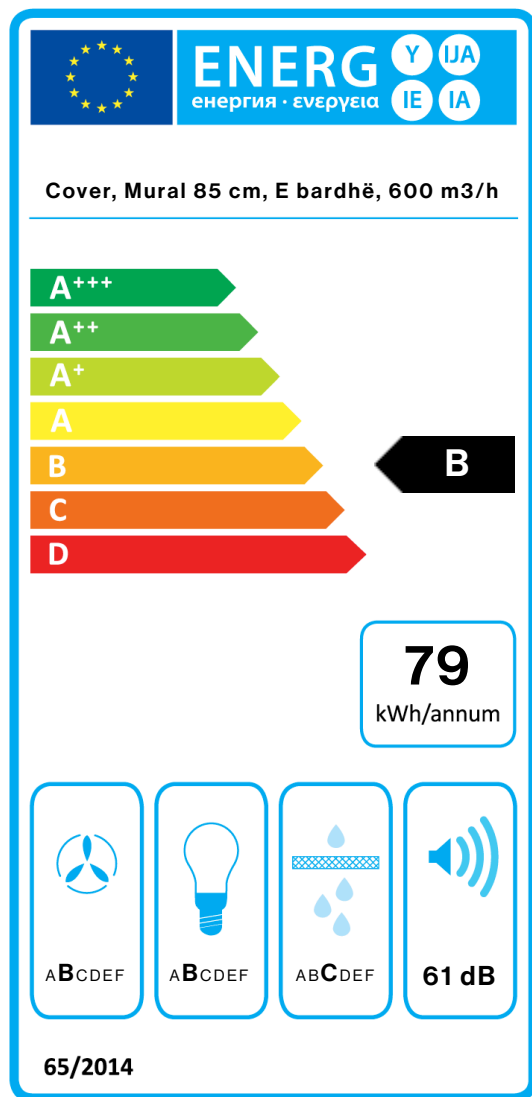

PF		
S	Falmec Spa	
M	Cover, Mural 85 cm, E bardhë, 600 m ³ /h	
AEC	78,7	kWh/a
EEC	B	
FDE	31,6	
FDEC	B	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	210,0	m ³ /h
Qmax	425,0	m ³ /h
Qboost	570,0	m ³ /h
SPEmin	45	dBa
SPEmax	61	dBa
SPEboost	67	dBa
PO	-	W
PS	0,48	W

PI		
F	1	
EEl	60,1	
Qbep	353,0	m ³ /h
Pbep	584	Pa
Qboost	570,0	m ³ /h
Wbep	205,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.