

GRUPPO INCASSO

Versiune

Incorporat 70 cm - 600 m³/h

Colectie

Design

Cod EAN

8034122342764

CARACTERISTICI

Inox AISI 304 Scotch Brite
Aspiratie perimetrala
Control electronic
Filtru de grasime metalic, detasabil si lavabil
Filtru de carbon inclus
Telecomanda inclusa
Dynamic LED Light (2700K - 5600K)

ACCESORII OPTIONALE

KACL.815

Lavete pentru curatare inox (cutie 10 buc)

105080053

Telecomanda

CARACTERISTICI TEHNICE

Tip de instalare

Incorporata

Dimensiuni

70 cm

Finisaj

Inox Scotch Brite (AISI 304)

Motor

600 m³/h

Tipul panoului de control

Control electronic

Setari de viteza

3

Iluminare

Led 2x1,2 W - 2700 K / 5600 K

Filtru

Filtru metalic "Base" - 204x207 mm

Filtru de Carbon

Filtru de carbon rotund Ø212 mm - Tip 2 (optional)

Distanta minima

Plita cu gaz: 62 cm

Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

12 kg

Greutate neta

9.4 kg

Volum

0.12 m³

Dimensiuni ambalaj

Lungime

855 mm

Inaltime

380 mm

Adancime

375 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

230 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

480 m³/h

I.E.C. 61591

Nivel de zgomot maxim

65 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

180 W

CLASA DE ENERGIE

C

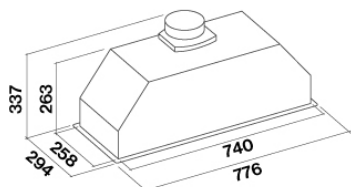

GRUPPO INCASSO

Versiune

Incorporat 70 cm - 600 m³/h

Colectie

Design


Cod EAN

8034122342764

FISA TEHNICA MOTOR

Viteza motorului	1	2	3
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	58	65
Capacitate (m ³ /h) I.E.C.61591	220	320	480
Presiune maxima (Pa)	270	400	500
Putere motor (W)	100	130	180
Evacuare aer	120	120	120

CAPACITATE/ PRESIUNE

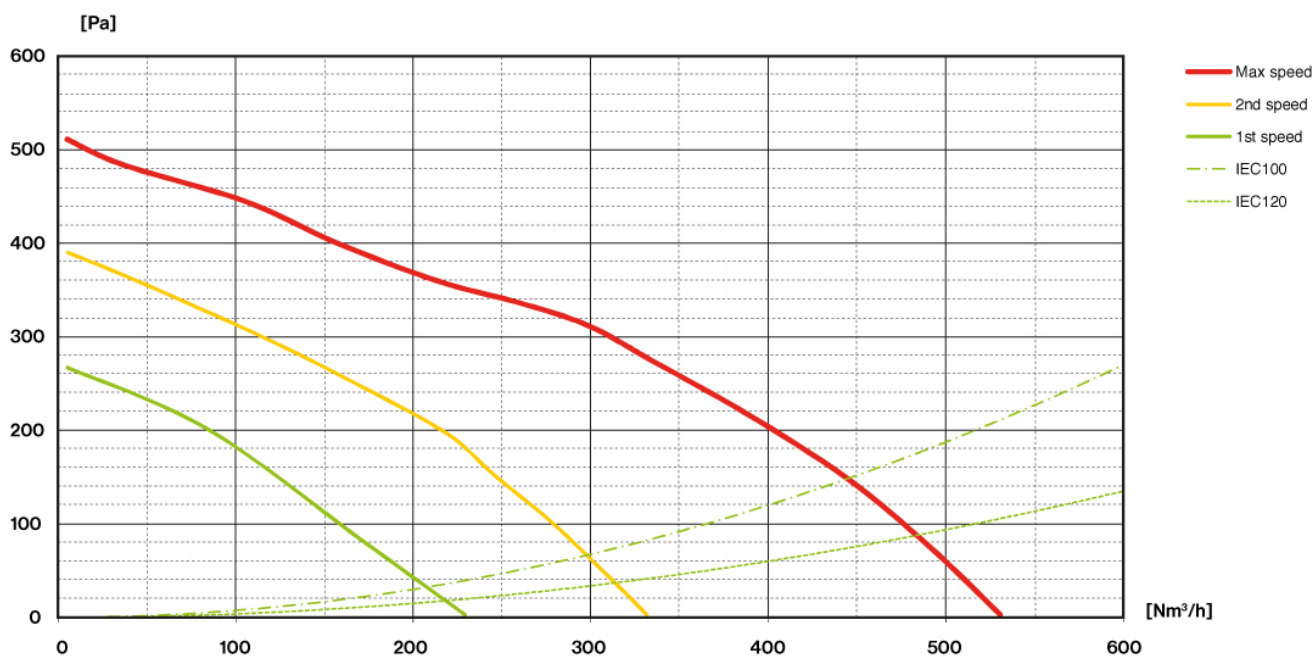

GRUPPO INCASSO

Versiune

Incorporat 70 cm - 600 m3/h


Colectie

Design

Cod EAN

8034122342764

ETICHETA DE ENERGIE

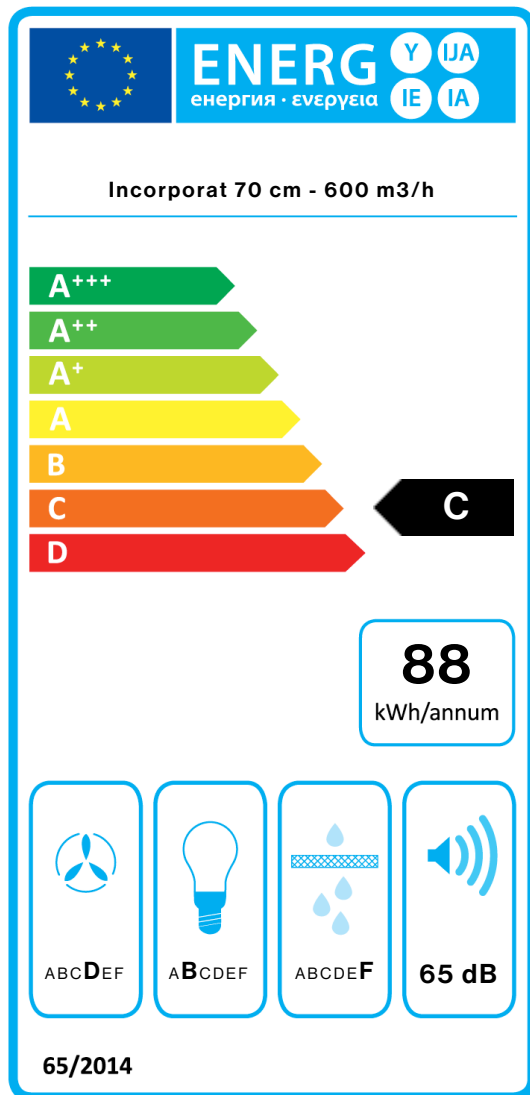

PF		
S	Falmec Spa	
M	Incorporat 70 cm - 600 m3/h	
AEC	87,7	kWh/a
EEC	C	
FDE	15,8	
FDEC	D	
LE	20,5	
LEC	B	
GFE	53,0	
GFEC	F	
Qmin	220,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	480,0	m ³ /h
SPEmin	49	dBa
SPEmax	65	dBa
SPEboost	-	dBa
PO	-	W
PS	0,48	W
PI		
F	1.4	
EEI	80,9	
Qbep	303,0	m ³ /h
Pbep	308	Pa
Qboost	480,0	m ³ /h
Wbep	164,0	W
WL	5,30	W
Emiddle	109	lex
Lwa-SPEmax	65	dBa