

## QUANTUM PRO

### Version

Quantum Pro - worktop 84 cm -  
600 m<sup>3</sup>/h

### Mbledhja

Cooking systems

### Kodi EAN

8034122900339



Imazh tregues i produktit  
Mund të mos përrupthet me versionin e zgjedhur

### KARAKTERISTIKAT GJENERIKE

Filtër metalik i çmontueshëm  
dhe që mund të lahet  
Kohëmatësi automatik i  
ndërprerjes për çdo zonë gatimi  
Funksioni Recall: rivendosni  
cilësimet e gatimit në rast të  
fikjes aksidentale  
Funksioni i rutjajes së  
ushqimeve të ngrohta  
Kontroll Touch Slider për çdo  
zonë gatimi  
9 nivele gatimi + Booster  
Sensor për identifikimin e  
enëve  
Fikje e sigurtë/Funksioni i  
bllokimi  
Funksioni thyej  
Ura të dyfishta  
Motor pa karbonçina  
Zonë shkarkimi me kornizë të  
zezë me sipërfaqe kundër  
gërvishtjeve  
Funksion automatik (shpejtësia  
e thithjes përshtatet  
automatikisht me fuqinë e  
gatimit)  
4 zona gatimi me teknologjinë  
Flex Surface  
Motorized flap system  
I pajisur me kolektor për ujin  
(lëngjet)  
Power level management from  
2.8kW to 7.4kW  
Carbon.Zeo filter with  
saturation level (optional)

### NË DISPOZICION AKSESORË OPSIONALE

#### KACL.155#NF

Set kornize Quantum, e zezë

#### KACL.930

Filtër Karbon Zeoliti

#### KACL.931

Filters Carbon.Zeo - Spare

#### KACL.951

Set i filtrit të riqarkullimit L 60

### KARAKTERISTIKAT TEKNIKE

#### Instalimi

Worktop

#### Përmasat e produktit

84 cm

#### Ngjyra

Xham qeramik e zezë Schott

#### Motor

600 m<sup>3</sup>/h

#### Paneli i kontrollit

Kontrolli me prekje

#### Shpejtësia e funksionimit

9 + boost

### PAKETIM: PESHAT DHE VËLLIMET

#### Peshë bruto

32.6 kg

#### Pesha neto

26.5 kg

#### Vëllimi

0.24 m<sup>3</sup>

#### Paketim

Gjatësia

1055 mm

Lartësia

375 mm

Thellesi

610 mm

### Funksionet e lidhjes dhe konsumit

#### Konsumi maksimal

7560 W

#### Tensioni

220-240V

#### Frekuenca

50-60Hz

### KARAKTERISTIKAT TEKNIKE TË MOTORIT

#### Kapaciteti maksimale

495 m<sup>3</sup>/h

I.E.C. 61591

#### Zhurma maksimale

69 dB(A)re1pW

I.E.C.60704-2-13

#### Presioni maksimale

640 Pa

#### Fuqia maksimale e motorit

131 W

#### Klasit të energjisë

A+

mm

**KACL.952**

Filter replacement (underbase

Slim filter unit - h60mm)

**KACL.955**

Skarë për filtrin e poshtëm L 60

mm

## QUANTUM PRO

### Version








Quantum Pro - worktop 84 cm -  
600 m<sup>3</sup>/h

### Mbledhja

Cooking systems

### Kodi EAN

8034122900339



## QUANTUM PRO

### Version

Quantum Pro - worktop 84 cm -  
600 m<sup>3</sup>/h

### Mbledhja

Cooking systems


### Kodi EAN

8034122900339

### Karakteristikat teknike të motorit

Shpejtësia e motorit	1	5	9	10
Zhurma dB(A)re1pW- I.E.C.60704-2-13	46	-	64	69
Kapaciteti (m <sup>3</sup> /h) I.E.C.61591	170	310	390	495
Presioni maksimale	80	220	420	640
Fuqia	11	32	74	131
Dalja e ajrit	220x90	220x90	220x90	220x90

### Rrjedha e presionit

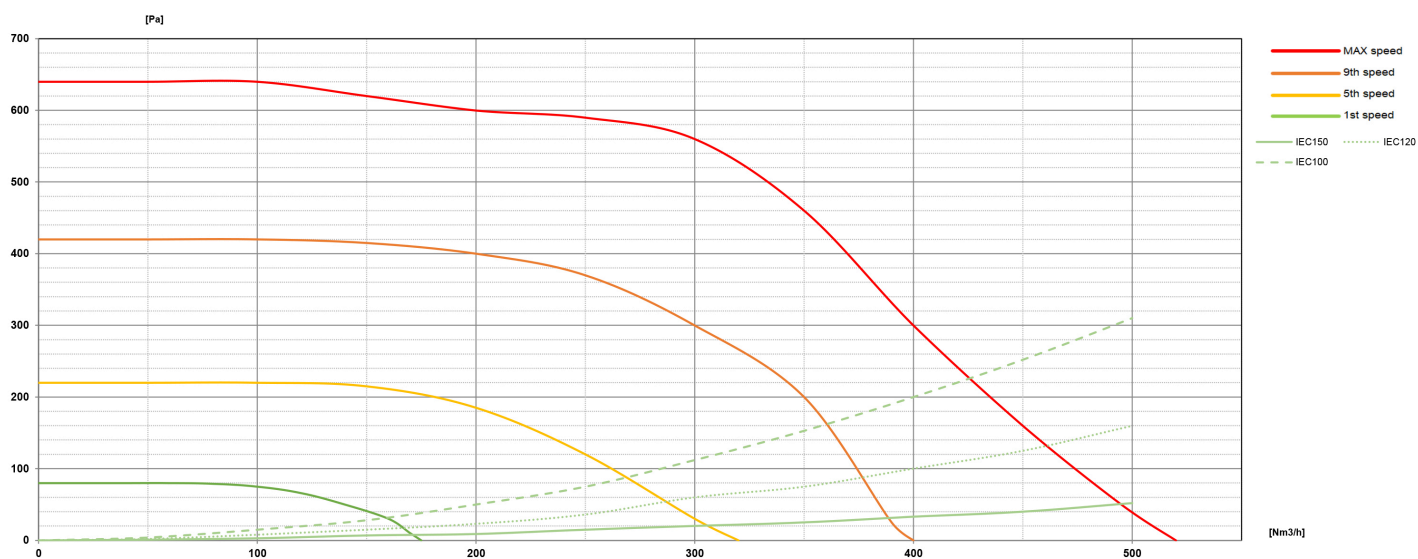

## QUANTUM PRO

### Version

Quantum Pro - worktop 84 cm -  
600 m<sup>3</sup>/h


### Mbledhja

Cooking systems

### Kodi EAN

8034122900339

## Etiketen e energjise

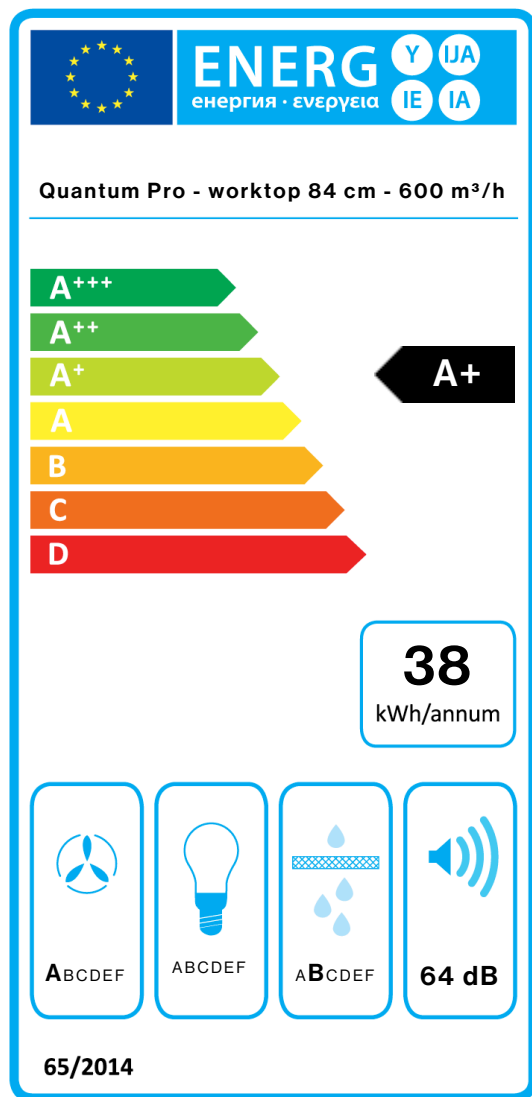

PF		
S	Falmec Spa	
M	Quantum Pro - worktop 84 cm - 600 m <sup>3</sup> /h	
AEC	38,3	kWh/a
EEC	A+	
FDE	33,1	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	170,0	m <sup>3</sup> /h
Qmax	390,0	m <sup>3</sup> /h
Qboost	495,0	m <sup>3</sup> /h
SPEmin	46	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W

PI		
F	0.8	
EEI	43,8	
Qbep	267,0	m <sup>3</sup> /h
Pbep	584	Pa
Qboost	495,0	m <sup>3</sup> /h
Wbep	131,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	64	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.