

ZERO EASY

Version

Zero Easy - 84 cm - 600 m³/h

Mbledhja

Cooking systems

Kodi EAN

8034122900940

KARAKTERISTIKAT GJENERIKE

Filtër metalik i çmontueshëm dhe që mund të lahet
Disponueshëm vetëm në versionin me filtrim
Treguesi i nxehtësisë së mbetur
Funksioni Recall: rivendosni cilësimet e gatimit në rast të fikjes aksidentale
Funksioni i rutjajes së ushqimeve të ngrohta
Kontroll Touch Slider për çdo zonë gatimi
9 nivele gatimi + Booster
Sensor për identifikimin e enëve
Automatic cut-off timer (for each cooking zone)
Kohëmatës
Fikje e sigurtë/Funksioni i bllokimi
Funksioni thyej
Motor pa karbonçina
Funksion automatik (shpejtësia e thithjes përshtatet automatikisht me fuqinë e gatimit)
4 zona gatimi me teknologjinë Flex Surface
Bridge function
I pajisur me kolektor për ujin (lëngjet)
Power level management from 2.8kW to 7.4kW
Carbon.Zeo Microtech filter

NË DISPOZICION AKSESORË OPSIONALE

KACL.1036

Anti-noise conveyer

KACL.1043

Filter Carbon.Zeo Microtech renewable

KACL.155#NF

Set kornize Quantum, e zezë

KARAKTERISTIKAT TEKNIKE

Instalimi

Worktop

Përmasat e produktit

84 cm

Ngjyra

Xham qeramik e zezë Schott

Motor

600 m³/h

Paneli i kontrollit

Kontrolli me prekje

Shpejtësia e funksionimit

9 + boost

Filtër karbon

Filter Carbon.Zeo Microtech renewable (E përfshirë)



Imazh tregues i produktit

Mund të mos përputhet me versionin e zgjedhur

PAKETIM: PESHAT DHE VËLLIMET

Peshë bruto

34 kg

Pesha neto

27.9 kg

Vëllimi

0.24 m³

Paketim

Gjatësia

1055 mm

Lartësia

375 mm

Thellesi

610 mm

Funksionet e lidhjes dhe konsumit

Konsumi maksimal

7560 W

Tensioni

220-240V

Frekuenca

50-60Hz

Klasit të energjisë

A+

ZERO EASY

Version









Zero Easy - 84 cm - 600 m³/h

Mbledhja

Cooking systems

Kodi EAN

8034122900940



ZERO EASY

Version

Zero Easy - 84 cm - 600 m3/h


Mbledhja

Cooking systems

Kodi EAN

8034122900940

Etiketen e energjise

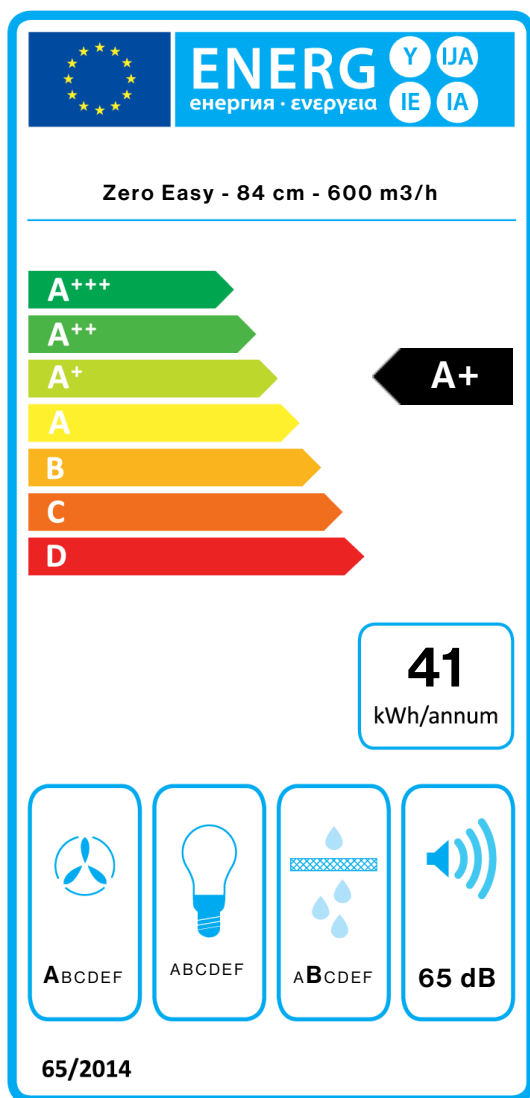

PF		
S	Falmec Spa	
M	Zero Easy - 84 cm - 600 m3/h	
AEC	41,4	kWh/a
EEC	A+	
FDE	34,8	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	380,0	m ³ /h
Qmax	495,0	m ³ /h
Qboost	515,0	m ³ /h
SPEmin	47	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEI	39,7	
Qbep	305,0	m ³ /h
Pbep	665	Pa
Qboost	515,0	m ³ /h
Wbep	162,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.