

GRUPPO INCASSO NRS

Version

Built-in 50 cm - 800 m³/h

Collection

Silence - NRS

EAN code

8034122343105



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

NRS technology for a quieter kitchen

Electronic control

Metallic grease filter, removable and washable

Optional charcoal filter

Remote control included

Dynamic LED Light (2700K - 5600K)

Cut-out size: 506 x 262 mm

 Availability Carbon.Zeo filter
KACL.961 for hoods produced
from 11/14/2020

OPTIONAL ACCESSORIES

KACL.400

Silent / Conveyer NRS

KACL.815

Protective cleaning cloths for
stainless steel (box 10 pcs)

KACL.920

High Performance Filter

KACL.961

Charcoal and Zeolite filter

105080053

Remote control

TECHNICAL FEATURES

Installation type

Built-in

Dimensions

50 cm

Finishing

Scotch brite stainless steel (AISI
304)

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 2x1,2 W - 3200 K

Filter

Top - Gr. Incasso NRS / 50 cm

Charcoal filter

High Performance Filter
(optional)

Minimum distance

Gas hob: 57 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

26.2 kg

Net weight

21.6 kg

Volumes

0.26 m³

Packaging size

Length

950 mm

Height

410 mm

Depth

655 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

610 m³/h

I.E.C. 61591

Maximum noise level

55 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


582 Pa

Max. motor power

224 W

ENERGY CLASS

B



GRUPPO INCASSO NRS

Version

Built-in 50 cm - 800 m3/h

Collection

Silence - NRS


EAN code

8034122343105

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	55
Capacity (m3/h) I.E.C.61591	190	300	380	610
Maximum pressure (Pa)	490	500	520	582
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

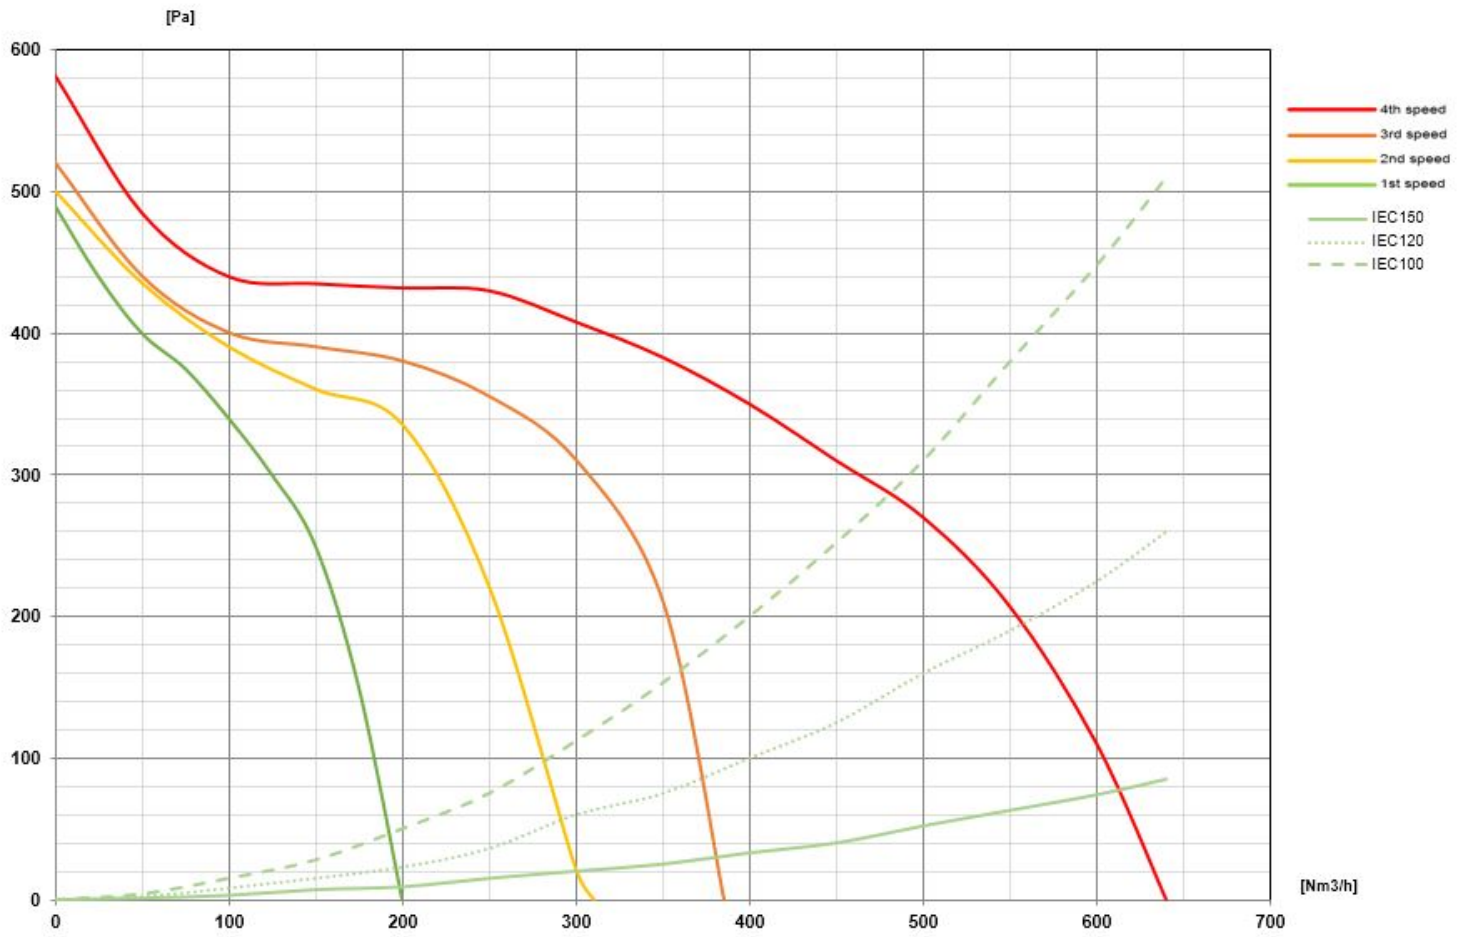

GRUPPO INCASSO NRS

Version

Built-in 50 cm - 800 m3/h


Collection

Silence - NRS

EAN code

8034122343105

ENERGY LABEL

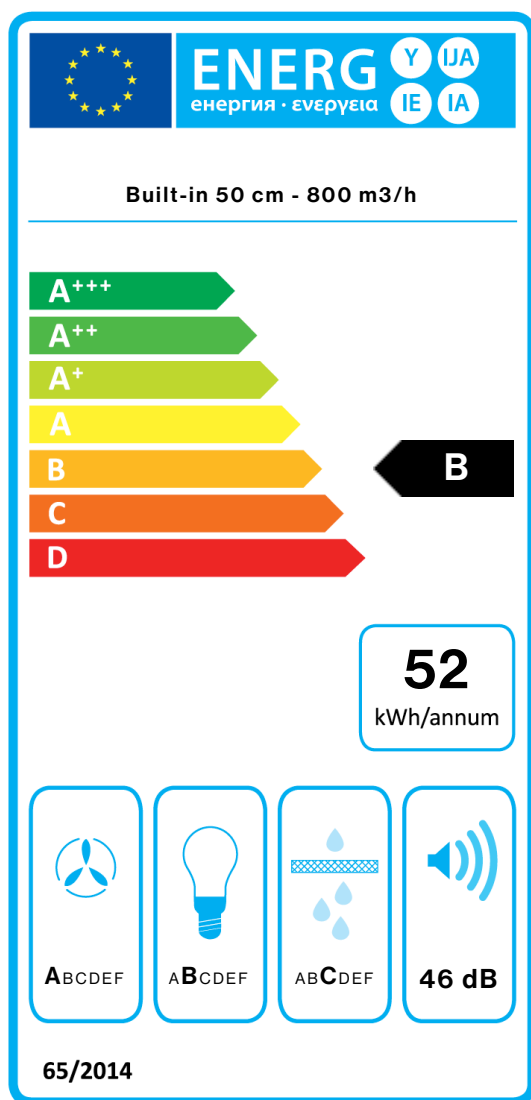

PF		
S	Falmec Spa	
M	Built-in 50 cm - 800 m3/h	
AEC	51,7	kWh/a
EEC	B	
FDE	28,9	
FDEC	A	
LE	20,5	
LEC	B	
GFE	80,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	57,3	
Qbep	369,0	m ³ /h
Pbep	369	Pa
Qboost	610,0	m ³ /h
Wbep	131,0	W
WL	5,30	W
Emiddle	109	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.