

BRERA

Bordemhætte - 89 cm - Sort -
800 m³/h

Sortiment

Bordemhætte

EAN Kode

8034122900353



Fotografiet er udelukkende informativt
Korresponderer ikke nødvendigvis tmed den valgte model

FUNKTIONER

Vaskbare rustfrie fedtfiltere
Restvarme indikator
Genskab funktion: Genskaber
indstillinger i tilfælde af
fejlagtig slukning
Hold varm funktion
Touch glidekontrol med rødt
LED-display
9 varmetrin + powerfunktion
(Dobble boost)
Automatisk gryde sensor
Automatisk sluk-sensor for hver
kogezone
Timer. Minutur
Børnesikring
Pause og genkald
Dobbelt brofunktion
Chef Funktion: Power
management på kogezoneerne
Børsteløs motor
Mulig fuldautomatisk emhætte
4 cooking areas with Flex
Surface technology
Motorized flap system
Liquid collector
Power level management from
2.8kW to 7.4kW
Carbon.Zeo Microtech filter
(optional)

TEKNISK BESKRIVELSE

Installation
Kogeplade
Dimensioner
89 cm
Materiale
Schott black ceramic glass
Motor
800 m³/h
Betjening
Betjening med touch
Hastighed
9 + boost

EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt
35.5 kg
Nettovægt
30.3 kg
Volumen
0.29 m³
Mål på emballage
Længde
980 mm
Højde
480 mm
Dybde
615 mm

FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug
7560 W
Spænding
220-240V
Frekvens
50-60Hz

DATABLAD MOTOR

Maksimal kapacitet
690 m³/h
I.E.C. 61591
Maksimalt støjniveau
66 dB(A)re1pW
I.E.C.60704-2-13
Maksimalt tryk (Pa)
680 Pa
Maksimal sugestyrke
150 W
ENERGIKLASSE
A+++

MULIGHEDER FOR TILVALG

KACL.1026

Silence Kit

KACL.1054

Filter Carbon.Zeo Microtech
renewable

BRERA









Bordemhætte - 89 cm - Sort -
800 m³/h

Sortiment

Bordemhætte

EAN Kode

8034122900353



BRERA

Bordemhætte - 89 cm - Sort -
800 m³/h

Sortiment

Bordemhætte


EAN Kode

8034122900353

DATABLAD MOTOR

Motorhastighed	1	5	9	10
Støjniveau dB(A) _{re1pW-I.E.C.60704-2-13}	44	57	65	66
Kapacitet (m ³ /h) I.E.C.61591	254	460	640	690
Maksimalt tryk (Pa)	200	650	670	680
Forbrug (W)	11	50	110	150
Luftudtag	150	150	150	150

KAPACITET / TRYK

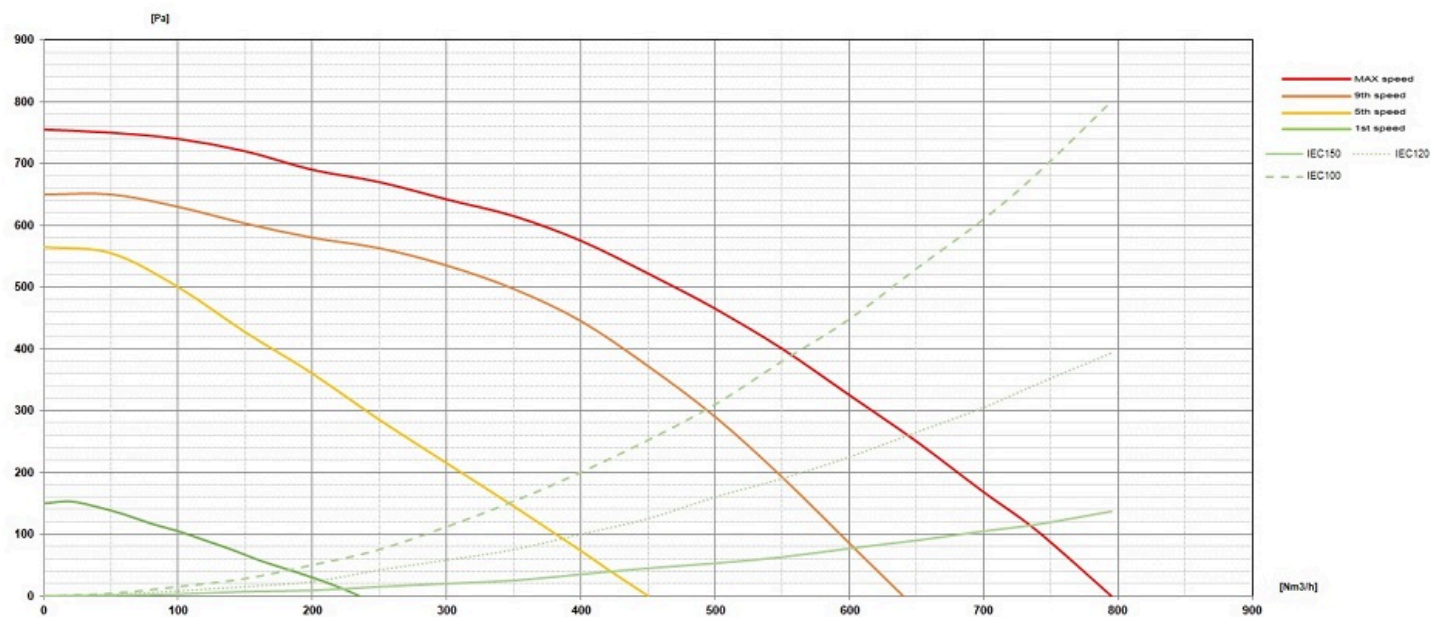

BRERA


Bordemhætte - 89 cm - Sort -
800 m3/h

Sortiment

Bordemhætte

EAN Kode

8034122900353

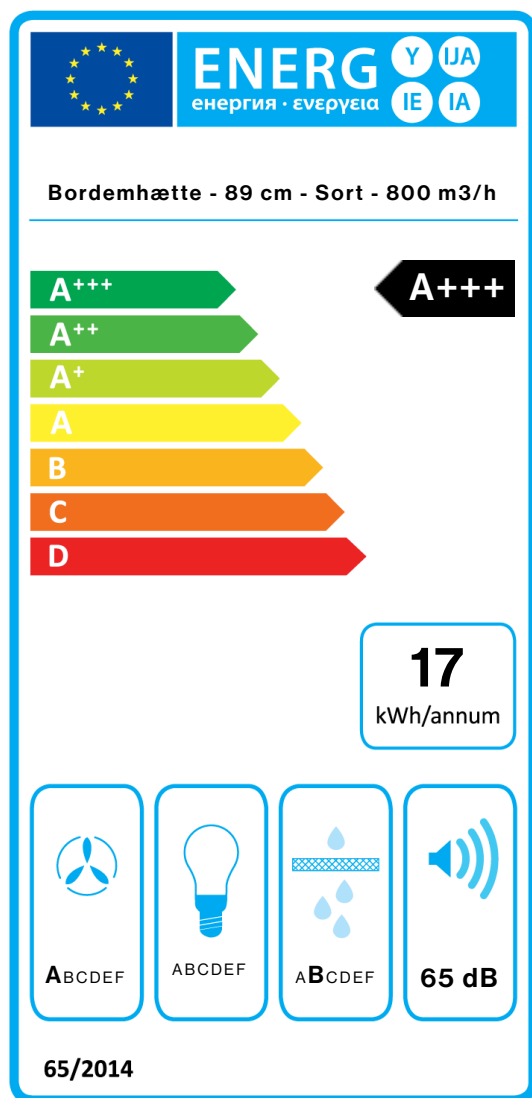

PF		
S	Falmec Spa	
M	Bordemhætte - 89 cm - Sort - 800 m3/h	
AEC	16,5	kWh/a
EEC	A+++	
FDE	43,4	
FDEC	A	
LE	0,0	
LEC		
GFE	87,0	
GFEC	B	
Qmin	254,0	m ³ /h
Qmax	640,0	m ³ /h
Qboost	690,0	m ³ /h
SPEmin	44	dBa
SPEmax	65	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	0.4	
EEI	21,3	
Qbep	384,0	m ³ /h
Pbep	460	Pa
Qboost	690,0	m ³ /h
Wbep	113,0	W
WL	0,00	W
Emiddle	0	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.