

MANHATTAN

Version

Collection

Mirabilia

EAN code

8034122349077




The photograph is purely for information
It may not correspond to the selected version.

FEATURES

- Scotch brite stainless steel (AISI 304)
- Glass
- Perimeter suction
- Electronic control
- LED ambient light
- LED lighting
- Metallic grease filter, removable and washable
- Charcoal filter included

OPTIONAL ACCESSORIES

- KACL.274**
Elektra - Island 65 cm
- KACL.276**
Pharo - Island 65 cm
- KACL.277**
Manhattan - Island 65 cm
- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF**
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF**
Remote under-roof motor 1300 m3/h
- KACL.798#41F**
Remote under-roof motor 950 m3/h
- KACL.815**
Protective cleaning cloths for stainless steel (box 10 pcs)



TECHNICAL FEATURES

- Installation type**
Island
- Finishing**
Scotch brite stainless steel (AISI 304)
- Glass
- Motor**
800 m³/h
- Type of control**
Electronic control
- Speed settings**
4
- Lighting**
Led 4x1,2 W - 3200 K
- Ambient lighting**
Ambient led
- Filter**
Metallic filter "Base" - 277x294 mm
- Charcoal filter**
Round charcoal filter Ø170 mm - Type 6 (included)
- Minimum distance**
Gas hob: 60 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- MANHATTAN Gross weight**
30 kg
- Net weight**
23 kg
- Volumes**
0.43 m³
- Packaging size**
Length
1070 mm
Height
460 mm
Depth
870 mm
- GLASS KIT Manhattan - Island**
65 cm **Gross weight**
10 kg
- Net weight**
8 kg
- Volumes**
0.12 m³
- Packaging size**
Length
590 mm
Height
440 mm
Depth
450 mm

CONSUMPTION AND CONNECTION FEATURES

- Voltage**
220-240V
- Frequency**
50-60Hz
- Plug type**
Shuko
- MOTOR TECHNICAL SHEET**
Maximum capacity
680 m³/h
I.E.C. 61591
- Maximum noise level**
68 dB(A)re1pW
I.E.C.60704-2-13
- Maximum pressure (Pa)**
510 Pa
- Max. motor power**
224 W
- ENERGY CLASS**
B

MANHATTAN

Version

Collection

Mirabilia


EAN code

8034122349077

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	54	57	63	68
Capacity (m3/h) I.E.C.61591	270	370	490	680
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE

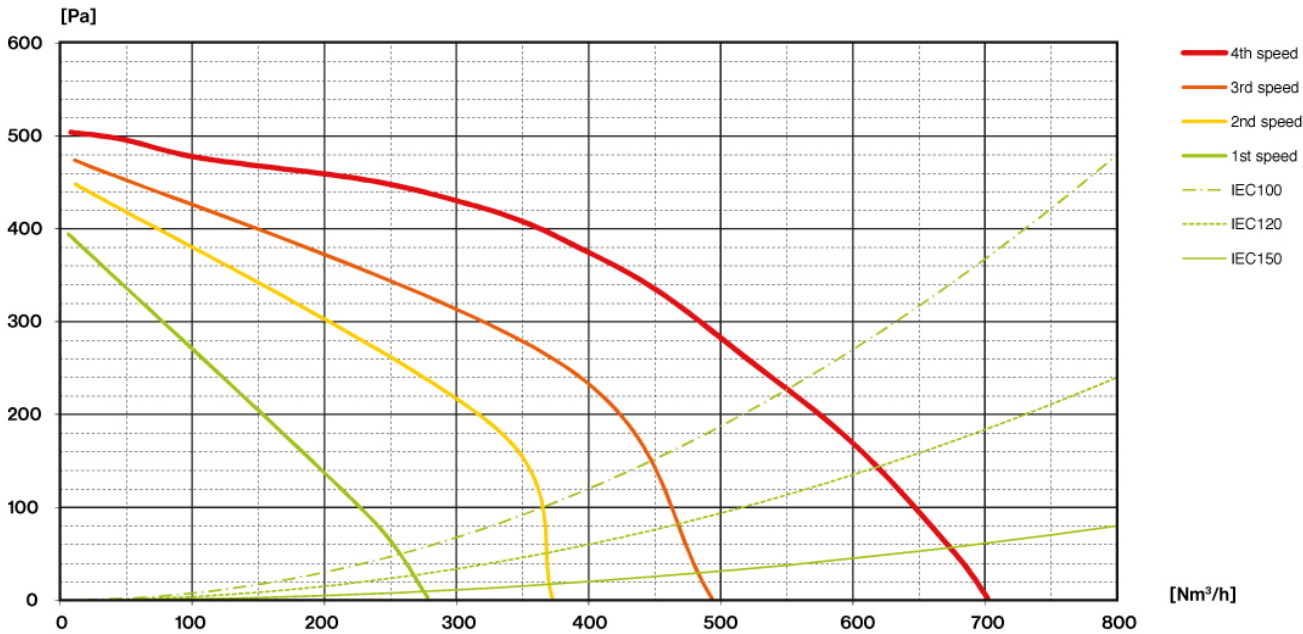

MANHATTAN

Version


Collection

Mirabilia

EAN code

8034122349077

ENERGY LABEL

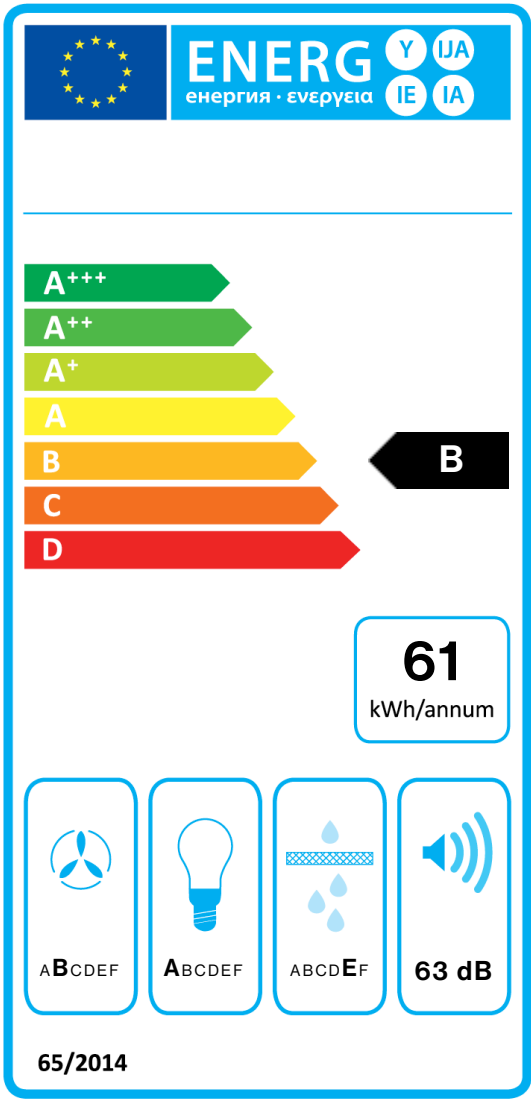

PF		
S	Falmec Spa	
M		
AEC	61,2	kWh/a
EEC	B	
FDE	26,6	
FDEC	B	
LE	28,4	
LEC	A	
GFE	60,0	
GFEC	E	
Qmin	270,0	m³/h
Qmax	490,0	m³/h
Qboost	680,0	m³/h
SPEmin	54	dBa
SPEmax	63	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	59,5	
Qbep	357,0	m³/h
Pbep	404	Pa
Qboost	680,0	m³/h
Wbep	150,6	W
WL	8,60	W
Emiddle	245	lex
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.