

FENICE

Version

Collection

Mirabilia

EAN code

8034122342405



The photograph is purely for information  
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel (AISI 304)  
Glass  
Electronic control  
LED ambient light  
LED lighting  
Metallic grease filter, removable and washable

OPTIONAL ACCESSORIES

- KACL.226  
Elektra - Island 85 cm
- KACL.228  
Pharo - Island 85 cm
- KACL.229  
Manhattan - Island 85 cm
- KACL.553#I  
Extension H1200 - Island
- KACL.770#41F  
Remote under-roof 1100 m3/h  
Brushless
- KACL.786#41F  
Outdoor extractor fan 1000 m3/h
- KACL.796#4AF  
Outdoor extractor fan 1500 m3/h
- KACL.797#4AF  
Remote under-roof motor 1300 m3/h
- KACL.798#41F  
Remote under-roof motor 950 m3/h
- KACL.815  
Protective cleaning cloths for stainless steel (box 10 pcs)

TECHNICAL FEATURES


Installation type  
Island  
Finishing  
Scotch brite stainless steel (AISI 304)  
Glass  
Motor  
800 m³/h  
Type of control  
Electronic control  
Speed settings  
4  
Lighting  
Led 4x1,2 W - 3200 K  
Ambient lighting  
Ambient led  
Filter  
Metallic filter "Base" - 277x294 mm  
Charcoal filter  
Round charcoal filter Ø170 mm - Type 6 (included)  
Minimum distance  
Gas hob: 60 cm  
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

FENICE Gross weight  
40 kg  
Net weight  
32 kg  
Volumes  
0.64 m³  
Packaging size  
Length  
1035 mm  
Height  
840 mm  
Depth  
740 mm  
GLASS KIT Fenice - Island 85 cm Gross weight  
11.4 kg  
Net weight  
9 kg  
Volumes  
0.15 m³  
Packaging size  
Length  
620 mm  
Height  
430 mm  
Depth  
545 mm

CONSUMPTION AND CONNECTION FEATURES

Voltage  
220-240V  
Frequency  
50-60Hz  
Plug type  
Shuko  
  
MOTOR TECHNICAL SHEET  
Maximum capacity  
680 m³/h  
I.E.C. 61591  
Maximum noise level  
68 dB(A)re1pW  
I.E.C.60704-2-13  
Maximum pressure (Pa)  
510 Pa  
Max. motor power  
224 W  
ENERGY CLASS  
B



FENICE

Version

Collection

Mirabilia

EAN code

8034122342405

MOTOR TECHNICAL SHEET

| Motor speed                                | 1   | 2   | 3   | 4   |
|--------------------------------------------|-----|-----|-----|-----|
| Noise level<br>dB(A)re1pW-I.E.C.60704-2-13 | 54  | 57  | 63  | 68  |
| Capacity (m3/h)<br>I.E.C.61591             | 270 | 370 | 490 | 680 |
| Maximum pressure (Pa)                      | 390 | 440 | 490 | 510 |
| Motor Power (W)                            | 130 | 150 | 178 | 224 |
| Air outlet                                 | 150 | 150 | 150 | 150 |

CAPACITY / PRESSURE




FENICE

Version

Collection  
Mirabilia

EAN code  
8034122342405

ENERGY LABEL

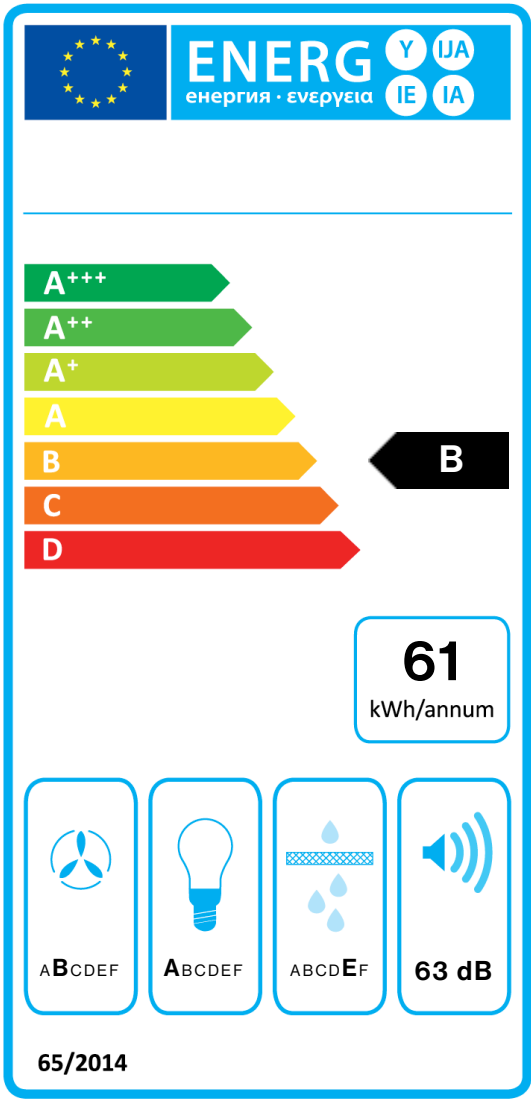

| PF         |            |       |
|------------|------------|-------|
| S          | Falmec Spa |       |
| M          |            |       |
| AEC        | 61,2       | kWh/a |
| EEC        | B          |       |
| FDE        | 26,6       |       |
| FDEC       | B          |       |
| LE         | 28,4       |       |
| LEC        | A          |       |
| GFE        | 60,0       |       |
| GFEC       | E          |       |
| Qmin       | 270,0      | m³/h  |
| Qmax       | 490,0      | m³/h  |
| Qboost     | 680,0      | m³/h  |
| SPEmin     | 54         | dBa   |
| SPEmax     | 63         | dBa   |
| SPEboost   | 68         | dBa   |
| PO         | -          | W     |
| PS         | 0,48       | W     |
| PI         |            |       |
| F          | 1          |       |
| EEl        | 59,5       |       |
| Qbep       | 357,0      | m³/h  |
| Pbep       | 404        | Pa    |
| Qboost     | 680,0      | m³/h  |
| Wbep       | 150,6      | W     |
| WL         | 8,60       | W     |
| Emiddle    | 245        | lux   |
| Lwa-SPEmax | 63         | dBa   |

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m³/h) at min speed in normal use / Qmax\_Air flow (in m³/h) at max speed in normal use / Qboost\_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximun air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.