

PENELOPE

Version

Collection

Mirabilia

EAN code

8034122342405



The photograph is purely for information
It may not correspond to the selected version.

FEATURES

Scotch brite stainless steel
(AISI 304)

Glass

Electronic control

LED ambient light

LED lighting

Metallic grease filter,
removable and washable

OPTIONAL ACCESSORIES

KACL.226

Elektra - Island 85 cm

KACL.228

Pharo - Island 85 cm

KACL.229

Manhattan - Island 85 cm

KACL.553#I

Extension H1200 - Island

KACL.770#41F

Remote under-roof 1100 m3/h
Brushless

KACL.786#41F

Outdoor extractor fan 1000
m3/h

KACL.796#4AF

Outdoor extractor fan 1500 m3/h

KACL.797#4AF

Remote under-roof motor 1300
m3/h

KACL.798#41F

Remote under-roof motor 950
m3/h

KACL.815

Protective cleaning cloths for
stainless steel (box 10 pcs)

TECHNICAL FEATURES

Installation type

Island

Finishing

Scotch brite stainless steel (AISI
304)

Glass

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 4x1,2 W - 3200 K

Ambient lighting

Ambient led

Filter

Metallic filter "Base" - 277x294
mm

Charcoal filter

Round charcoal filter Ø170 mm -
Type 6 (included)

Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND
VOLUMES

PENELOPE Gross weight

40 kg

Net weight

32 kg

Volumes

0.64 m³

Packaging size

Length

1035 mm

Height

840 mm

Depth

740 mm

GLASS KIT Penelope - Island

85 cm Gross weight

11.4 kg

Net weight

9 kg

Volumes

0.15 m³

Packaging size

Length

620 mm

Height

430 mm

Depth

545 mm

CONSUMPTION AND
CONNECTION FEATURES

Voltage

220-240V

Frequency

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

680 m³/h

I.E.C. 61591

Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


510 Pa

Max. motor power

224 W

ENERGY CLASS

B



PENELOPE

Version

Collection

Mirabilia

EAN code

8034122342405

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	54	57	63	68
Capacity (m3/h) I.E.C.61591	270	370	490	680
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

CAPACITY / PRESSURE



PENELOPE

Version


Collection

Mirabilia

EAN code

8034122342405

ENERGY LABEL

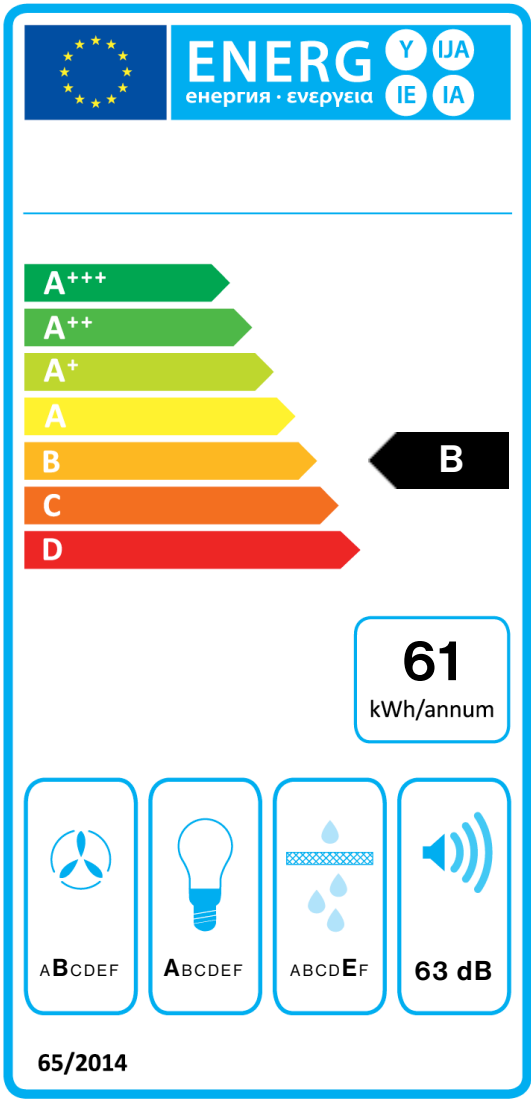

PF		
S	Falmec Spa	
M		
AEC	61,2	kWh/a
EEC	B	
FDE	26,6	
FDEC	B	
LE	28,4	
LEC	A	
GFE	60,0	
GFEC	E	
Qmin	270,0	m³/h
Qmax	490,0	m³/h
Qboost	680,0	m³/h
SPEmin	54	dBa
SPEmax	63	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	59,5	
Qbep	357,0	m³/h
Pbep	404	Pa
Qboost	680,0	m³/h
Wbep	150,6	W
WL	8,60	W
Emiddle	245	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.