

## PHARO

### Version

### Collection

Mirabilia

### EAN code

8034122342405



The photograph is purely for information  
It may not correspond to the selected version.

## FEATURES

**Scotch brite stainless steel (AISI 304)**  
**Glass**  
**Electronic control**  
**LED ambient light**  
**LED lighting**  
**Metallic grease filter, removable and washable**  
**Possible to duct wall mounted from rear**

## OPTIONAL ACCESSORIES

### KACL.553#I

Extension H1200 - Island

### KACL.770#41F

Remote under-roof 1100 m<sup>3</sup>/h

Brushless

### KACL.786#41F

Outdoor extractor fan 1000 m<sup>3</sup>/h

### KACL.796#4AF

Outdoor extractor fan 1500 m<sup>3</sup>/h

### KACL.797#4AF

Remote under-roof motor 1300 m<sup>3</sup>/h

### KACL.798#41F

Remote under-roof motor 950 m<sup>3</sup>/h

### KACL.815

Protective cleaning cloths for stainless steel (box 10 pcs)

## TECHNICAL FEATURES

### Installation type

Island

### Finishing

Scotch brite stainless steel (AISI 304)

Glass

### Motor

800 m<sup>3</sup>/h

### Type of control

Electronic control

### Speed settings

4

### Lighting

Led 4x1,2 W - 3200 K

### Ambient lighting

Ambient led

### Filter

Metallic filter "Base" - 277x294 mm

### Charcoal filter

Round charcoal filter Ø170 mm - Type 6 (included)

### Minimum distance

Gas hob: 60 cm

Electric hob: 52 cm

## PACKAGING:WEIGHTS AND VOLUMES

### PHARO Gross weight

40 kg

### Net weight

32 kg

### Volumes

0.64 m<sup>3</sup>

### Packaging size

Length

1035 mm

Height

840 mm

Depth

740 mm

### GLASS KIT Pharo - Island 85

cm **Gross weight**

11.4 kg

### Net weight

9 kg

### Volumes

0.15 m<sup>3</sup>

### Packaging size

Length

620 mm

Height

430 mm

Depth

545 mm

## CONSUMPTION AND CONNECTION FEATURES

### Voltage

220-240V

### Frequency

50-60Hz

### Plug type

Shuko

## MOTOR TECHNICAL SHEET

### Maximum capacity

680 m<sup>3</sup>/h

I.E.C. 61591

### Maximum noise level

68 dB(A)re1pW

I.E.C.60704-2-13

### Maximum pressure (Pa)


510 Pa

### Max. motor power

224 W

## ENERGY CLASS

B



PHARO

Version

Collection

Mirabilia


EAN code

8034122342405

## MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	54	57	63	68
Capacity (m3/h) I.E.C.61591	270	370	490	680
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

## CAPACITY / PRESSURE

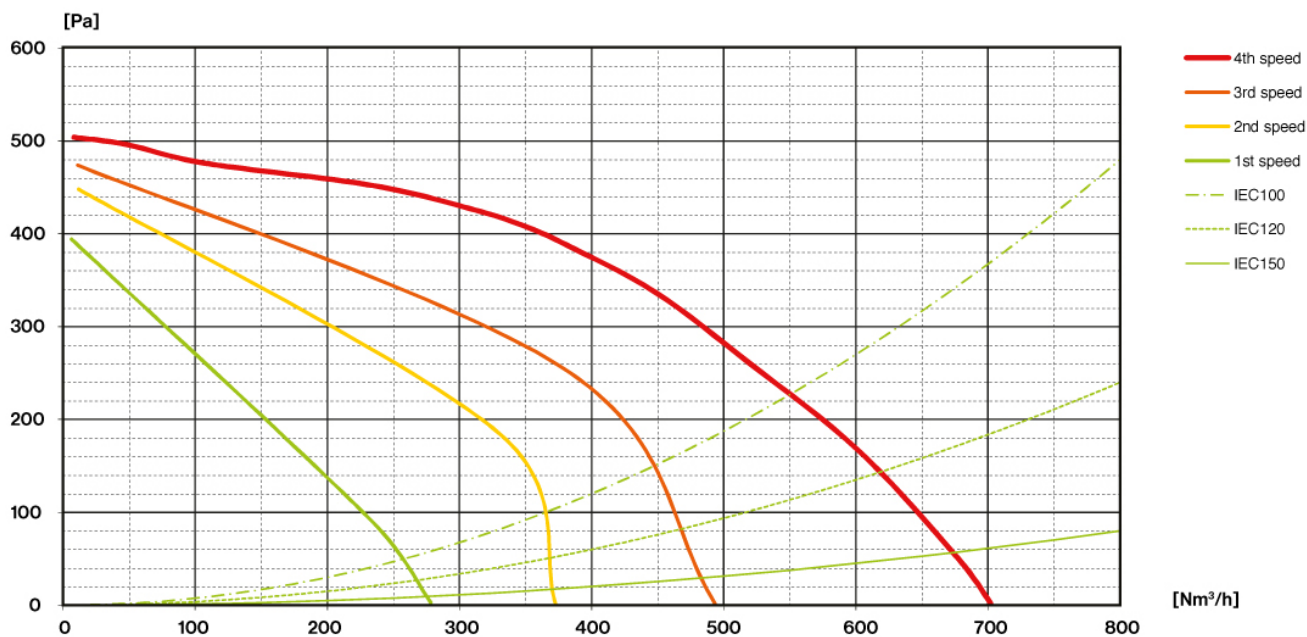

PHARO

Version


Collection

Mirabilia

EAN code

8034122342405

## ENERGY LABEL

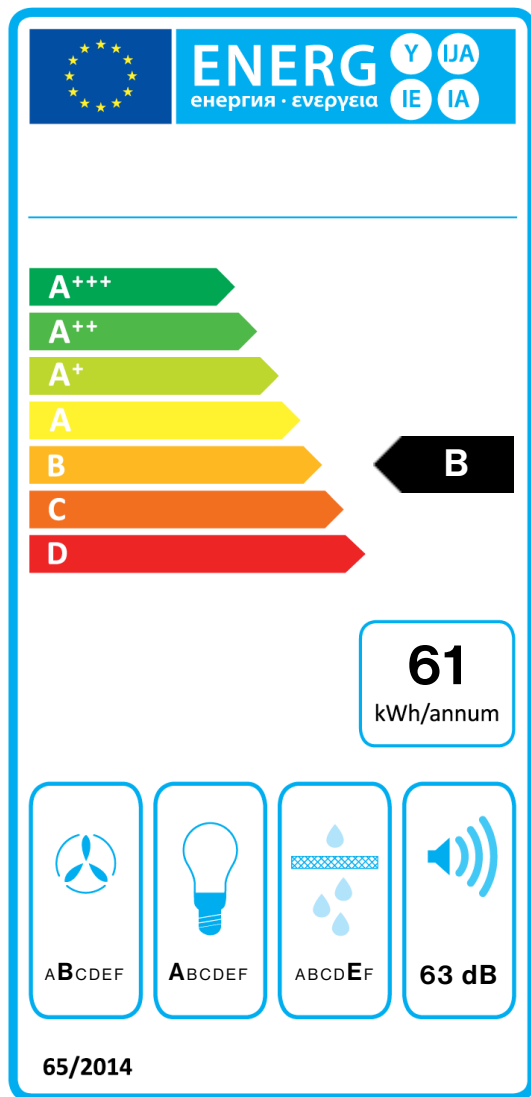

PF		
S	Falmec Spa	
M		
AEC	61,2	kWh/a
EEC	B	
FDE	26,6	
FDEC	B	
LE	28,4	
LEC	A	
GFE	60,0	
GFEC	E	
Qmin	270,0	m <sup>3</sup> /h
Qmax	490,0	m <sup>3</sup> /h
Qboost	680,0	m <sup>3</sup> /h
SPEmin	54	dBa
SPEmax	63	dBa
SPEboost	68	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	59,5	
Qbep	357,0	m <sup>3</sup> /h
Pbep	404	Pa
Qboost	680,0	m <sup>3</sup> /h
Wbep	150,6	W
WL	8,60	W
Emiddle	245	lx
Lwa-SPEmax	63	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.