

## EUROPA 175 BLACK


Frithængt - 175 cm - Sort - 800  
m<sup>3</sup>/h - recirkulation

### Sortiment

Design

### EAN Kode

8034122365688

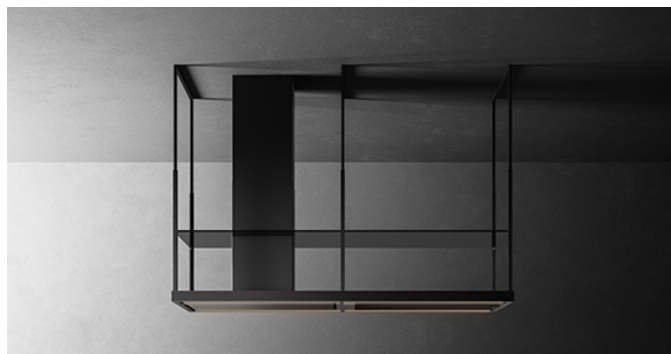

Fotografiet er udelukkende informativt  
Korresponderer ikke nødvendigvis tmed den valgte model

### FUNKTIONER

Kantsug  
Elektronisk kontrolpanel  
Vaskbare rustfrie fedtfilter  
Tilvalg fjernbetjening  
Dæmpbart LED-lys  
Dynamic LED Light (2700K -  
5600K)  
Mulighed for Connection  
kogeplade  
Carbon.Zeo Microtech filter  
(optional)

Availability Carbon.Zeo filter  
KACL.1039 for hoods produced  
from Sept. 2024

### MULIGHEDER FOR TILVALG

#### 01-FJERN

Fjernbetjening med display

#### KACL.1027#HF

Extension kit h125 cm

#### KACL.1039

Carbon.Zeo Microtech filter

#### KACL.557#N

Extension H1200 Island - Black

#### KACL.866

Air flow conveyer til  
recirkulation. Frithængte  
modeller.

### TEKNISK BESKRIVELSE

Installation  
Frithængt  
Dimensioner  
175 cm  
Materiale  
Black matt  
Motor  
800 m<sup>3</sup>/h  
Betjening  
Elektronisk kontrolpanel  
Hastighed  
3 + boost  
Belysning  
Strip Led - 2700 K / 5600 K  
Minimumsafstand  
Gaskomfur: 63 cm  
Kogeplade: 52 cm

### EMBALLAGE: VÆGT OG VOLUMEN

Bruttovægt  
78.9 kg  
Nettovægt  
67 kg  
Volumen  
0.71 m<sup>3</sup>  
Mål på emballage  
Længde  
1905 mm  
Højde  
515 mm  
Dybde  
725 mm


### FORBRUG OG TILSLUTNINGSMULIGHEDER

Maksimalt forbrug  
280 W  
Spænding  
220-240V  
Frekvens  
50-60Hz

Shuko

### DATABLAD MOTOR

Maksimal kapacitet  
680 m<sup>3</sup>/h  
I.E.C. 61591  
Maksimalt støjniveau  
68 dB(A)re1pW  
I.E.C.60704-2-13  
Maksimalt tryk (Pa)  
500 Pa  
Maksimal sugestyrke  
215 W  
ENERGIKLASSE  
B



## EUROPA 175 BLACK

Frithængt - 175 cm - Sort - 800  
m<sup>3</sup>/h - recirkulation

### Sortiment

Design


### EAN Kode

8034122365688

### DATABLAD MOTOR

Motorhastighed	1	2	3	4
Støjniveau dB(A) <sub>re1pW-I.E.C.60704-2-13</sub>	49	56	62	68
Kapacitet (m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
Maksimalt tryk (Pa)	390	420	480	500
Forbrug (W)	132	153	175	215
Luftudtag	150	150	150	150

### KAPACITET / TRYK

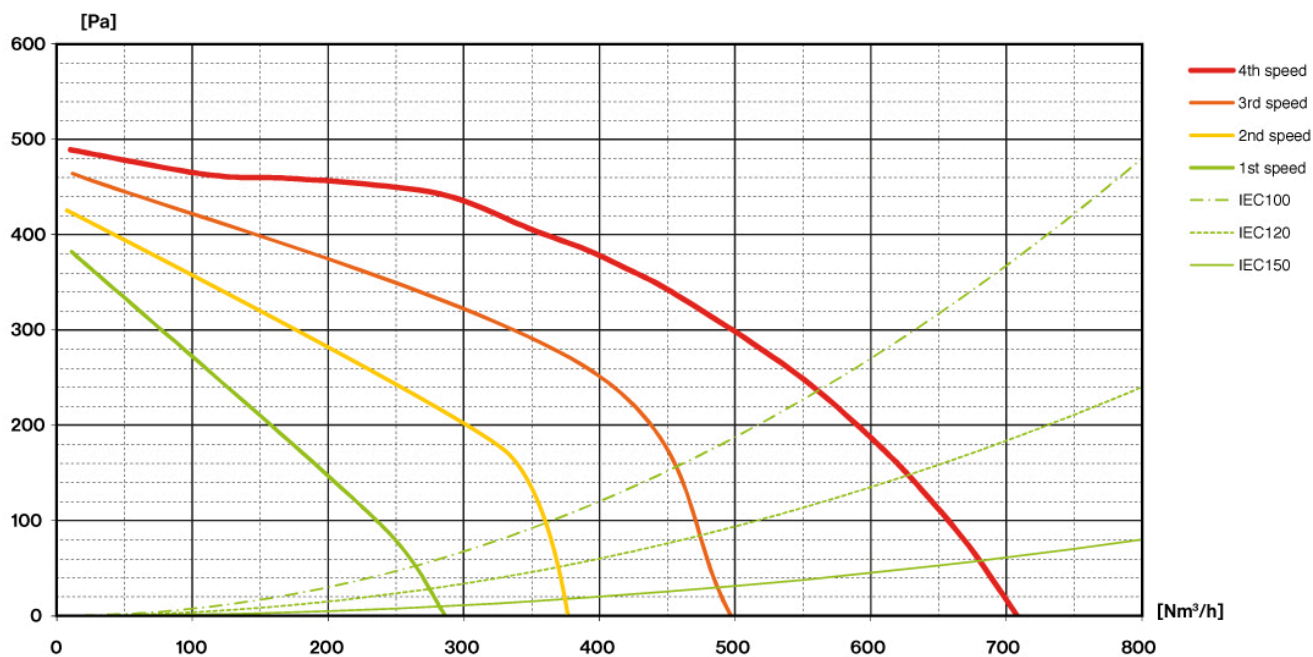

## EUROPA 175 BLACK


Frithængt - 175 cm - Sort - 800  
m<sup>3</sup>/h - recirkulation

### Sortiment

Design

### EAN Kode

8034122365688

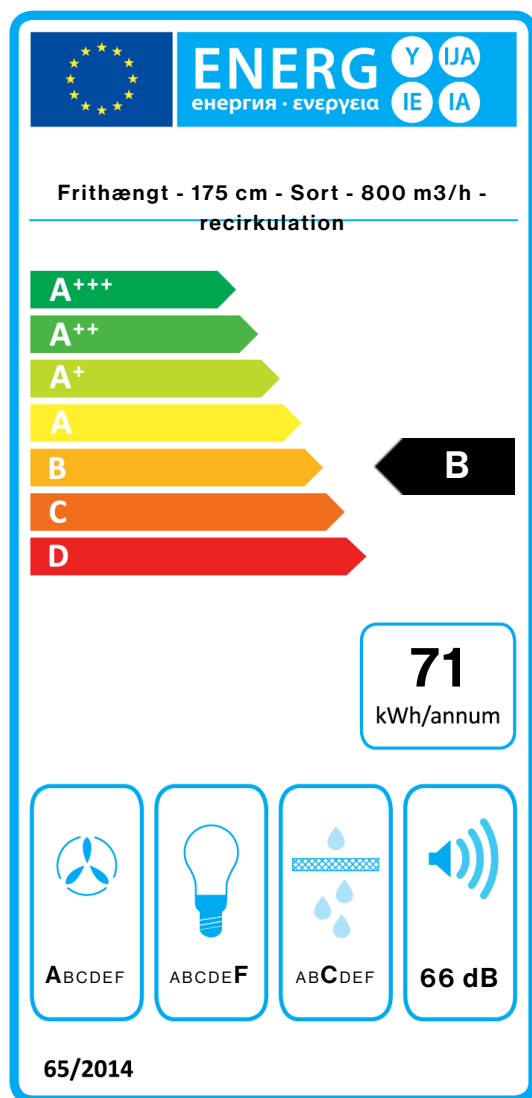

PF		
S	Falmec Spa	
M	Frithængt - 175 cm - Sort - 800 m <sup>3</sup> /h - recirkulation	
AEC	71,2	kWh/a
EEC	B	
FDE	29,2	
FDEC	A	
LE	7,3	
LEC	F	
GFE	80,0	
GFEC	C	
Qmin	313,0	m <sup>3</sup> /h
Qmax	573,0	m <sup>3</sup> /h
Qboost	641,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEI	65,7	
Qbep	366,0	m <sup>3</sup> /h
Pbep	373	Pa
Qboost	641,0	m <sup>3</sup> /h
Wbep	130,0	W
WL	39,00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEI\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax\_Sound pressure level at the highest speed.