


## EUROPA 175 BLACK

Island 175 cm - Black - 800  
m<sup>3</sup>/h

Design

8034122365688

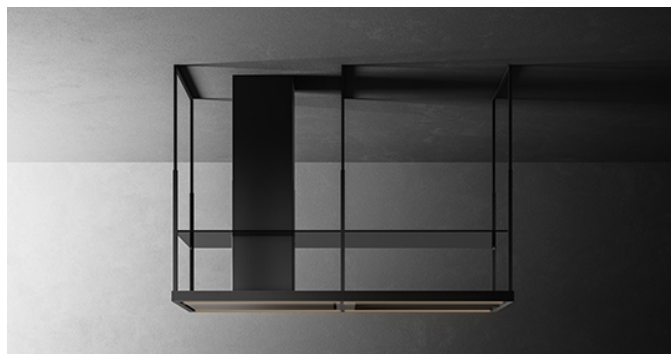

The photograph is purely for information  
It may not correspond to the selected version.

### OMINAISUUDET

Reunaimu  
Elektroniset kytkimet  
Metalliset rasvasuodattimet,  
irroitettavat ja pestävät  
Kaukosäädin lisävarusteena  
Himmennettävä LED valaistus  
Säädettävä LED valosävy (2700  
- 5600 K)  
Dialogijärjestelmän  
automaattinen tila  
Carbon.Zeo Microtech filter  
(optional)

Availability Carbon.Zeo filter  
KACL.1039 for hoods produced  
from Sept. 2024

### OPTIONAL ACCESSORIES

#### 105080053

Kaukosäädin lisävaruste

#### KACL.1027#HF

Extension kit h125 cm

#### KACL.1039

Carbon.Zeo Microtech filter

#### KACL.557#N

Extension H1200 Island - Black

#### KACL.866

Saareke

### TECHNICAL FEATURES

#### Installation type

Saareke

#### Dimensions

175 cm

#### Viimeistelystä

Black matt

#### Motor

800 m<sup>3</sup>/h

#### Type of control

Elektroniset kytkimet

#### Speed settings

3 + boost

#### Lighting

Strip Led - 2700 K / 5600 K

: 63 cm

: 52 cm

### PACKAGING: WEIGHTS AND VOLUMES

78.9 kg

67 kg

0.71 m<sup>3</sup>

1905 mm

515 mm

725 mm

### CONSUMPTION AND CONNECTION FEATURES

280 W

220-240V

50-60Hz

Shuko

### MOTOR TECHNICAL SHEET

680 m<sup>3</sup>/h

I.E.C. 61591


68 dB(A)re1pW

I.E.C.60704-2-13

500 Pa

215 W

B



## EUROPA 175 BLACK


Island 175 cm - Black - 800  
m<sup>3</sup>/h

Design

8034122365688

### MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
(m <sup>3</sup> /h) I.E.C.61591	280	370	480	680
	390	420	480	500
	132	153	175	215
	150	150	150	150

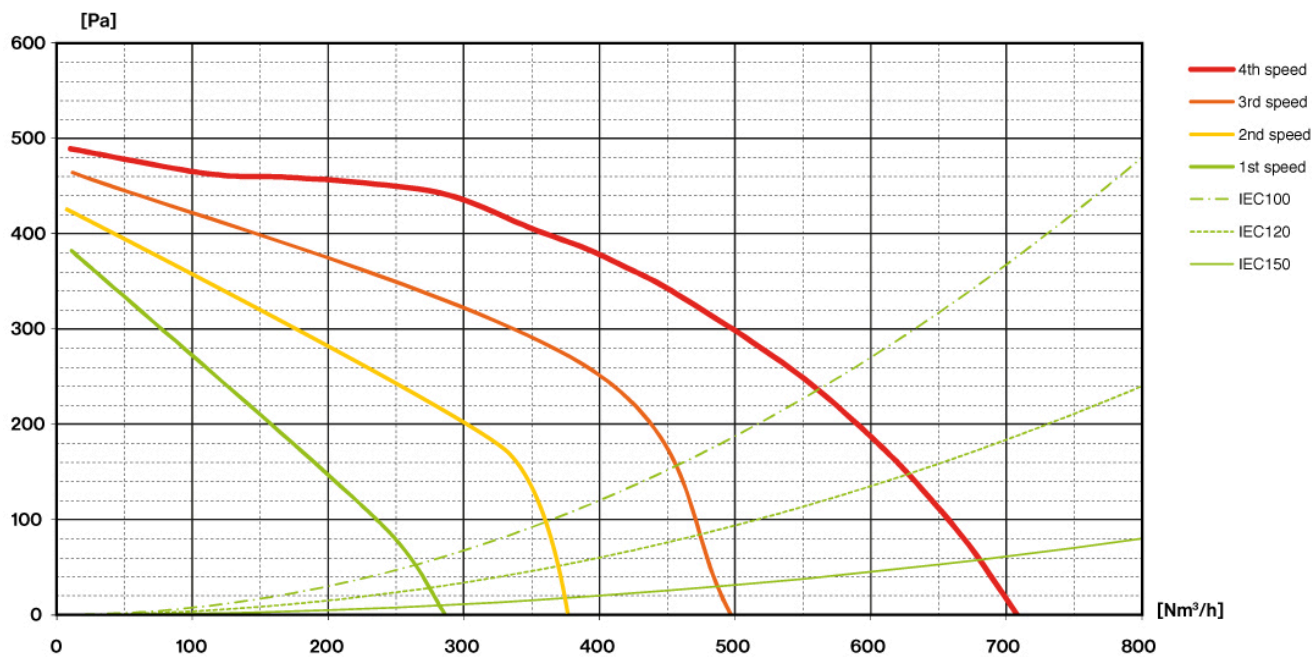


## EUROPA 175 BLACK

Island 175 cm - Black - 800 m<sup>3</sup>/h

Design

8034122365688

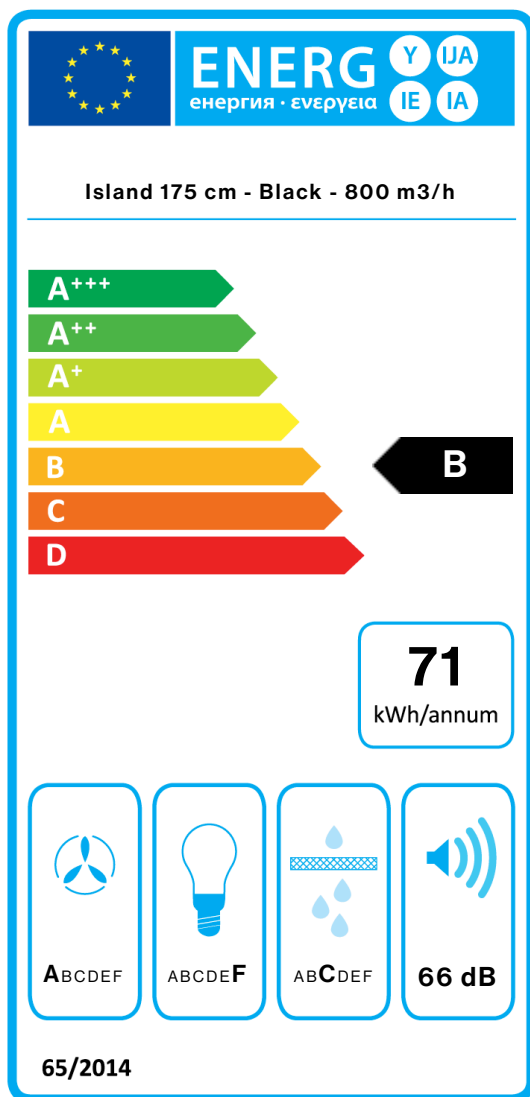

PF		
S	Falmec Spa	
M	Island 175 cm - Black - 800 m <sup>3</sup> /h	
AEC	71,2	kWh/a
EEC	B	
FDE	29,2	
FDEC	A	
LE	7,3	
LEC	F	
GFE	80,0	
GFEC	C	
Qmin	313,0	m <sup>3</sup> /h
Qmax	573,0	m <sup>3</sup> /h
Qboost	641,0	m <sup>3</sup> /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	65,7	
Qbep	366,0	m <sup>3</sup> /h
Pbep	373	Pa
Qboost	641,0	m <sup>3</sup> /h
Wbep	130,0	W
WL	39,00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

**PF\_Product fiche according to 65/2014** S\_Supplier name / M\_Model identification / AEC\_Annual Energy Consumption (AEC hood) / EEC\_Energy Efficiency class / FDE\_Fluid Dynamic Efficiency (FDE hood) / FDEC\_Fluid Dynamic Efficiency class / LE\_Lighting Efficiency (LE hood) / LEC\_Lighting Efficiency class / GFE\_Grease Filtering Efficiency / GFEC\_Grease Filtering Efficiency class / Qmin\_Air flow (in m<sup>3</sup>/h) at min speed in normal use / Qmax\_Air flow (in m<sup>3</sup>/h) at max speed in normal use / Qboost\_Air flow (in m<sup>3</sup>/h) at intensive or boost setting (max air-flow) / SPEmin\_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax\_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost\_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO\_Power consumption in off mode (Po) / Ps\_Power consumption in stand by mode (Ps). **PI\_Additional information according to 66/2014** F\_Time increase factor / EEl\_Energy Efficiency Index / Qbep\_Measured air flow rate at best efficiency point / Pbep\_Measured air pressure at best efficiency point / Qboost\_Maximum air flow / Wbep\_Measured electric power input at best efficiency point / WL\_Nominal power of the lighting system / Emiddle\_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax\_Sound pressure level at the highest speed.