

EUROPA 175 BLACK

Versiune

Insula - 175 cm - negru - 800
m³/h

Designer

Colectie

Design

Cod EAN

8034122365688

CARACTERISTICI

Aspiratie perimetrala
Control electronic
Filtru de grasime metalic,
detasabil si lavabil
Optional - telecomanda
Dimmable led lighting
Dynamic LED Light (2700K -
5600K)
Dialogue system cu mod
automat
Carbon.Zeo Microtech filter
(optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

ACCESORII OPTIONALE

105080053

Telecomanda

KACL.1027#HF

Extension kit h125 cm

KACL.1039

Carbon.Zeo Microtech filter

KACL.557#N


Extension H1200 Island - Black

KACL.866

Conveier de aer pentru verisunea
in recirculare (Insula)

CARACTERISTICI TEHNICE

Tip de instalare
Insula
Dimensiuni
175 cm
Finisaj
Black matt
Motor
800 m³/h
Tipul panoului de control
Control electronic
Setari de viteza
3 + boost
Illuminare
Strip Led - 2700 K / 5600 K
Distanta minima
Plita cu gaz: 63 cm
Plita electrica: 52 cm

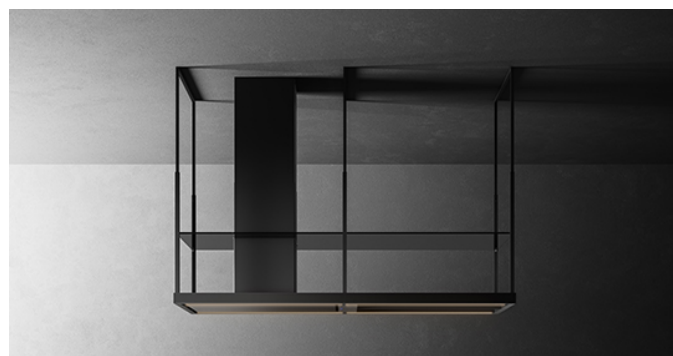

Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

AMBALARE: GREUTATE SI VOLUM

Greutate bruta

78.9 kg

Greutate neta

67 kg

Volum

0.71 m³

Dimensiuni ambalaj

Lungime

1905 mm

Inaltime

515 mm

Adancime

725 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim

280 W

Curent

220-240V

Frecventa

50-60Hz

Tip stecher

Shuko

FISA TEHNICA MOTOR

Capacitate maxima

680 m³/h

I.E.C. 61591

Nivel de zgomot maxim

68 dB(A)re1pW

I.E.C.60704-2-13

Presiune maxima (Pa)


500 Pa

Putere maxima motor

215 W

CLASA DE ENERGIE

B



EUROPA 175 BLACK

Versiune

Insula - 175 cm - negru - 800
m3/h

Designer

Colectie

Design


Cod EAN

8034122365688

FISA TEHNICA MOTOR

Viteza motorului	1	2	3	4
Nivel de zgomot dB(A)re1pW-I.E.C.60704-2-13	49	56	62	68
Capacitate (m3/h) I.E.C.61591	280	370	480	680
Presiune maxima (Pa)	390	420	480	500
Putere (W)	132	153	175	215
Evacuare aer	150	150	150	150

CAPACITATE/ PRESIUNE

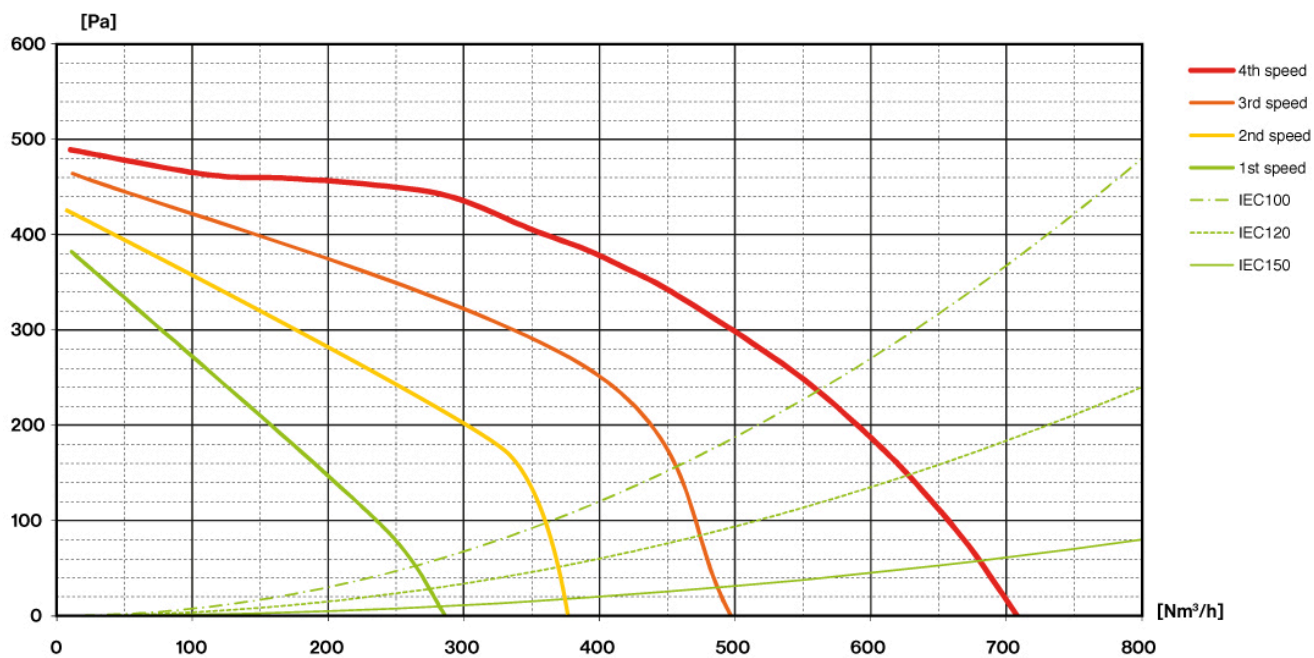

EUROPA 175 BLACK

Versiune

Insula - 175 cm - negru - 800 m3/h

Designer


Colectie

Design

Cod EAN

8034122365688

ETICHETA DE ENERGIE

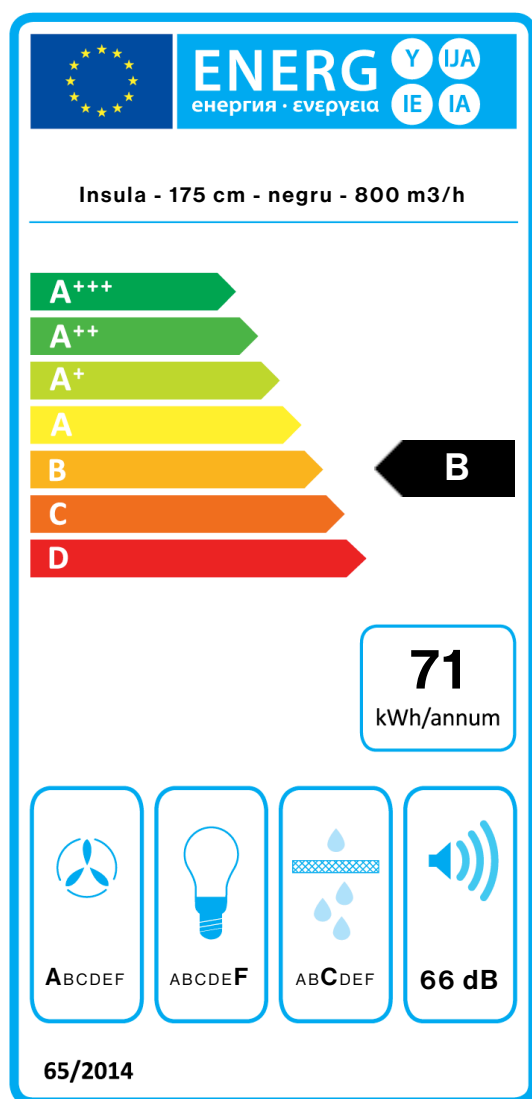

PF		
S	Falmec Spa	
M	Insula - 175 cm - negru - 800 m3/h	
AEC	71,2	kWh/a
EEC	B	
FDE	29,2	
FDEC	A	
LE	7,3	
LEC	F	
GFE	80,0	
GFEC	C	
Qmin	313,0	m ³ /h
Qmax	573,0	m ³ /h
Qboost	641,0	m ³ /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	65,7	
Qbep	366,0	m ³ /h
Pbep	373	Pa
Qboost	641,0	m ³ /h
Wbep	130,0	W
WL	39,00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.