

EUROPA 175 BLACK

Versiyon

Island 175 cm - Black - 800
m³/h

Tasarımcı

Koleksiyon

Design

EAN kodu

8034122365688

ÖZELLİKLER

Perimetrik emiş
Elektronik kontrol
Çıkarılabilir ve yıkanabilir
Metal yağ filtresi
Opsiyonel uzaktan kumanda
Aydınlık seviyesi ayarlanabilir
led aydınlatma
Dinamik Led aydınlatma (2700K
- 5600K)
Otomatik modlu diyalog sistemi
Carbon.Zeo Microtech filter
(optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPSİYONEL AKSESUARLAR

105080053

Uzaktan Kumanda

KACL.1027#HF

Extension kit h125 cm

KACL.1039

Carbon.Zeo Microtech filter

KACL.557#N

Extension H1200 Island - Black


KACL.866

Resirkülasyon versiyonlar (Ada)

için hava akım taşıyıcısı

TEKNİK ÖZELLİKLER

Kurulum tipi
Ada
Ölçüler
175 cm
Finişler
Black matt
Motor
800 m³/h
Kontrol tipi
Elektronik kontrol
Hız ayarı
3 + boost
Aydınlatma
Strip Led - 2700 K / 5600 K
Minimum uzaklık
Gazlı ocak: 63 cm
Elektrikli ocak: 52 cm

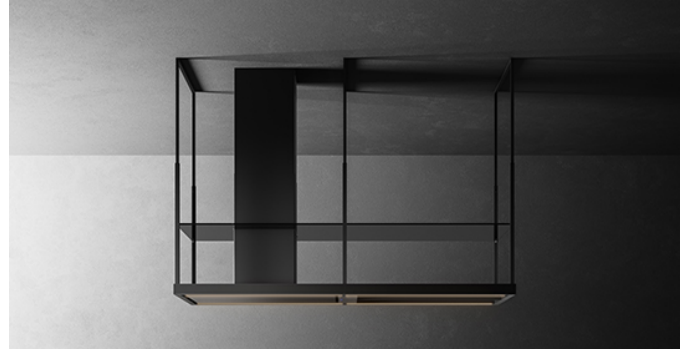

Fotoğraf tamamen bilgi amaçlıdır
Seçili versiyona ait olmayabilir.

PAKETLEME: AĞIRLIK VE HACİM


Brüt ağırlık
78.9 kg
Net ağırlık
67 kg
Hacimler
0.71 m³
Paketleme ölçüsü
Uzunluk
1905 mm
Yükseklik
515 mm
Derinlik
725 mm

TÜKETİM VE BAĞLANTI ÖZELLİKLERİ

Maksimum tüketim
280 W
Akım
220-240V
Frekans
50-60Hz
Fiş tipi
Shuko

MOTOR TEKNİK VERİLERİ

Maksimum kapasite
680 m³/h
I.E.C. 61591
Maksimum ses seviyesi
68 dB(A)re1pW
I.E.C.60704-2-13
Maksimum basınç (Pa)
500 Pa
Maksimum motor gücü
215 W
ENERJİ SINIFI
B



EUROPA 175 BLACK

Versiyon

Island 175 cm - Black - 800
m3/h

Tasarımcı

Koleksiyon

Design


EAN kodu

8034122365688

MOTOR TEKNİK VERİLERİ

Motor hızı	1	2	3	4
Ses seviyesi dB(A) _{re1pW-I.E.C.60704-2-13}	49	56	62	68
Kapasite (m3/h) I.E.C.61591	280	370	480	680
Maksimum basınç (Pa)	390	420	480	500
Gücü (W)	132	153	175	215
Hava çıkışı	150	150	150	150

KAPASİTE / BASINÇ

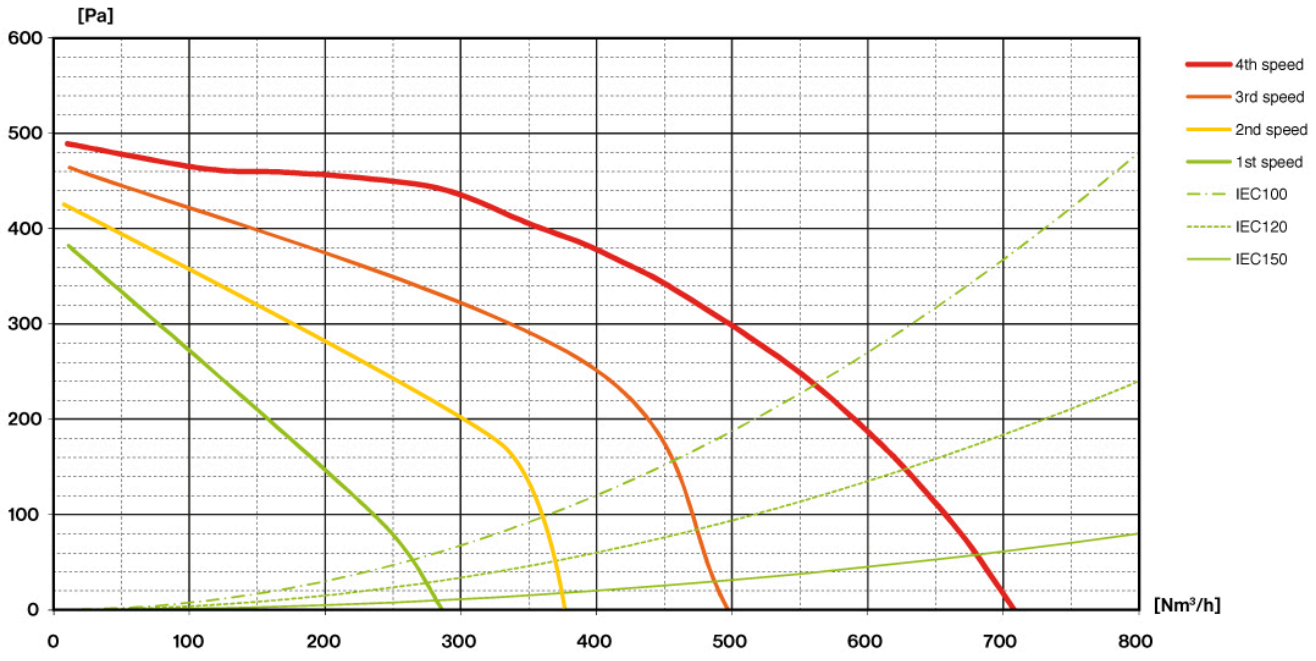

EUROPA 175 BLACK

Versiyon

Island 175 cm - Black - 800 m³/h

Tasarımcı


Koleksiyon

Design

EAN kodu

8034122365688

ENERJİ ETİKETİ

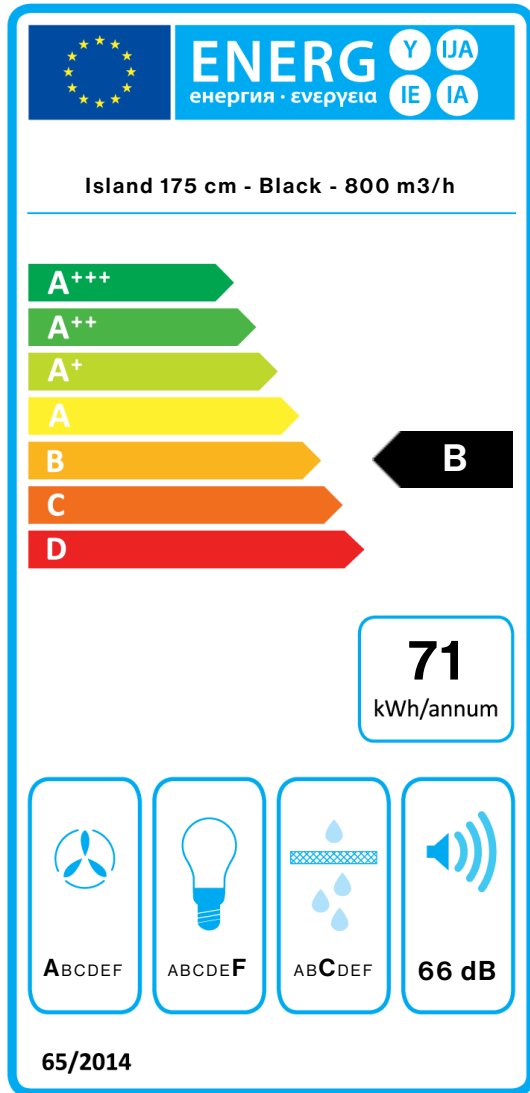

PF		
S	Falmec Spa	
M	Island 175 cm - Black - 800 m ³ /h	
AEC	71,2	kWh/a
EEC	B	
FDE	29,2	
FDEC	A	
LE	7,3	
LEC	F	
GFE	80,0	
GFEC	C	
Qmin	313,0	m ³ /h
Qmax	573,0	m ³ /h
Qboost	641,0	m ³ /h
SPEmin	51	dBa
SPEmax	66	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.9	
EEl	65,7	
Qbep	366,0	m ³ /h
Pbep	373	Pa
Qboost	641,0	m ³ /h
Wbep	130,0	W
WL	39,00	W
Emiddle	285	lux
Lwa-SPEmax	66	dBa

65/2014'e göre PF_Ürün fişi S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). 66/2014'e göre PI_Ek bilgi F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency

point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.