

VERSO EASY

Version
Wall - 55 cm - White - 800 m3/h

Designer

Collection
Design

EAN code
8034122365619



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Touch control + 24 h function
- Metallic grease filter, removable and washable
- Remote control (optional)
- Opening frontal
- Dimmable lighting
- Dynamic Light (2700K - 5600K)
- Double suction area (frontal and lower)
- Dialogue system with auto mode
- Carbon.Zeo Microtech filter

OPTIONAL ACCESSORIES

- 105080053
Remote control
- KACL.1055
Filter Carbon.Zeo Microtech renewable

TECHNICAL FEATURES



- Installation type
Wall
- Dimensions
55 cm
- Finishing
Tempered glass with white finishing
- Motor
800 m³/h
- Type of control
Touch control
- Speed
3 + boost
- Lighting
Led 2x1,2 W - 2700 K / 5600 K
- Charcoal filter
Filter Carbon.Zeo Microtech renewable (included)
- Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
19.4 kg
- Net weight
15.2 kg
- Volumes
0.19 m³
- Packaging size
Length
710 mm
Height
450 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- ENERGY CLASS
A



VERSO EASY


Version
Wall - 55 cm - White - 800 m3/h

Designer

Collection
Design

EAN code
8034122365619

ENERGY LABEL

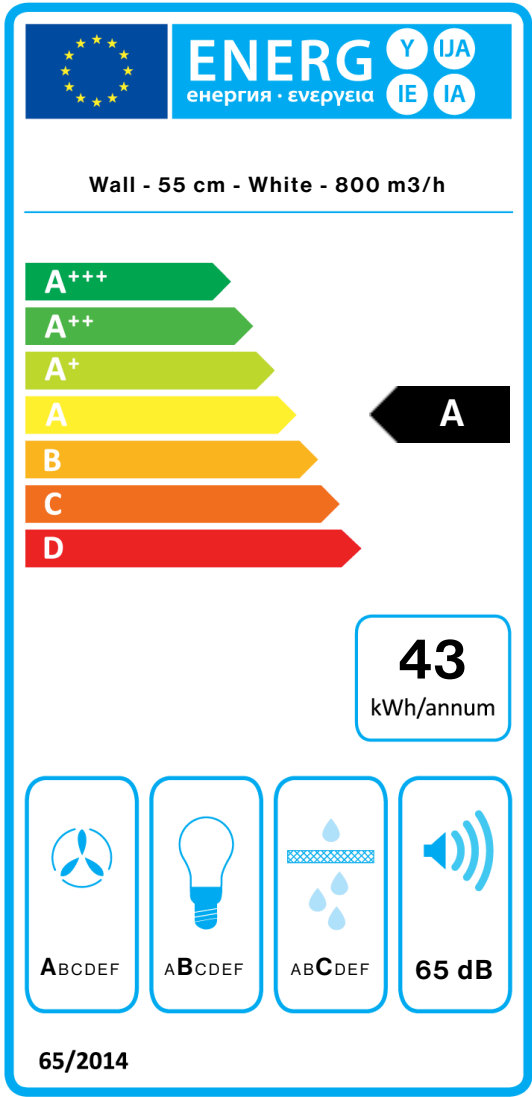

PF		
S	Falmec Spa	
M	Wall - 55 cm - White - 800 m3/h	
AEC	43,0	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	299,0	m³/h
Qmax	584,0	m³/h
Qboost	708,0	m³/h
SPEmin	50	dBa
SPEmax	65	dBa
SPEboost	69	dBa
PO	-	W
PS	0,48	W
PI		
F	0.8	
EEl	46,8	
Qbep	429,0	m³/h
Pbep	375	Pa
Qboost	708,0	m³/h
Wbep	134,0	W
WL	5,30	W
Emiddle	114	lux
Lwa-SPEmax	65	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.