

FUSION

Version

Wall - 85 cm - Black - 800 m³/h

Designer

Collection

Design

EAN code

8034122366241



*The photograph is purely for information
It may not correspond to the selected version.*

FEATURES

Touch control
Metallic grease filter, removable and washable
Remote control (optional)
Dimmable lighting
Dynamic Light (2700K - 5600K)
Dialogue system
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter KACL.1039 for hoods produced from Sept. 2024

OPTIONAL ACCESSORIES

105080053

Remote control

KACL.1039

Carbon.Zeo Microtech filter

KACL.865

Air flow conveyor for re-circulation version (Wall)

KCQAN.00#N

Optional chimney - Black

TECHNICAL FEATURES

Installation type

Wall

Dimensions

85 cm

Finishing

Painted steel

Black glass satin finishing

Motor

800 m³/h

Type of control

Touch control

Speed

3 + boost

Lighting

Strip Led 5,8 W - 2700 K / 5600 K

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

30 kg

Net weight

25 kg

Volumes

0.27 m³

Packaging size

Length

950 mm

Height

440 mm

Depth

655 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage



220-240V

Frequency

50-60Hz

ENERGY CLASS

A



FUSION

Version

Wall - 85 cm - Black - 800 m3/h

Designer


Collection

Design

EAN code

8034122366241

ENERGY LABEL

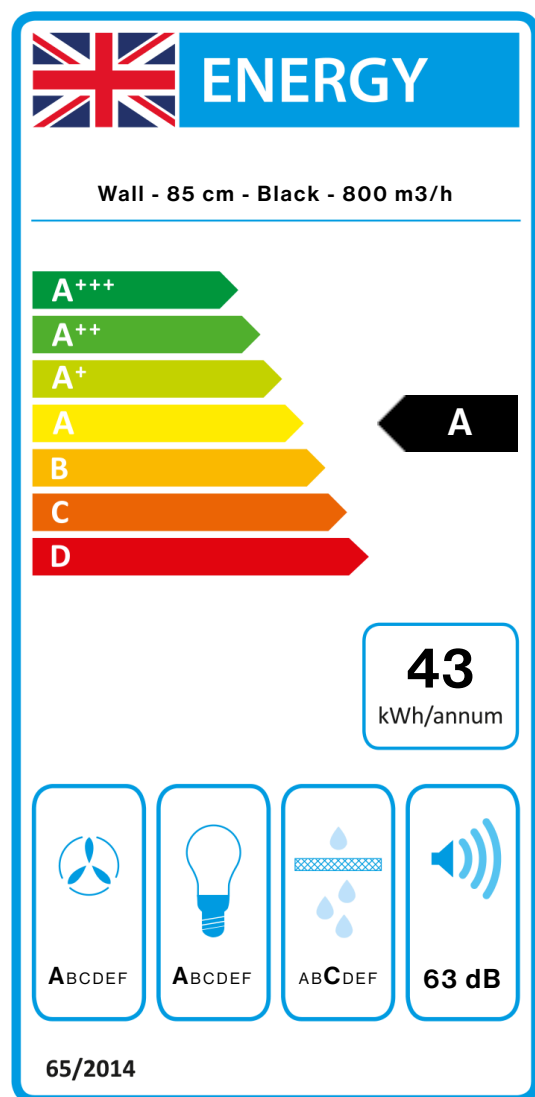

PF		
S	Falmec Spa	
M	Wall - 85 cm - Black - 800 m3/h	
AEC	43,4	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	29,6	
LEC	A	
GFE	82,0	
GFEC	C	
Qmin	299,0	m ³ /h
Qmax	584,0	m ³ /h
Qboost	708,0	m ³ /h
SPEmin	49	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	0.8	
EEl	47,1	
Qbep	429,0	m ³ /h
Pbep	375	Pa
Qboost	708,0	m ³ /h
Wbep	134,0	W
WL	5,80	W
Emiddle	172	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.