

FUSION

Version
Wall - 85 cm - Black - 800 m3/h

Designer

Collection
Design

EAN code
8034122366241



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

- Touch control
- Metallic grease filter, removable and washable
- Remote control (optional)
- Dimmable lighting
- Dynamic Light (2700K - 5600K)
- Dialogue system with auto mode
- Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

OPTIONAL ACCESSORIES

- 105080053
Remote control
- KACL.1039
Carbon.Zeo Microtech filter
- KACL.865
Air flow conveyor for re-circulation version (Wall)
- KCQAN.00#N
Optional chimney - Black

TECHNICAL FEATURES



- Installation type
Wall
- Dimensions
85 cm
- Finishing
Painted steel
- Black glass satin finishing
- Motor
800 m³/h
- Type of control
Touch control
- Speed
3 + boost
- Lighting
Strip Led 5,8 W - 2700 K / 5600 K
- Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
30 kg
- Net weight
25 kg
- Volumes
0.27 m³
- Packaging size
Length
950 mm
Height
440 mm
Depth
655 mm

CONSUMPTION AND CONNECTION FEATURES

- Maximum consumption
280 W
- Voltage
220-240V
- Frequency
50-60Hz
- ENERGY CLASS
A



FUSION


Version
Wall - 85 cm - Black - 800 m3/h

Designer

Collection
Design

EAN code
8034122366241

ENERGY LABEL

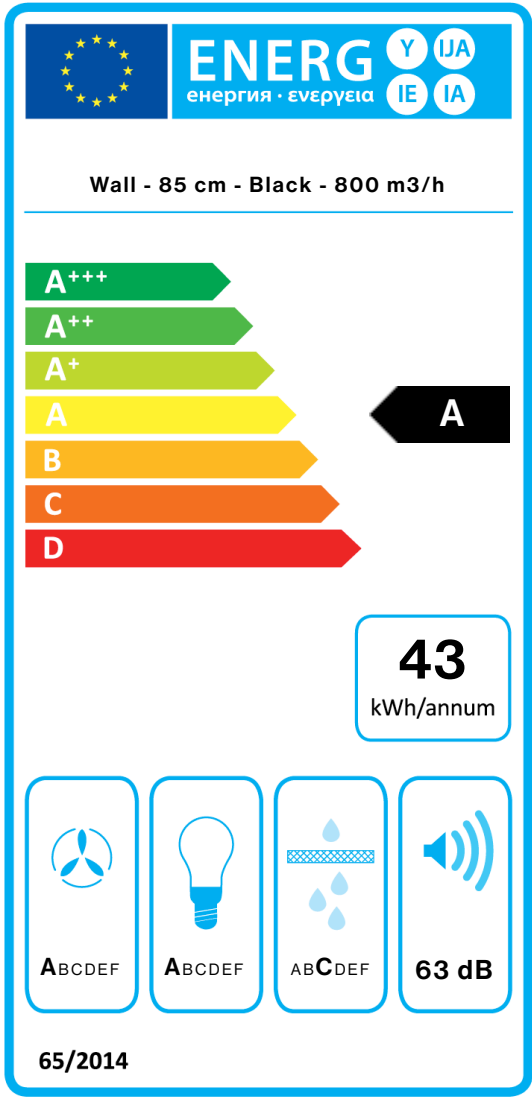

PF		
S	Falmec Spa	
M	Wall - 85 cm - Black - 800 m3/h	
AEC	43,4	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	29,6	
LEC	A	
GFE	82,0	
GFEC	C	
Qmin	299,0	m³/h
Qmax	584,0	m³/h
Qboost	708,0	m³/h
SPEmin	49	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	0.8	
EEl	47,1	
Qbep	429,0	m³/h
Pbep	375	Pa
Qboost	708,0	m³/h
Wbep	134,0	W
WL	5,80	W
Emiddle	172	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.