

FUSION

Versiune

Perete - 85 cm - negru satinat -
800 m³/h

Colectie

Design

Cod EAN

8034122366241



Fotografie cu caracter strict orientativ
Aceasta poate sa nu corespunda versiunii selectate

CARACTERISTICI

Touch control
Filtru de grasime metalic, detasabil si lavabil
Optional - telecomanda
Dimmable led lighting
Dynamic LED Light (2700K - 5600K)
Dialogue system cu mod automat
Carbon.Zeo Microtech filter (optional)

Availability Carbon.Zeo filter
KACL.1039 for hoods produced
from Sept. 2024

ACCESORII OPTIONALE

105080053

Telecomanda

KACL.1039

Carbon.Zeo Microtech filter

KACL.865

Conveier de aer pentru verisunea
in recirculare (Perete)

KCQAN.00#N

Optional chimney (Black)

CARACTERISTICI TEHNICE



Tip de instalare
De perete
Dimensiuni
85 cm
Finisaj
Inox vopsit
Sticla satinata cu finisaj negru
Motor
800 m³/h
Tipul panoului de control
Touch control
Setari de viteza
3 + boost
Iluminare
Strip Led 5,8 W - 2700 K / 5600 K
Distanta minima
Plita cu gaz: 52 cm
Plita electrica: 52 cm

AMBALARE: GREUTATE SI VOLUM

Greutate bruta
30 kg
Greutate neta
25 kg
Volum
0.27 m³
Dimensiuni ambalaj
Lungime
950 mm
Inaltime
440 mm
Adancime
655 mm

CARACTERISTICI CONSUM SI CONEXIUNE

Consum maxim
280 W
Curent
220-240V
Frecventa
50-60Hz
CLASA DE ENERGIE
A



FUSION

Versiune

Perete - 85 cm - negru satinat -
800 m3/h


Colectie

Design

Cod EAN

8034122366241

ETICHETA DE ENERGIE

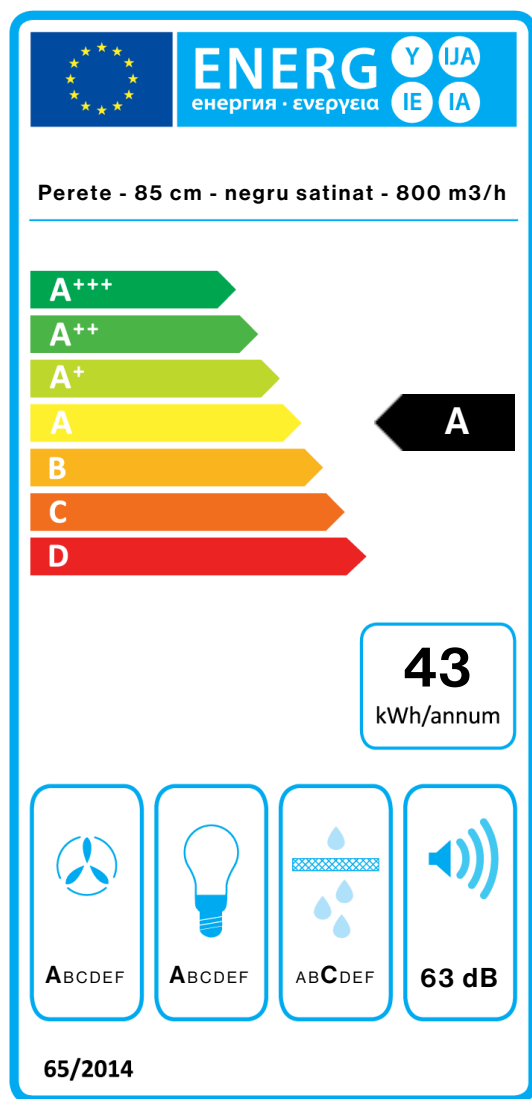

PF		
S	Falmec Spa	
M	Perete - 85 cm - negru satinat - 800 m3/h	
AEC	43,4	kWh/a
EEC	A	
FDE	33,3	
FDEC	A	
LE	29,6	
LEC	A	
GFE	82,0	
GFEC	C	
Qmin	299,0	m ³ /h
Qmax	584,0	m ³ /h
Qboost	708,0	m ³ /h
SPEmin	49	dBa
SPEmax	63	dBa
SPEboost	67	dBa
PO	-	W
PS	0,28	W
PI		
F	0.8	
EEl	47,1	
Qbep	429,0	m ³ /h
Pbep	375	Pa
Qboost	708,0	m ³ /h
Wbep	134,0	W
WL	5,80	W
Emiddle	172	lux
Lwa-SPEmax	63	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.